

SOFTLINE

SERIES



PLAN

50 Δ t

(75/65/20°C)

K1



K2



Height mm	Length mm	White UIN	Colour UIN	Heat output		White UIN	Colour UIN	Heat output	
				Watts	Btu/hr			Watts	Btu/hr
300	500	85301105	85301105c	235	802	85302205	85302205c	465	1587
	1000	85301110	85301110c	469	1600	85302210	85302210c	929	3170
	1500	85301115	85301115c	704	2402	85302215	85302215c	1394	4756
450	400	85451104	85451104c	280	955	85452204	85452204c	518	1767
	600	85451106	85451106c	421	1436	85452206	85452206c	778	2655
	800	85451108	85451108c	561	1914	85452208	85452208c	1037	3538
	1000	85451110	85451110c	701	2392	85452210	85452210c	1296	4422
	1200	85451112	85451112c	841	2869	85452212	85452212c	1555	5306
	1400	85451114	85451114c	981	3347	85452214	85452214c	1814	6189
	1600	85451116	85451116c	1122	3828	85452216	85452216c	2074	7076
	1800	85451118	85451118c	1262	4306	85452218	85452218c	2333	7960
600	400	85601104	85601104c	364	1242	85602204	85602204c	654	2231
	600	85601106	85601106c	547	1866	85602206	85602206c	980	3344
	800	85601108	85601108c	729	2487	85602208	85602208c	1307	4459
	1000	85601110	85601110c	911	3108	85602210	85602210c	1634	5575
	1200	85601112	85601112c	1093	3729	85602212	85602212c	1961	6691
	1400	85601114	85601114c	1275	4350	85602214	85602214c	2288	7807
	1600	85601116	85601116c	1458	4975	85602216	85602216c	2614	8919
	1800	85601118	85601118c	1640	5596	85602218	85602218c	2941	10035
	2000	85601120	85601120c	1822	6217	85602220	85602220c	3268	11150

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

COLOUR OPTIONS



Comes in White as standard (RAL 9016).


Please note that once a coloured radiator has been ordered, it cannot be cancelled or returned.




www.stelrad.com
Telephone: 0800 876 6813

MOUNTING BRACKETS

All dimensions in mm. Inches in brackets.

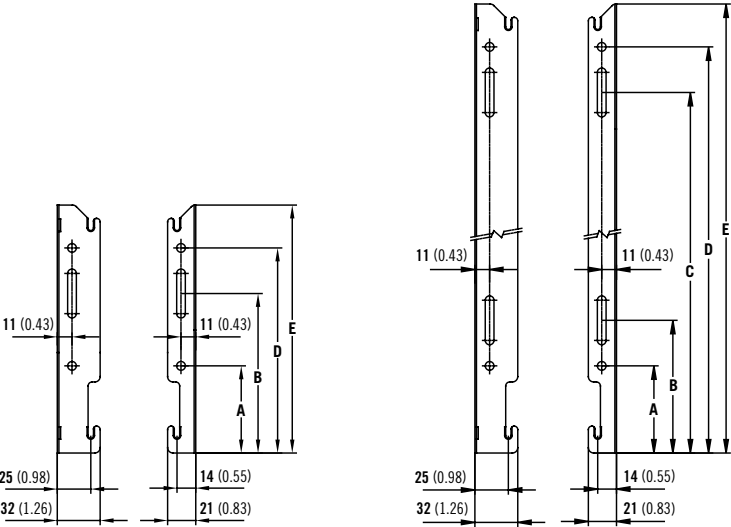


Dimensions	mm	inches	mm	inches	mm	inches	mm	inches
Height	300	11.81	450	17.72	600	23.62	700	27.56
A	65	2.56	65	2.56	65	2.56	65	2.56
B	119	4.69	99	3.90	99	3.90	99	3.90
C	-	-	269	10.59	419	16.50	519	20.43
D	153	6.02	303	11.93	453	17.83	553	21.77
E	185	7.28	335	13.19	485	19.09	585	23.03

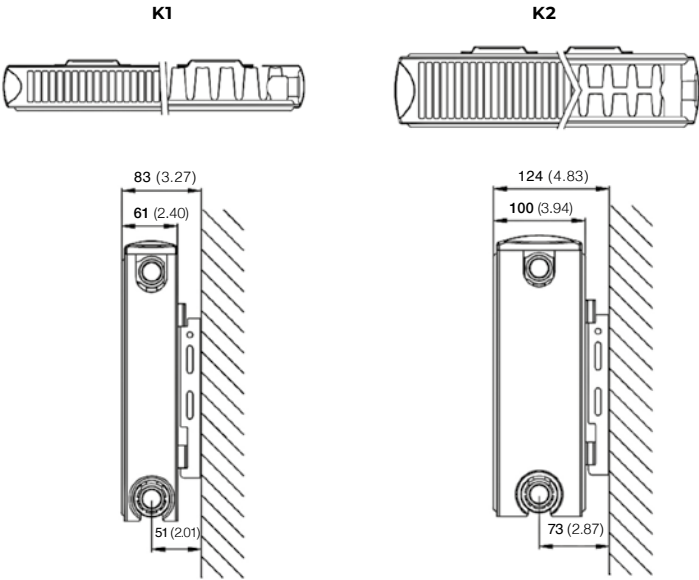

SOFTLINE PLAN




K1 & K2 LUG POSITIONS (New as of June 2016).
All dimensions in mm. Inches in brackets.

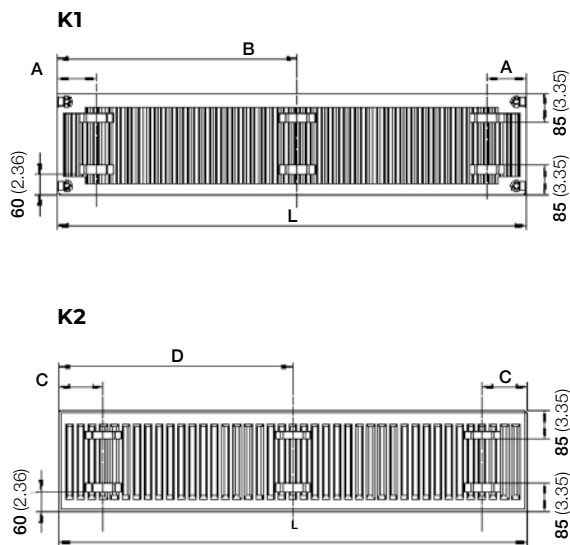

L	K1				K2			
	A		B		C		D	
	mm	in	mm	in	mm	in	mm	in
400	117	4.60	-	-	133	5.24	-	-
500 - 1100	150	5.90	-	-	133	5.24	-	-
1200 - 1600	150	5.90	-	-	133	5.24	-	-
1800 - 2000	150	5.90	(L/2) +17		133	5.24	L/2	

CONNECTIONS
Each radiator comes with ½" inlet connections as standard.


PIPING OPTIONS

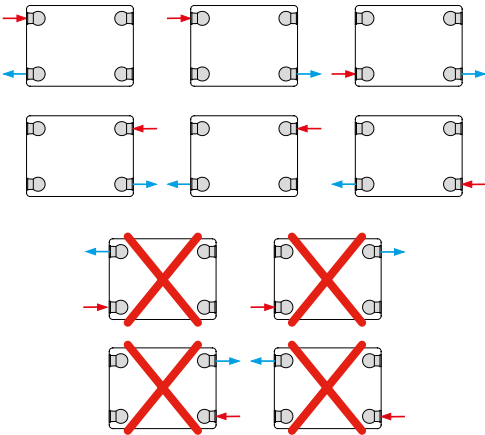

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	K1			K2		
Height	300	450	600	300	450	600
W/m at 75/65/20	469	701	911	929	1296	1634
n-coefficients	1.30	1.28	1.27	1.29	1.30	1.32
Heated surface area (m²/m)	2.09	3.37	4.66	3.51	5.62	7.74
Weight (kg/m)	11.88	18.26	24.65	19.60	29.80	40.00
Water contents (l/m)	1.89	2.49	3.25	3.70	5.05	6.60
Wall to tap centre (mm)	51	51	51	73	73	73

PRESSURE DROPS

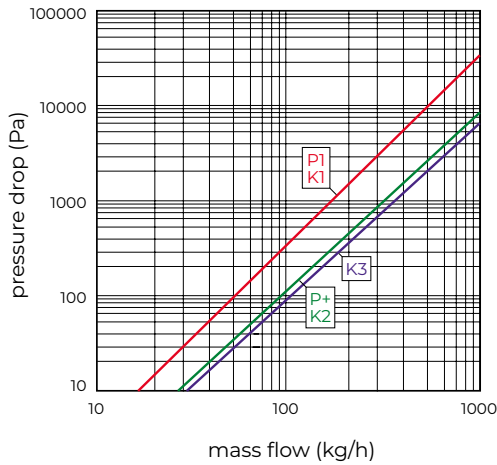

Type	Kv
P1 / K1	1.67
P+ / K2	3.32
K3	3.65

55 COLOUR OPTIONS. 14-DAY LEAD TIME.

Stelrad Radiators are available in white (RAL 9016) as standard, however this radiator is **now available in a variety of colours within 14 working days.**

STANDARD COLOUR




RAL 9016
Traffic white

To request up to 5 colour samples, please email sales@stelrad.com or call **0800 876 6813** with your choices and address details.

The colours shown are reproduced as accurately as this printing process will allow.

RAL COLOURS - Satin Finish



1001
Beige



1013
Oyster white



1015
Light ivory



9001
Cream



9002
Grey white




9003
Signal white




9010
Pure white



9016
Traffic white




9018
Papyrus white




9005
Jet black



9017
Traffic black



7001
Silver grey




7011
Iron grey




7015
Slate grey



7016
Anthacite grey




7030
Stone grey




7032
Pebble grey




7035
Light grey




7036
Platinum grey



7037
Dusty grey



7038
Agate grey



7039
Quartz grey




5002
Ultramarine blue




5010
Gentian blue




5012
Light blue



5014
Pigeon blue



5015
Sky blue




5022
Night blue

Please note: When a coloured radiator or radiators have been ordered they cannot be cancelled or returned.


For further information on RAL colours please visit www.ralcolorchart.com



RAL COLOURS (continued)




5024
Pastel blue




6005
Light moss green




6018
Yellow green




6019
Pastel green




6020
Chrome green



6027
Light green



6033
Mint turquoise



6034
Pastel turquoise




3000
Flame red



3002
Carmine red



3003
Ruby red



3005
Wine red



2003
Pastel orange



2008
Bright red orange



1004
Golden yellow




1016
Sulphur yellow




1021
Colza yellow




3015
Light pink




8014
Sepia



8017
Chocolate brown



7026
Granite



1019
Cappuccino




8028
Terra brown




9011
Graphite black


METALLIC



1247M
Bronze metallic



7001M
Silver metallic



9007M
Grey metallic

Please note: When a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

For further information on RAL colours please visit
www.ralcolorchart.com