



VITA SERIES

JANUARY 2026



KEEPING YOU WARM
SINCE 1936



OPEN UP A WORLD OF COLOUR



Vita Column Horizontal
RAL 6033 Mint turquoise

Order in one of the 55 standard
RAL colours and finishes.

Applicable for the Vita Silhouette, Deco, Plan,
Column, Concord, Caliente Rail, Concord Rail
and Classic Towel Rail ranges.

stelradprofessional.com



LEADING THE WAY

Stelrad has been manufacturing high quality, steel radiators since 1936, so it's safe to say we know a thing or two about heating.

Since our beginnings, we've grown into the UK's number one radiator brand, manufacturing and distributing over 2.5 million radiators and products every year. With an expert research facility in Belgium, we're dedicated to continually developing innovative products and widening our extensive range to enable you to offer your customers the largest selection of technically-advanced radiator styles and sizes in the UK.

THINGS TO CONSIDER

Innovation, development and customer service are at the heart of everything we do, and we offer ranges of radiators to suit your every need. Safety, designer style, kitchens, bathrooms - a huge choice, many available in 55 colours to match your taste and decor.

Ordering is easy, and you can download simple fitting instructions and guides from our website. So when you're thinking about radiators, there's just one name to consider... Stelrad.

PRODUCT RANGES

Discover our range of designer radiators, expertly designed and styled to suit every taste and interior. You can choose from a range of shapes, sizes, colours and finishes.

COLOURS

These days you are not limited to a traditional white radiator, you have the freedom to choose the most suitable colour radiator which will complement the colour scheme of your room.



FITTING

Plumbers and installers are at the heart of everything we do. Our definitive range of products offer a solution for every project and requirement. View our helpful range of downloadable installation documents and videos at stelradprofessional.com

QUOTE SERVICE

Our nationwide Specification and Quotes Teams are on hand to discuss your requirements for your project. Contact our expert Quotes Team for a personalised quote on 01709 527211 or email stelrad.quotes@stelrad.com

ORDERING

If you would like to order a product, please visit stelradprofessional.com to find your nearest stocking branch.

VITA SERIES

The Vita Series is now bigger and better than ever before.

The Vita Series is made up of expertly selected radiators and towel rails for the home, which provide unbeatable quality & design to suit every room and decor.





New

Vita Compact 200	8
Vita Compact	10
Vita Compact K3	12

New

Vita Compact 900	14
Vita Compact 1200	16
Vita Compact Vertical	18
Vita Silhouette	20
Vita Silhouette Concept	22
Vita Deco	24
Vita Deco Concept	26
Vita Deco Vertical	28
Vita Deco Vertical Concept	30
Vita Plan	32
Vita Plan Concept	34
Vita Plan Vertical	36
Vita Plan Vertical Concept	38
Vita Ultra	40
Vita Column Horizontal	42
Vita Column Concept	44
Cast Iron Column	46
Vita Column Vertical	48
Vita Column Vertical Concept	50
Vita Concord Plane	52
Vita Concord Vertical	54
Vita Concord Vertical Concept	56
Vita Concord Slimline	58
Vita Concord Slimline Concept	60
Classic Towel Rail	62
Stainless Steel Towel Rail	64
Caliente Rail	66
Concord Rail	68
Como	70
Concord Side Chrome	72
Concord Side Concept	74
Vertical Ultra	76
Lecco	78
Concord Chrome Vertical	80
Additional information, colours and accessories	82-89

WHY NOT UPGRADE?

**UPGRADE TO A
VITA PLAN**



VITA PLAN



VITA PLAN CONCEPT



**UPGRADE TO A
VITA DECO**



VITA DECO



VITA DECO CONCEPT




**UPGRADE TO A
VITA SILHOUETTE**



VITA SILHOUETTE



VITA SILHOUETTE CONCEPT

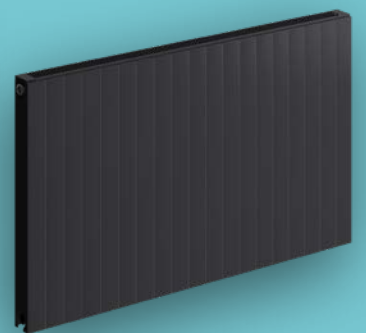

VITA COMPACT



All our Vita Series premium panel radiators have the same lugs and brackets plus all the same easy installation features that make them the UK's no.1 choice.

VITA DECO VERTICAL CONCEPT

VITA PLAN VERTICAL CONCEPT

VITA COMPACT VERTICAL

VITA DECO VERTICAL

VITA PLAN VERTICAL

UPGRADE TO A VITA DECO VERTICAL

UPGRADE TO A VITA PLAN VERTICAL





Compact
200 K3

VITA COMPACT 200



50 Δ t
(75/65/20°C)



Height mm	Length mm	Sections	K3			K4		
			Stelrad UIN	Heat output Watts	Heat output Btu/hr	Stelrad UIN	Heat output Watts	Heat output Btu/hr
200	800	24	76203308	746	2545	76204408	970	3310
	1000	30	76203310	933	3183	76204410	1212	4135
	1200	36	76203312	1120	3821	76204412	1454	4961
	1400	42	76203314	1306	4456	76204414	1697	5790
	1600	48	76203316	1493	5094	76204416	1939	6616
	1800	54	76203318	1679	5729	76204418	2182	7445
	2000	60	76203320	1866	6367	76204420	2424	8271

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 82 should be applied.






VITA COMPACT


50Δt

(75/65/20°C)

K1



P+



K2



Height mm	Length mm	K1		P+			K2			
		Stelrad UIN	Heat output Watts	Btu/hr	Stelrad UIN	Heat output Watts	Btu/hr	Stelrad UIN	Heat output Watts	Btu/hr
300	500	76301105	247	843	-	-	-	76302205	491	1676
	1000	76301110	494	1686	-	-	-	76302210	982	3352
	1500	76301115	741	2528	-	-	-	76302215	1473	5027
	2000	76301120	988	3371	-	-	-	76302220	1964	6703
450	400	76451104	286	977	76452104	422	1440	76452204	548	1870
	500	76451105	358	1221	76452105	528	1801	76452205	686	2341
	600	76451106	430	1466	76452106	633	2161	76452206	823	2809
	700	76451107	501	1710	76452107	739	2522	76452207	960	3276
	800	76451108	573	1954	76452108	844	2882	76452208	1097	3744
	900	76451109	644	2199	76452109	950	3242	76452209	1234	4212
	1000	76451110	716	2443	76452110	1055	3601	76452210	1371	4679
	1100	76451111	788	2687	76452111	1161	3962	76452211	1508	5147
	1200	76451112	859	2932	76452112	1266	4321	76452212	1645	5614
	1400	76451114	1002	3420	76452114	1477	5041	76452214	1920	6550
	1600	76451116	1146	3909	76452116	1688	5761	76452216	2195	7488
	1800	76451118	1289	4397	76452118	1900	6485	76452218	2469	8423
	2000	76451120	1432	4886	-	-	-	76452220	2743	9359
	600	300	76601103	277	945	-	-	-	-	-
400		76601104	369	1260	76602104	538	1836	76602204	693	2365
500		76601105	462	1575	76602105	673	2297	76602205	866	2956
600		76601106	554	1890	76602106	807	2754	76602206	1039	3546
700		76601107	646	2204	76602107	942	3215	76602207	1212	4137
800		76601108	738	2519	76602108	1076	3672	76602208	1386	4730
900		76601109	831	2834	76602109	1211	4133	76602209	1559	5321
1000		76601110	923	3149	76602110	1345	4590	76602210	1732	5911
1100		76601111	1015	3464	76602111	1480	5051	76602211	1906	6502
1200		76601112	1108	3779	76602112	1615	5509	76602212	2078	7092
1400		76601114	1292	4409	76602114	1884	6427	76602214	2426	8277
1600		76601116	1477	5039	76602116	2153	7345	76602216	2772	9457
1800		76601118	1661	5669	76602118	2421	8260	76602218	3119	10642
2000		76601120	1846	6299	-	-	-	76602220	3465	11823
700	400	76701104	421	1436	-	-	-	76702204	784	2676
	500	76701105	526	1795	76702105	765	2610	76702205	981	3348
	600	76701106	631	2154	76702106	918	3132	76702206	1177	4017
	700	76701107	736	2513	76702107	1071	3654	76702207	1373	4686
	800	76701108	842	2872	76702108	1224	4176	76702208	1569	5355
	900	76701109	947	3230	76702109	1377	4698	76702209	1765	6024
	1000	76701110	1052	3589	76702110	1530	5220	76702210	1962	6693
	1100	76701111	1157	3948	-	-	-	76702211	2158	7362
	1200	76701112	1262	4307	-	-	-	76702212	2354	8031
	1400	76701114	1473	5025	-	-	-	76702214	2746	9369
	1600	76701116	1683	5743	-	-	-	76702216	3139	10710
	1800	76701118	1894	6461	-	-	-	76702218	3531	12048
	2000	76701120	2104	7179	-	-	-	76702220	3923	13387

Δt50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt40 or Δt30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.


For systems not operating at DeltaT 50 the correction factors table on page 82 should be applied.





VITA COMPACT K3

50 Δ t
(75/65/20°C)



Height mm	Length mm	Stelrad UIN	Watts	Heat output Btu/hr
300	1000	76303310	1349	4603
	2000	76303320	2698	9206
500	600	76503306	1234	4210
	700	76503307	1439	4910
	800	76503308	1645	5613
	900	76503309	1850	6312
	1000	76503310	2056	7015
	1100	76503311	2262	7718
	1200	76503312	2467	8417
	1400	76503314	2878	9820
	1600	76503316	3290	11225
	1800	76503318	3701	12628
	2000	76503320	4112	14030
	2400	76503324	4934	16835
600	400	76603304	956	3262
	500	76603305	1195	4077
	600	76603306	1433	4889
	700	76603307	1672	5705
	800	76603308	1911	6520
	900	76603309	2150	7336
	1000	76603310	2389	8151
	1100	76603311	2628	8967
	1200	76603312	2867	9782
	1400	76603314	3345	11413
	1600	76603316	3822	13041
	1800	76603318	4300	14072
2000	76603320	4778	16303	
2400	76603324	5734	19564	
700	500	76703305	1356	4627
	600	76703306	1627	5551
	700	76703307	1898	6476
	800	76703308	2170	7404
	900	76703309	2441	8329
	1000	76703310	2712	9253
	1100	76703311	2983	10178
	1200	76703312	3254	11103
	1400	76703314	3797	12955
	1600	76703316	4339	14805
	1800	76703318	4882	16657
	2000	76703320	5424	18507

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 82 should be applied.







VITA COMPACT 900

50 Δ t

(75/65/20°C)



Height mm	Length mm	Sections	Stelrad UIN	Heat output		Stelrad UIN	Heat output	
				Watts	Btu/hr		Watts	Btu/hr
900	400	12	76901104	544	1856	76902204	958	3269
	500	15	76901105	680	2320	76902205	1198	4088
	600	18	76901106	816	2784	76902206	1437	4903
	700	21	76901107	952	3248	76902207	1677	5722
	800	24	76901108	1088	3712	76902208	1916	6537
	900	27	76901109	1224	4176	76902209	2156	7356
	1000	30	76901110	1360	4640	76902210	2395	8172

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 82 should be applied.


Stelrad. Fit for the future.

Stelrad Radiators are ready for decarbonisation and have many radiators being specified more and more for renewable heating systems as the popularity of heat pumps rises in the UK and Ireland.

Radiators continue to provide the levels of heat required when correctly sized, and the extended K3 and vertical ranges, plus the new Compact 900 high models are ideal for adhering to the new Part L regulations, which dictate a maximum flow temperature of 55° in new buildings.

Stelrad's range of high output radiators are aesthetically designed to meet your installation, specification and contract needs, now and in the future.

Visit stelradprofessional.com for more information.

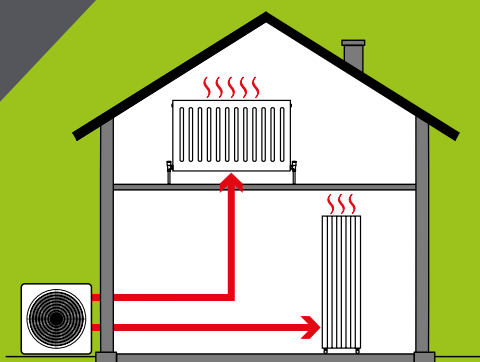

**FULLY COMPATIBLE
WITH NEW LOW
TEMPERATURE
HEATING SYSTEMS**

Find out more at
stelradprofessional.com/renewable-advice






VITA COMPACT 1200



50 Δ t
(75/65/20°C)



Height mm	Length mm	Sections	Stelrad UIN	Heat output	
				Watts	Btu/hr
1200	300	9	89122203	867	2958
	400	12	89122204	1156	3944
	500	15	89122205	1445	4931
	600	18	89122206	1733	5913
	700	21	89122207	2022	6899

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 82 should be applied.


Stelrad. Fit for the future.

Stelrad Radiators are ready for decarbonisation and have many radiators being specified more and more for renewable heating systems as the popularity of heat pumps rises in the UK and Ireland.

Radiators continue to provide the levels of heat required when correctly sized, and the extended K3 and vertical ranges, plus the new Compact 900 high models are ideal for adhering to the new Part L regulations, which dictate a maximum flow temperature of 55° in new buildings.

Stelrad's range of high output radiators are aesthetically designed to meet your installation, specification and contract needs, now and in the future.

Visit stelradprofessional.com for more information.

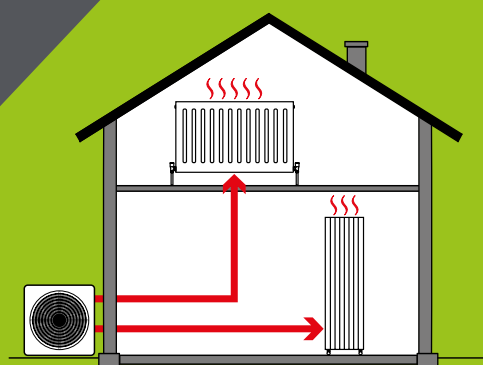

**FULLY COMPATIBLE
WITH NEW LOW
TEMPERATURE
HEATING SYSTEMS**


Find out more at
stelradprofessional.com/renewable-advice





VITA COMPACT VERTICAL

50 Δ t
(75/65/20°C)




Height mm	Length mm	Sections	Stelrad UIN	Heat output	
				Watts	Btu/h
1800	400	12	89121418	1584	5405
	500	15	89122518	1980	6756
	600	18	89122618	2376	8107

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 82 should be applied.



We recommend TRV Valves to complete the look. See page 85 for more information.



**Colour
radiators
in just
14 working
days!**




VITA SILHOUETTE

50Δt

(75/65/20°C)

K1



K2



Height mm	Length mm	White UIN	Colour UIN	Heat output Watts Btu/h		White UIN	Colour UIN	Heat output Watts Btu/h	
300	500	92301105	92301105c	235	802	92302205	92302205c	449	1532
	1000	92301110	92301110c	470	1604	92302210	92302210c	898	3064
	1500	92301115	92301115c	705	2405	92302215	92302215c	1347	4596
450	400	92451104	92451104c	272	928	92452204	92452204c	509	1737
	600	92451106	92451106c	409	1396	92452206	92452206c	764	2607
	700	92451107	92451107c	477	1628	92452207	92452207c	891	3040
	800	92451108	92451108c	545	1860	92452208	92452208c	1018	3473
	900	92451109	92451109c	613	2092	92452209	92452209c	1146	3910
	1000	92451110	92451110c	681	2,324	92452210	92452210c	1273	4343
	1100	92451111	92451111c	749	2556	92452211	92452211c	1400	4777
	1200	92451112	92451112c	817	2788	92452212	92452212c	1528	5214
	1400	92451114	92451114c	953	3252	92452214	92452214c	1782	6080
	1600	92451116	92451116c	1090	3719	92452216	92452216c	2037	6950
600	1800	92451118	92451118c	1226	4183	92452218	92452218c	2291	7817
	400	92601104	92601104c	348	1187	92602204	92602204c	640	2184
	600	92601106	92601106c	522	1781	92602206	92602206c	961	3279
	700	92601107	92601107c	609	2078	92602207	92602207c	1121	3825
	800	92601108	92601108c	696	2375	92602208	92602208c	1281	4371
	900	92601109	92601109c	783	2672	92602209	92602209c	1441	4917
	1000	92601110	92601110c	870	2968	92602210	92602210c	1601	5463
	1100	92601111	92601111c	957	3265	92602211	92602211c	1761	6009
	1200	92601112	92601112c	1044	3562	92602212	92602212c	1921	6554
	1400	92601114	92601114c	1218	4156	92602214	92602214c	2241	7646
	1600	92601116	92601116c	1392	4750	92602216	92602216c	2562	8742
	1800	92601118	92601118c	1566	5343	92602218	92602218c	2882	9833
2000	92601120	92601120c	1740	5937	92602220	92602220c	3202	10925	

Δt50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt40 or Δt30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 82 should be applied.

COLOUR OPTIONS

Comes in White as standard (RAL 9016). Please refer to page 86 for colour options.

Please note that once a coloured radiator has been ordered, it cannot be cancelled or returned.





VITA SILHOUETTE CONCEPT

50 Δ t
(75/65/20°C)

K1



K2



Height mm	Length mm	Stelrad UIN	Heat output		Stelrad UIN	Heat output	
			Watts	Btu/h		Watts	Btu/h
600	400	51601104	348	1187	51602204	640	2184
	600	51601106	522	1781	51602206	961	3279
	700	51601107	609	2078	51602207	1121	3825
	800	51601108	696	2375	51602208	1281	4371
	900	51601109	783	2672	51602209	1441	4917
	1000	51601110	870	2968	51602210	1601	5463
	1100	51601111	957	3265	51602211	1761	6009
	1200	51601112	1044	3562	51602212	1921	6554
	1400	51601114	1218	4156	51602214	2241	7646

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 82 should be applied.



**Colour
radiators
in just
14 working
days!**




VITA DECO

50Δt

(75/65/20°C)

K1



K2



Height mm	Length mm	White UIN	Colour UIN	Heat output Watts Btu/h		White UIN	Colour UIN	Heat output Watts Btu/h	
300	500	82301105	82301105c	235	802	82302205	82302205c	449	1532
	1000	82301110	82301110c	469	1601	82302210	82302210c	898	3064
	1500	82301115	82301115c	704	2401	82302215	82302215c	1347	4596
450	400	82451104	82451104c	272	928	82452204	82452204c	509	1737
	600	82451106	82451106c	409	1396	82452206	82452206c	764	2607
	700	82451107	82451107c	477	1628	82452207	82452207c	891	3040
	800	82451108	82451108c	545	1860	82452208	82452208c	1018	3474
	900	82451109	82451109c	613	2092	82452209	82452209c	1146	3910
	1000	82451110	82451110c	681	2324	82452210	82452210c	1273	4344
	1100	82451111	82451111c	749	2556	82452211	82452211c	1400	4779
	1200	82451112	82451112c	817	2788	82452212	82452212c	1528	5214
	1400	82451114	82451114c	953	3252	82452214	82452214c	1782	6080
	1600	82451116	82451116c	1090	3719	82452216	82452216c	2037	6951
600	1800	82451118	82451118c	1226	4183	82452218	82452218c	2291	7817
	400	82601104	82601104c	348	1188	82602204	82602204c	640	2184
	600	82601106	82601106c	522	1782	82602206	82602206c	961	3280
	700	82601107	82601107c	609	2078	82602207	82602207c	1121	3825
	800	82601108	82601108c	696	2375	82602208	82602208c	1281	4372
	900	82601109	82601109c	783	2672	82602209	82602209c	1441	4917
	1000	82601110	82601110c	870	2969	82602210	82602210c	1601	5464
	1100	82601111	82601111c	957	3265	82602211	82602211c	1761	6009
	1200	82601112	82601112c	1044	3563	82602212	82602212c	1921	6556
	1400	82601114	82601114c	1218	4157	82602214	82602214c	2242	7649
	1600	82601116	82601116c	1392	4751	82602216	82602216c	2563	8744
	1800	82601118	82601118c	1566	5345	82602218	82602218c	2883	9836
2000	82601120	82601120c	1740	5939	82602220	82602220c	3203	10928	

Δt50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt40 or Δt30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 82 should be applied.

See how a Stelrad Vita Deco is manufactured at stelradprofessional.com

COLOUR OPTIONS

Comes in White as standard (RAL 9016). Please refer to page 86 for colour options.


Please note that once a coloured radiator has been ordered, it cannot be cancelled or returned.





VITA DECO CONCEPT

50 Δ t
(75/65/20°C)



Height mm	Length mm	Stelrad UIN	Heat output		Stelrad UIN	Heat output	
			Watts	Btu/h		Watts	Btu/h
600	400	22601104	348	1187	22602204	640	2184
	600	22601106	522	1781	22602206	961	3279
	700	22601107	609	2078	22602207	1121	3825
	800	22601108	696	2375	22602208	1281	4371
	900	22601109	783	2672	22602209	1441	4917
	1000	22601110	870	2968	22602210	1601	5463
	1100	22601111	957	3265	22602211	1761	6009
	1200	22601112	1044	3562	22602212	1921	6554
	1400	22601114	1218	4156	22602214	2241	7646

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.


For systems not operating at DeltaT 50 the correction factors table on page 82 should be applied.





VITA DECO VERTICAL

50 Δ t
(75/65/20°C)




Height mm	Length mm	Sections	White	Colour	Heat output	
			UIN	UIN	Watts	Btu/h
1800	400	12	89222418	89222418c	1476	5036
	500	15	89222518	89222518c	1845	6295
	600	18	89222618	89222618c	2214	7554

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 82 should be applied.



We recommend TRV Valves to complete the look. See page 85 for more information.

COLOUR OPTIONS

Comes in White as standard (RAL 9016). Please refer to page 86 for colour options.


Please note that once a coloured radiator has been ordered, it cannot be cancelled or returned.





VITA DECO VERTICAL CONCEPT

50 Δ t
(75/65/20°C)




Height mm	Length mm	Sections	Stelrad UIN	Watts	Heat output Btu/h
1800	400	12	22182204	1476	5036
	500	15	22182205	1845	6295
	600	18	22182206	2214	7554

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 82 should be applied.



We recommend TRV Valves to complete the look. See page 85 for more information.





VITA PLAN

50 Δ t

(75/65/20°C)

K1



K2



Height mm	Length mm	White UIN	Colour UIN	Heat output Btu/h		White UIN	Colour UIN	Heat output Btu/h	
300	500	81301105	81301105c	235	802	81302205	81302205c	465	1587
	1000	81301110	81301110c	469	1601	81302210	81302210c	929	3171
	1500	81301115	81301115c	704	2401	81302215	81302215c	1394	4756
450	400	81451104	81451104c	280	955	81452204	81452204c	518	1767
	600	81451106	81451106c	421	1437	81452206	81452206c	778	2655
	800	81451108	81451108c	561	1914	81452208	81452208c	1037	3538
	1000	81451110	81451110c	701	2392	81452210	81452210c	1296	4422
	1200	81451112	81451112c	841	2870	81452212	81452212c	1555	5306
	1400	81451114	81451114c	981	3347	81452214	81452214c	1814	6190
	1600	81451116	81451116c	1122	3828	81452216	81452216c	2074	7077
	1800	81451118	81451118c	1262	4306	81452218	81452218c	2333	7961
600	400	81601104	81601104c	364	1242	81602204	81602204c	654	2231
	600	81601106	81601106c	547	1866	81602206	81602206c	980	3344
	800	81601108	81601108c	729	2487	81602208	81602208c	1307	4459
	1000	81601110	81601110c	911	3108	81602210	81602210c	1634	5575
	1200	81601112	81601112c	1093	3729	81602212	81602212c	1961	6691
	1400	81601114	81601114c	1275	4350	81602214	81602214c	2288	7807
	1600	81601116	81601116c	1458	4975	81602216	81602216c	2614	8919
	1800	81601118	81601118c	1640	5596	81602218	81602218c	2941	10035
	2000	81601120	81601120c	1822	6217	81602220	81602220c	3268	11150

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 82 should be applied.

COLOUR OPTIONS

Comes in White as standard (RAL 9016). Please refer to page 86 for colour options.


Please note that once a coloured radiator has been ordered, it cannot be cancelled or returned.





VITA PLAN CONCEPT

50 Δ t
(75/65/20°C)



Height mm	Length mm	Stelrad UIN	Heat output		Stelrad UIN	Heat output	
			Watts	Btu/h		Watts	Btu/h
600	400	21601104	364	1242	21602204	654	2231
	600	21601106	547	1866	21602206	980	3344
	800	21601108	729	2487	21602208	1307	4459
	1000	21601110	911	3108	21602210	1634	5575
	1200	21601112	1093	3729	21602212	1961	6691
	1400	21601114	1275	4350	21602214	2288	7807

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.


For systems not operating at DeltaT 50 the correction factors table on page 82 should be applied.





VITA PLAN VERTICAL

50 Δ t
(75/65/20°C)




Height mm	Length mm	Sections	White UIN	Colour UIN	Watts	Heat output Btu/h
1800	400	12	89322418	89322418c	1476	5036
	500	15	89322518	89322518c	1845	6295
	600	18	89322618	89322618c	2214	7554

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 82 should be applied.



We recommend TRV Valves to complete the look. See page 85 for more information.

COLOUR OPTIONS

Comes in White as standard (RAL 9016). Please refer to page 86 for colour options.


Please note that once a coloured radiator has been ordered, it cannot be cancelled or returned.





VITA PLAN VERTICAL CONCEPT

50 Δ t
(75/65/20°C)




Height mm	Length mm	Sections	Stelrad UIN	Heat output	
				Watts	Btu/h
1800	400	12	21182204	1476	5036
	500	15	21182205	1845	6295
	600	18	21182206	2214	7554

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 82 should be applied.



We recommend TRV Valves to complete the look. See page 85 for more information.





A5002
Ultramarine
blue



VITA ULTRA

50 Δ t

(75/65/20°C)

P+

K2



Front Panel Height mm	Emitter Height mm	Front Panel Length mm	Emitter Length mm	Stelrad UIN	Heat output Watts	Btu/h	Stelrad UIN	Heat output Watts	Btu/h
545	500	470	400	-	-	-	83512204	522	1781
		670	600	-	-	-	83512206	782	2668
		870	800	-	-	-	83512208	1043	3559
		1070	1000	-	-	-	83512210	1304	4449
		1270	1200	-	-	-	83512212	1565	5340
		1470	1400	-	-	-	83512214	1826	6231
		1670	1600	-	-	-	83512216	2086	7118
		1870	1800	-	-	-	83512218	2347	8008
		2070	2000	-	-	-	83512220	2608	8899
645	600	470	400	83612104	474	1616	83612204	599	2044
		670	600	83612106	710	2423	83612206	899	3068
		870	800	83612108	947	3231	83612208	1198	4088
		1070	1000	83612110	1184	4039	83612210	1498	5111
		1270	1200	83612112	1421	4847	83612212	1798	6135
		1470	1400	83612114	1658	5655	83612214	2097	7155
		1670	1600	83612116	1894	6462	83612216	2397	8179
		1870	1800	83612118	2131	7270	83612218	2696	9199
		2070	2000	83612120	2368	8078	83612220	2996	10223

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 82 should be applied.

COLOUR OPTIONS

Comes in White as standard (RAL 9016). Please refer to page 89 for colour options.

All colour radiators have up to an 14 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

For more information on colour radiator prices please contact your local merchant.


VITA ULTRA TOWEL RAIL BAR

Fits emitter length	Stelrad UIN
400mm wide	83100004
600mm wide	83100006
800mm wide	83100008
1000mm wide	83100010

Towel rail bar is 120mm wider than actual radiator.

Maximum of one towel rail bar per radiator.

For more information visit stelradprofessional.com

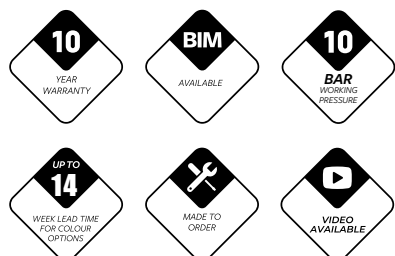

AN ADDITIONAL TOWEL RAIL BAR CAN BE ADDED AS AN OPTIONAL EXTRA



A2003
Pastel
orange



VITA COLUMN HORIZONTAL

50 Δ t

(75/65/20°C)

2 COLUMN

Height mm	Length mm	White UIN	Colour UIN	Heat output Watts	Heat output Btu/h
500	628	463012	463012c	499	1703
	858	463013	463013c	691	2358
	1042	463014	463014c	845	2884
	1272	463015	463015c	1037	3539
600	628	463028	463028c	589	2010
	858	463029	463029c	815	2782
	1042	463030	463030c	997	3403
	1272	463031	463031c	1223	4174

3 COLUMN

4 COLUMN

Height mm	Length mm	White UIN	Colour UIN	Heat output		Length mm	White UIN	Colour UIN	Heat output	
				Watts	Btu/hr				Watts	Btu/hr
300	444	463000	463000c	288	983	444	463007	463007c	377	1287
	628	463001	463001c	416	1420	628	463008	463008c	545	1860
	858	463002	463002c	576	1966	858	463009	463009c	754	2573
	1042	463003	463003c	704	2403	1042	463010	463010c	922	3147
	1272	463004	463004c	864	2949	1272	463011	463011c	1131	3860
	1456	463005	463005c	992	3386	-	-	-	-	-
500	1870	463006	463006c	1280	4369	-	-	-	-	-
	444	463016	463016c	464	1584	444	463023	463023c	608	2075
	628	463017	463017c	671	2290	628	463024	463024c	879	3000
	858	463018	463018c	929	3171	858	463025	463025c	1217	4154
	1042	463019	463019c	1135	3874	1042	463026	463026c	1487	5075
	1272	463020	463020c	1393	4754	1272	463027	463027c	1825	6229
600	1456	463021	463021c	1600	5461	-	-	-	-	-
	1870	463022	463022c	2064	7044	-	-	-	-	-
	444	463032	463032c	548	1870	444	463039	463039c	718	2451
	628	463033	463033c	792	2703	628	463040	463040c	1037	3539
	858	463034	463034c	1096	3741	858	463041	463041c	1436	4901
	1042	463035	463035c	1340	4573	1042	463042	463042c	1756	5993
750	1272	463036	463036c	1644	5611	1272	463043	463043c	2155	7355
	1456	463037	463037c	1888	6444	-	-	-	-	-
	1870	463038	463038c	2436	8314	-	-	-	-	-
	444	-	-	-	-	444	463049	463049c	877	2993
	628	-	-	-	-	628	463050	463050c	1266	4321
	858	463044	463044c	1337	4563	858	463051	463051c	1753	5983
1042	463045	463045c	1635	5580	1042	463052	463052c	2143	7314	
1272	463046	463046c	2006	6846	1272	463053	463053c	2630	8976	
1456	463047	463047c	2303	7860	1456	-	-	-	-	
1870	463048	463048c	2972	10143	1870	-	-	-	-	

Δt_{50} is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt_{40} or Δt_{30} output (see your installer or system designer or download from stelradprofessional.com).

Due to production tolerances, the length of the product and therefore the tap centres could contain a variation of +/- 1.5% of the overall stated length.

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 82 should be applied.

COLOUR OPTIONS

Comes in White as standard (RAL 9016). Please refer to page 86 for colour options.

Please note that once a coloured radiator has been ordered, it cannot be cancelled or returned.



VITA COLUMN CONCEPT

50 Δ t

(75/65/20°C)

3 COLUMN

Height mm	Length mm	Elements	Stelrad UIN	Watts	Heat output Btu/hr
600	628	13	463133	792	2703
	858	18	463134	1096	3741
	1042	22	463135	1340	4573
	1272	27	463136	1644	5611

4 COLUMN

Height mm	Length mm	Elements	Stelrad UIN	Watts	Heat output Btu/hr
600	628	13	463140	1037	3539
	858	18	463141	1436	4901
	1042	22	463142	1756	5993
	1272	27	463143	2155	7355

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

Due to production tolerances, the length of the product and therefore the tap centres could contain a variation of +/- 1.5% of the overall stated length.

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 82 should be applied.

Floor mounting brackets are available, for more information see page 84.





Natural Cast

COLOUR OPTIONS



Aged Gold



Anthracite Black



Bright Gold



Bronze



Copper



Natural Cast



Old Penny



Old Pewter



Pewter



Sovereign Gold

OPTIONAL VALVES



Antique Brass
Stelrad UIN: 263060



Brushed Nickel
Stelrad UIN: 263061

The thermostatic radiator valve comes with an in-built temperature sensor which maintains the room at the temperature you have selected.

CAST IRON COLUMN

50Δt

(75/65/20°C)

4 COLUMN

6 COLUMN

Height mm	Length mm	Sections	Stelrad UIN	Heat output Watts	Btu/h	Weight (kg)	Stelrad UIN	Heat output Watts	Btu/h	Weight (kg)
360	512	8	264073	378	1291	28	-	-	-	-
	573	9	264074	426	1452	31	-	-	-	-
	634	10	264075	473	1614	34	-	-	-	-
	695	11	264076	520	1775	38	-	-	-	-
	756	12	264077	568	1937	41	-	-	-	-
	816	13	264078	615	2098	45	-	-	-	-
	877	14	264079	662	2259	48	-	-	-	-
	938	15	264080	710	2421	52	-	-	-	-
	999	16	264081	757	2582	55	-	-	-	-
	1060	17	264082	804	2744	59	-	-	-	-
505	1120	18	264083	851	2905	62	-	-	-	-
	1181	19	264084	899	3066	65	-	-	-	-
	512	8	264085	538	1834	34	264037	772	2634	67
	573	9	264086	605	2064	38	264038	869	2963	75
	634	10	264087	672	2293	42	264039	965	3293	84
	695	11	264088	739	2522	46	264040	1062	3622	92
	756	12	264089	806	2751	50	264041	1158	3951	100
	816	13	264090	874	2981	55	264042	1255	4280	109
	877	14	264091	941	3210	59	264043	1351	4610	117
	938	15	264092	1008	3439	63	264044	1448	4939	125
660	999	16	264093	1075	3669	67	264045	1544	5268	134
	1060	17	264094	1142	3898	71	264046	1641	5597	142
	1120	18	264095	1210	4127	75	264047	1737	5927	150
	1181	19	264096	1277	4356	80	264048	1834	6256	159
	512	8	264001	706	2410	44	264049	1012	3453	77
	573	9	264002	795	2712	50	264050	1139	3885	86
	634	10	264003	883	3013	56	264051	1265	4316	96
	695	11	264004	971	3314	61	264052	1392	4748	105
	756	12	264005	1060	3615	67	264053	1518	5179	115
	816	13	264006	1148	3917	72	264054	1645	5611	125
760	877	14	264007	1236	4218	78	264055	1771	6043	134
	938	15	264008	1325	4519	83	264056	1898	6474	144
	999	16	264009	1413	4820	89	264057	2024	6906	153
	1060	17	264010	1501	5122	94	264058	2151	7338	163
	1120	18	264011	1589	5423	100	264059	2277	7769	173
	1181	19	264012	1678	5724	106	264060	2404	8201	182
	512	8	264013	852	2907	50	-	-	-	-
	573	9	264014	959	3270	56	-	-	-	-
	634	10	264015	1065	3634	62	-	-	-	-
	695	11	264016	1172	3997	68	-	-	-	-
960	756	12	264017	1278	4361	75	-	-	-	-
	816	13	264018	1385	4724	81	-	-	-	-
	877	14	264019	1491	5087	87	-	-	-	-
	938	15	264020	1598	5451	93	-	-	-	-
	999	16	264021	1704	5814	100	-	-	-	-
	1060	17	264022	1811	6177	106	-	-	-	-
	1120	18	264023	1917	6541	112	-	-	-	-
	1181	19	264024	2024	6904	118	-	-	-	-
	512	8	264025	1019	3478	63	264061	1459	4979	98
	573	9	264026	1147	3912	71	264062	1642	5601	111
960	634	10	264027	1274	4347	79	264063	1824	6223	123
	695	11	264028	1401	4782	86	264064	2006	6846	135
	756	12	264029	1529	5216	94	264065	2189	7468	147
	816	13	264030	1656	5651	102	264066	2371	8091	160
	877	14	264031	1784	6086	110	264067	2554	8713	172
	938	15	264032	1911	6520	118	264068	2736	9335	184
	999	16	264033	2038	6955	126	264069	2918	9958	196
	1060	17	264034	2166	7390	133	264070	3101	10580	209
	1120	18	264035	2293	7824	141	264071	3283	11202	221
	1181	19	264036	2421	8259	149	264072	3466	11825	233

Δt50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt40 or Δt30 output (see your installer or system designer or download from stelradprofessional.com).

Due to production tolerances, the length of the product and therefore the tap centres could contain a variation of +/- 1.5% of the overall stated length.

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 82 should be applied.



Colour radiators in just 14 working days!



VITA COLUMN VERTICAL

50 Δ t

(75/65/20°C)

2 COLUMN

Height mm	Length mm	Elements	White UIN	Colour UIN	Watts	Heat output Btu/hr
1800	352	9	463054	463054c	868	2962
	444	9	463055	463055c	1116	3809
2000	352	9	463056	463056c	966	3297
	444	9	463057	463057c	1242	4239
2500	352	9	463058	463058c	1197	4085
	444	9	463059	463059c	1539	5253

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

Due to production tolerances, the length of the product and therefore the tap centres could contain a variation of +/- 1.5% of the overall stated length.

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 82 should be applied.

COLOUR OPTIONS

Comes in White as standard (RAL 9016). Please refer to page 86 for colour options.

Please note that once a coloured radiator has been ordered, it cannot be cancelled or returned.





VITA COLUMN VERTICAL CONCEPT

50 Δ t

(75/65/20°C)

2 COLUMN

Height mm	Length mm	Elements	Columns	Stelrad UIN	Heat output Watts	Heat output Btu/hr
1800	444	9	2	463155	1116	3809
2000	444	9	2	463157	1242	4239

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

Due to production tolerances, the length of the product and therefore the tap centres could contain a variation of +/- 1.5% of the overall stated length.

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 82 should be applied.





VITA CONCORD PLANE

50 Δ t

(75/65/20°C)

SINGLE



DOUBLE



Height mm	Length mm	Elements	White UIN	Colour UIN	Heat output Watts Btu/hr		White UIN	Colour UIN	Heat output Watts Btu/hr	
444	500	6	448346	448346c	392	1338	448397	448397c	678	2313
	600	6	448347	448347c	470	1604	448398	448398c	814	2777
	700	6	448348	448348c	549	1873	448399	448399c	949	3238
	800	6	448349	448349c	627	2139	448400	448400c	1085	3702
	900	6	448350	448350c	706	2409	448401	448401c	1220	4163
	1000	6	448351	448351c	784	2675	448402	448402c	1356	4627
	1100	6	448352	448352c	862	2941	448403	448403c	1492	5091
	1200	6	448353	448353c	941	3211	448404	448404c	1627	5552
1400	6	448354	448354c	1098	3747	448405	448405c	1898	6476	
592	500	8	448363	448363c	501	1709	448414	448414c	849	2897
	600	8	448364	448364c	601	2051	448415	448415c	1018	3474
	700	8	448365	448365c	701	2392	448416	448416c	1188	4054
	800	8	448366	448366c	802	2737	448417	448417c	1358	4634
	900	8	448367	448367c	902	3078	448418	448418c	1527	5210
	1000	8	448368	448368c	1002	3419	448419	448419c	1697	5790
	1100	8	448369	448369c	1102	3760	448420	448420c	1867	6370
	1200	8	448370	448370c	1202	4101	448421	448421c	2036	6947
1400	8	448371	448371c	1403	4787	448422	448422c	2376	8107	

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 82 should be applied.

COLOUR OPTIONS

Comes in White as standard (RAL 9016). Please refer to page 86 for colour options.

Please note that once a coloured radiator has been ordered, it cannot be cancelled or returned.






VITA CONCORD VERTICAL

50 Δ t

(75/65/20°C)

SINGLE



Height mm	Length mm	Elements	White UIN	Colour UIN	Watts	Heat output Btu/hr
1800	444	6	448340	448340c	852	2907
	592	8	448341	448341c	1136	3876
	740	10	448342	448342c	1420	4845
2000	444	6	448343	448343c	942	3214
	592	8	448344	448344c	1256	4286
	740	10	448345	448345c	1570	5357

DOUBLE



Height mm	Length mm	Elements	White UIN	Colour UIN	Watts	Heat output Btu/hr
1800	444	6	448640	448640c	1254	4279
	592	8	448641	448641c	1672	5705
	740	10	448642	448642c	2090	7131
2000	444	6	448643	448643c	1386	4729
	592	8	448644	448644c	1848	6306
	740	10	448645	448645c	2310	7882

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 82 should be applied.

COLOUR OPTIONS

Comes in White as standard (RAL 9016). Please refer to page 86 for colour options.

Please note that once a coloured radiator has been ordered, it cannot be cancelled or returned.





VITA CONCORD VERTICAL CONCEPT

50 Δ t
(75/65/20°C)

SINGLE



Height mm	Length mm	Stelrad UIN	Heat output	
			Watts	Btu/hr
1800	444	448652	852	2907
	592	448653	1136	3876
	740	448654	1420	4845

DOUBLE



Height mm	Length mm	Stelrad UIN	Heat output	
			Watts	Btu/hr
1800	444	448655	1254	4279
	592	448656	1672	5705
	740	448657	2090	7131

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 82 should be applied.



Colour radiators in just 14 working days!



VITA CONCORD SLIMLINE

50 Δ t
(75/65/20°C)

SINGLE



Height mm	Length mm	Elements	White UIN	Colour UIN	Heat output	
					Watts	Btu/hr
1800	320	8	448300	448300c	872	2975
	440	11	448301	448301c	1199	4091
	520	13	448302	448302c	1417	4835
	640	16	448303	448303c	1744	5951
2000	320	8	448304	448304c	976	3330
	440	11	448305	448305c	1342	4579
	520	13	448306	448306c	1586	5412
	640	16	448307	448307c	1952	6661

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 82 should be applied.

COLOUR OPTIONS

Comes in White as standard (RAL 9016). Please refer to page 86 for colour options.

Please note that once a coloured radiator has been ordered, it cannot be cancelled or returned.





VITA CONCORD SLIMLINE CONCEPT

50 Δ t
(75/65/20°C)

SINGLE



Height mm	Length mm	Elements	Stelrad UIN	Heat output	
				Watts	Btu/hr
1800	320	8	448658	872	2975
	440	11	448659	1199	4091
	520	13	448660	1417	4835
	640	16	448661	1744	5951

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 82 should be applied.



**Colour
radiators
in just
14 working
days!**



Straight
Chrome

CLASSIC TOWEL RAIL

50Δt

(75/65/20°C)

Height mm	Length mm	Max Projection mm	STRAIGHT				STRAIGHT CHROME			
			White UIN	Colour UIN	Heat output Watts	Heat output Btu/hr	Stelrad UIN	Heat output Watts	Heat output Btu/hr	
760	500	100	148070	148070c	376	1282	147002	246	839	
	600	100	148071	148071c	445	1517	147003	294	1003	
1211	500	100	148072	148072c	576	1964	147004	379	1292	
	600	100	148073	148073c	686	2339	147005	453	1545	
1744	500	100	148074	148074c	844	2878	142768	557	1899	
	600	100	148075	148075c	1000	3410	142769	667	2274	

Height mm	Length mm	Max Projection mm	CURVED				CURVED CHROME			
			White UIN	Colour UIN	Heat output Watts	Heat output Btu/hr	Stelrad UIN	Heat output Watts	Heat output Btu/hr	
760	500	100	147006	147006c	376	1282	147012	246	839	
	600	100	147007	147007c	445	1517	147013	294	1003	
1211	500	100	147008	147008c	576	1964	147014	379	1292	
	600	100	147009	147009c	686	2339	147015	453	1545	
1744	500	100	147010	147010c	844	2878	147016	557	1899	
	600	100	147011	147011c	1000	3410	147017	667	2274	

Δt50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt40 or Δt30 output (see your installer or system designer or download from stelradprofessional.com).

CLASSIC MINI TOWEL RAIL

50Δt

(75/65/20°C)


Height mm	Length mm	Max Projection mm	STRAIGHT				STRAIGHT CHROME			
			White UIN	Colour UIN	Heat output Watts	Heat output Btu/hr	Stelrad UIN	Heat output Watts	Heat output Btu/hr	
678	400	100	147000	147000c	273	931	147001	175	597	

Δt50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt40 or Δt30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 82 should be applied.

HORIZONTAL TUBE DIMENSION

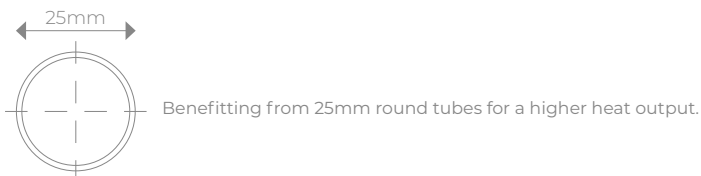

COLOUR OPTIONS



Comes in White (RAL 9016) or Chrome as standard. Please refer to page 86 for colour options.

Please note that once a coloured radiator has been ordered, it cannot be cancelled or returned.

For more information on colour radiator prices please contact your local merchant.





Polished
steel

STAINLESS STEEL TOWEL RAIL

50 Δ t

(75/65/20°C)

POLISHED STEEL

Height mm	Length mm	Stelrad UIN	Watts	Heat output Btu/hr
750	500	741001	190	648
	600	741003	340	1160
1200	500	741002	299	1020
1500	500	741004	370	1262

BRUSHED STEEL


Height mm	Length mm	Stelrad UIN	Watts	Heat output Btu/hr
750	500	742001	190	648
	600	742003	340	1160
1200	500	742002	299	1020
1500	500	742004	370	1262

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at Delta T 50 the correction factors table on page 82 should be applied.

HORIZONTAL TUBE DIMENSION





Colour radiators in just 14 working days!

**RAL 3002
Carmine red**

CALIENTE RAIL

50 Δ t

(75/65/20°C)

STRAIGHT SINGLE

Height mm	Lengths mm	White UIN	Colour UIN	Watts	Heat output Btu/hr
755	450	407501450	407501450c	389	1327
	500	407501500	407501500c	431	1471
	600	407501600	407501600c	517	1764
	750	407501750	407501750c	645	2201
1199	450	401101450	401101450c	615	2098
	500	401101500	401101500c	675	2303
	600	401101600	401101600c	794	2709
	750	401101750	401101750c	972	3316
1791	450	401701450	401701450c	900	3071
	500	401701500	401701500c	986	3364
	600	401701600	401701600c	1158	3951
	750	401701750	401701750c	1416	4831
2013	450	402001450	402001450c	1002	3419
	500	402001500	402001500c	1099	3750
	600	402001600	402001600c	1294	4415
	750	402001750	402001750c	1586	5411


STRAIGHT DOUBLE

Height mm	Lengths mm	White UIN	Colour UIN	Watts	Heat output Btu/hr
755	450	407502450	407502450c	565	1928
	500	407502500	407502500c	626	2136
	600	407502600	407502600c	749	2556
	750	407502750	407502750c	934	3187
1199	450	401102450	401102450c	868	2962
	500	401102500	401102500c	963	3286
	600	401102600	401102600c	1154	3937
	750	401102750	401102750c	1441	4917
1791	450	401702450	401702450c	1268	4326
	500	401702500	401702500c	1402	4784
	600	401702600	401702600c	1670	5698
	750	401702750	401702750c	2073	7073
2013	450	402002450	402002450c	1427	4869
	500	402002500	402002500c	1576	5377
	600	402002600	402002600c	1874	6394
	750	402002750	402002750c	2321	7919

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).


For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 82 should be applied.



We recommend TRV Valves to complete the look. See page 85 for more information.

HORIZONTAL TUBE DIMENSION



Benefitting from 22mm round tubes for a higher heat output.

COLOUR OPTIONS



Comes in White as standard (RAL 9016). Please refer to page 86 for colour options.

Please note that once a coloured radiator has been ordered, it cannot be cancelled or returned.

Brackets are colour matched for White, Anthracite and Black rails; all other colours come with Chrome brackets.





RAL 7032
Pebble
grey

CONCORD RAIL

50Δt

(75/65/20°C)


STRAIGHT SINGLE

Height mm	Length mm	Tap centres	White UIN	Colour UIN	Heat output Watts Btu/hr	
731	450	400	148581	148581c	342	1167
	600	550	148582	148582c	447	1525
1186	450	400	148583	148583c	530	1808
	600	550	148584	148584c	694	2368
1511	450	400	148585	148585c	666	2272
	600	550	148586	148586c	869	2965
1771	450	400	148587	148587c	777	2651
	600	550	148588	148588c	1010	3446

Δt50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt40 or Δt30 output (see your installer or system designer or download from stelradprofessional.com).


For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 82 should be applied.



We recommend TRV Valves to complete the look. See page 85 for more information.

HORIZONTAL TUBE DIMENSION



COLOUR OPTIONS

Comes in White as standard (RAL 9016). Please refer to page 86 for colour options.

Please note that once a coloured radiator has been ordered, it cannot be cancelled or returned.





50 Δ t

(75/65/20°C)

STRAIGHT


Height mm	Length mm	Stelrad UIN	Watts	Heat output Btu/hr
750	500	720001	247	843
1000	500	720002	306	1044
1200	500	720003	341	1164
1500	500	720004	421	1437

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 82 should be applied.

HORIZONTAL TUBE DIMENSION





CONCORD SIDE CHROME

50 Δ t

(75/65/20°C)


STRAIGHT

Height mm	Length mm	Stelrad UIN	Watts	Heat output Btu/hr
830	500	712001	221	754
1130	500	712002	297	1013
1430	500	712003	371	1266
1730	500	712004	448	1529

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).



For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 82 should be applied.



We recommend TRV Valves to complete the look. See page 85 for more information.

HORIZONTAL TUBE DIMENSION





CONCORD SIDE CONCEPT

50 Δ t

(75/65/20°C)


STRAIGHT

Height mm	Length mm	Stelrad UIN	Watts	Heat output Btu/hr
830	500	711001	374	1276
1130	500	711002	483	1648
1430	500	711003	602	2054

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).


For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.


For systems not operating at DeltaT 50 the correction factors table on page 82 should be applied.



We recommend TRV Valves to complete the look. See page 85 for more information.

HORIZONTAL TUBE DIMENSION



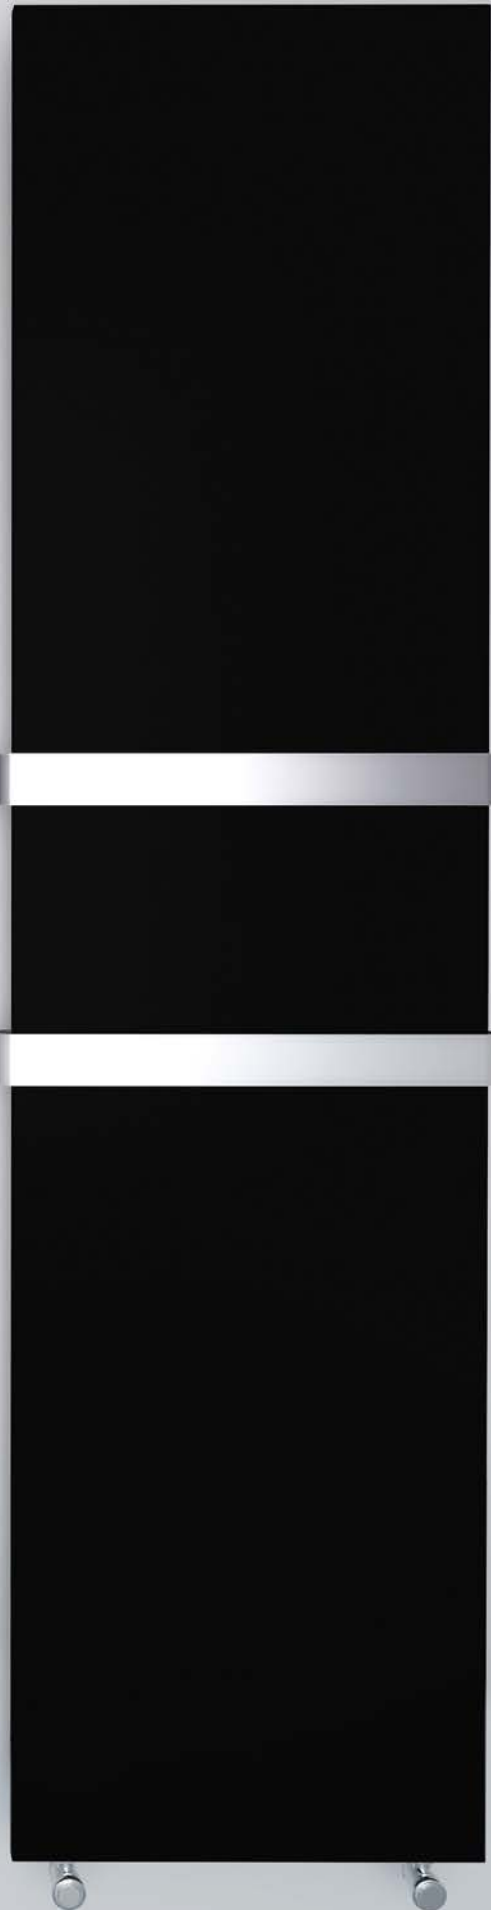


NL170
Graphite
black

VERTICAL ULTRA

50 Δ t

(75/65/20°C)

K2




Front Panel Height mm	Emitter Height mm	Front Panel Length mm	Emitter Length mm	Stelrad UIN	Heat output Watts	Heat output Btu/hr
1040	1000	470	400	86110224	857	2924
		570	500	86110225	1071	3654
		670	600	86110226	1285	4384
1240	1200	470	400	86112224	999	3409
		570	500	86112225	1249	4262
		670	600	86112226	1499	5115
1840	1800	470	400	86118224	1476	5036
		570	500	86118225	1845	6295
		670	600	86118226	2214	7554
2040	2000	470	400	86120224	1584	5405
		570	500	86120225	1980	6756
		670	600	86120226	2376	8107

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 82 should be applied.



ADDITIONAL TOWEL RAIL BAR(S) CAN BE ADDED AS AN OPTIONAL EXTRA

VERTICAL ULTRA TOWEL RAIL BAR

Fits emitter length	Stelrad UIN	Radiator Height	Max no. of bars
400mm wide	83200004	1000	1
500mm wide	83200005	1200	2
600mm wide	83200006	1800	3
		2000	3

Towel rail bar is 120mm wider than actual radiator.
Maximum three towel rail bars per radiator.

For more information visit stelradprofessional.com

COLOUR OPTIONS

Please refer to page 89 for colour options.

All colour radiators have up to a 14 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

NB: When choosing a colour only the front fascia panel can be coloured. Where the product is 1000mm and 1200mm, the emitter, top grille and side panels are black. Where the product is 1800mm and 2000mm, the emitter, top grille and side panels are white.



EXCLUSIVE TO
STELRAD GROUP PLC



LECCO

50 Δ t

(75/65/20°C)

STRAIGHT


Height mm	Length mm	Stelrad UIN	Watts	Heat output Btu/hr
1200	500	730001	200	682

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 82 should be applied.

HORIZONTAL TUBE DIMENSION





CONCORD CHROME VERTICAL

50 Δ t

(75/65/20°C)

SINGLE

Height mm	Length mm	Stelrad UIN	Watts	Heat output Btu/hr
1800	310	751101	395	1348
	390	751102	495	1688
	470	751103	528	1801
	604	751104	654	2232

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 82 should be applied.



ADDITIONAL INFORMATION

EXTRA PERFORMANCE TO GUARANTEED STANDARDS

Stelrad combine the most sophisticated production resources in Europe with substantial investment in testing and verification of performance data - which has helped us create high output radiators delivering heating performance that exceeds expectation.

MORE CHOICE FOR APPLICATION FLEXIBILITY

A range of models provides extra sizing flexibility and covers a multitude of application requirements, including those where there are installation difficulties or where wall space is at a premium.

SUPERB QUALITY FROM DESIGN TO INSTALLATION

Our radiators are specifically designed to minimise any movement, providing a tight, professional fit that will remain in place, even after storage, transit and installation. Convectors are precision welded directly onto the waterways for greater efficiency and economy, with flexible connection options for the highest of commercial and domestic application specifications.

Stelrad radiators are manufactured under ISO 9001 quality systems in the UK and every one comes wrapped in robust, practical packaging that will keep the product pristine, right through to installation. This clever packaging design allows installation to be completed prior to removal.

TEMPERATURE TABLE

For systems not operating at Δt_{50} the factors in the table below should be applied. The output of a given radiator can be obtained by multiplying the quoted Δt_{50} output by the operating factor. Conversely, to derive a non Δt_{50} output, divide the heat output required by the relevant operation factor. This ' Δt_{50} equivalent output' can then be used to select a radiator from the standard tables.

Δt	$^{\circ}\text{C}$ Operating Factor
20	0.304
25	0.406
30	0.515
35	0.629
40	0.748
45	0.872
50	1.000
55	1.132
60	1.267
65	1.406

The corrections factors are calculated using an average n-coefficient of 1.3

COMPUTER GENERATED IMAGES (CGI)

CGIs are for illustration purposes only.

BRANDED STICKER



Please note, all premium panel radiators have a Stelrad branded sticker on the front panel.

WARRANTY LIMITATIONS

Standard steel panel products, which are installed in toilets or any areas of high humidity (including bathrooms, kitchens and shower rooms, etc.) are limited to a twelve month parts and labour warranty.

APPLICATIONS

Stelrad radiators are suitable for two pipe installations. For single pipe applications, it is advisable to use diversion tees in the pipework, as this will assist in obtaining design performance from the radiators. Although our radiators are suitable for Microbore pipework, the back tappings make them unsuitable for twin entry valves.

INSTALLATION

Everything required for installation can be found within each radiator's packaging. Brackets are of a strong design, with open top and deep slots, which facilitate easy and secure installation. Plastic inserts seat the radiator precisely on the bracket minimising expansion and contraction noise.

The neat nickel-plated plug and vent provide a watertight joint, whilst complementing the superior finish.

To facilitate easy one off replacement, nickel-plated brass extension pieces are also available, complete with sealing washer, in 20mm, 30mm and 40mm options. Recommended height from the floor to the base of the radiator is 150mm minimum. This allows adequate airflow when the radiator is placed on the bracket.

CAUTION

When designing for domestic systems we recommend that the Stelrad radiators are only used in heating systems complying with British Standard Code of Practice for Central Heating for Domestic Premises BS EN 12828:2012 and BS EN12831-1:2017.

Single feed, direct cylinders are not recommended as should interchange of water occur, fresh aerated water would enter the heating system, resulting in corrosion.

WATER TREATMENT

On completion of the installation, the system should be properly flushed and filled in accordance with the British Standard Code of Practice BS7593:2019 for the Treatment of Water in Domestic Hot Water Central Heating Systems, Part L of Building Regulations and Good Practice Guidance for Scotland.

After installation of a new Stelrad radiator the central heating system should be cleaned and flushed with cleaner to remove existing contaminants, flux residue and other installation debris which, if left, can cause damage to the new radiator.

Afterwards, treat the system with an inhibitor to ensure long term protection against corrosion and limescale.

A comprehensive range of quality chemicals including inhibitors, cleaners, leak sealers and noise reducers that protect and maintain central heating systems can be obtained from:

Sentinel Performance Solutions Ltd

7650 Daresbury Park,
Warrington,
Cheshire,
WA4 4BS
www.sentinelprotects.com

Fernox

Unit 2 Genesis Business Park,
Albert Drive,
Sheerwater,
Woking,
Surrey,
GU21 5RW
www.fernox.com

TWO COAT PAINT PROCESS

Each Stelrad radiator is subjected to a multi stage cleaning process before the paint is applied. This involves several rinsing stages, including an iron phosphate and demineralisation rinse.

The first coat of paint is applied by electrophoresis and the radiator is then stoved and cooled. The second powder coat is applied and the radiator goes through a final curing stage. It is then allowed to cool, prior to packaging.

HEAT LOSS CALCULATORS

The Stelrad Basic & Advanced Heatloss Programme contains an inbuilt U value calculator.

Save time and effort by using the Stelrad heat loss calculators - the perfect solution for accurate sizing and design flexibility.

Basic: stelradprofessional.com/basic-heat-loss-calculator/

Advanced: stelradprofessional.com/starsapp/

For further information and advice call 0800 876 6813.

DELIVERY INFORMATION (FOR CAST IRON COLUMN ONLY)

Please note: Due to the weight of the product a 2-man lift is required and there is a £84 incl. VAT shipping charge per order, per destination for orders under £1200 incl. VAT.

The delivery driver is only able to stop at the closest point on the road at the nearest accessible external hard standing, i.e. pavement.

Due to health and safety legislation the driver is prohibited from lifting any heavy goods (25kg = max. single person lift). They are not insured to enter the property. It is your responsibility to organise the manpower thereafter to be available to move your radiators to a suitable and dry storage area.

Cast Iron Column radiators are delivered individually wrapped with each individual radiator layer separated with a thick card then secured flat onto the pallet(s).

Cast Iron Column radiators have up to a 14 day lead time.

Returning Costs: To return a Cast Iron Column radiator(s) there is a restock charge of £42 per radiator (inclusive of VAT) and a carrier charge of £84 (inclusive of VAT). If there are more than five radiators being returned the carrier charge may increase, this will be discussed when you make your return request to Stelrad.

ACCESSORIES

BLANKING PLUG



½" Blanking Plug

UIN 140072

Available for all products.

EXTENSION PIECES



Optional extension pieces for easy replacement.

20mm UIN 9176
30mm UIN 9177
40mm UIN 9178

Available for all the products in the Vita Series.

¾" VALVE ADAPTOR




Optional ¾" valve adapter for connection without performance reduction.

UIN 140117

Available for all the products in the Vita Series.

TOWEL RAIL ELECTRIC HEATER ELEMENT



Electric heating element

150 watt UIN 141536
300 watt UIN 141531
615 watt UIN 141532

Available for the Classic Towel Rail, Caliente Rail & Concord Rail.

VITA ULTRA TOWEL RAIL BAR



400mm wide UIN 83100004
600mm wide UIN 83100006
800mm wide UIN 83100008
1000mm wide UIN 83100010

Available for the Vita Ultra only.
Maximum one bar.

VERTICAL ULTRA TOWEL RAIL BAR



400mm UIN 83200004
500mm UIN 83200005
600mm UIN 83200006

Available for the Vertical Ultra only.
Maximum three bars per Vertical.

FLOOR MOUNTING BRACKETS



300mm UIN 9179
450mm UIN 9180
500mm UIN 9197
600mm UIN 9181
700mm UIN 9182
(sold single)

Available for Vita Compact, Vita Silhouette, Vita Deco & Vita Plan.

Recommend to use 3 on products that are 1800mm or longer.

Applicable for P1, K1 & K2 radiators.

For additional information on alternative floor mounting brackets, please call 0800 876 6813.

COLUMN FLOOR MOUNTING BRACKETS

(sold in pairs)



UIN 148137 White

UIN 148138 Anthracite Grey

UIN 148137c Coloured

OPTIONAL TRVS



Brushed Nickel

Antique Brass

Antique Brass UIN 263060

Brushed Nickel UIN 263061

FULL HEIGHT & ANTI-LIFT BRACKETS



300mm wide UIN 9191
 400mm wide UIN 9192
 450mm wide UIN 9193
 500mm wide UIN 9194
 600mm wide UIN 9195
 700mm wide UIN 9196

Full height and anti-lift brackets are available for a secure fixing in commercial applications.

Available for all horizontal panel radiators within the Vita Series.

PACKAGING & FIXINGS



Robust packaging protects the product right through to hand over. Installation instructions can be found on the reverse of the identification label.

Example packaging above, the packaging for each radiator will vary.

Available for Compact and panel radiators.

All fixing requirements are complete within the packaging. Content will vary depending on product.

Air Vent & Blanking Plug




Brackets

Saddle Strips

Branded Clips

CENTRE TAP TRV



Available for the Vita Compact Vertical, Vita Deco Vertical, Vita Deco Vertical Concept, Vita Plan Vertical, Vita Plan Vertical Concept, Caliente Rail,* Concord Rail,* Concord Side Chrome,* Concord Side Concept* and Vertical Ultra.

*Angled Right Centre Tap TRVs only available for towel rails.

UIN	Elements
14531310	CENTRE TAP TRV STRAIGHT WHITE -10MM
14531312	CENTRE TAP TRV STRAIGHT WHITE -1/2IN
14531315	CENTRE TAP TRV STRAIGHT WHITE -15MM
14531410	CENTRE TAP TRV STRAIGHT CHROME -10MM
14531412	CENTRE TAP TRV STRAIGHT CHROME -1/2IN
14531415	CENTRE TAP TRV STRAIGHT CHROME -15MM
14531510	CENTRE TAP TRV ANGLED L WHITE -10MM
14531512	CENTRE TAP TRV ANGLED L WHITE -1/2IN
14531515	CENTRE TAP TRV ANGLED L WHITE -15MM
14531610	CENTRE TAP TRV ANGLED L CHROME -10MM
14531612	CENTRE TAP TRV ANGLED L CHROME -1/2IN
14531615	CENTRE TAP TRV ANGLED L CHROME -15MM
14531710	CENTRE TAP TRV ANGLED R WHITE -10MM*
14531712	CENTRE TAP TRV ANGLED R WHITE -1/2IN*
14531715	CENTRE TAP TRV ANGLED R WHITE -15MM*
14531810	CENTRE TAP TRV ANGLED R CHROME -10MM*
14531812	CENTRE TAP TRV ANGLED R CHROME -1/2IN*
14531815	CENTRE TAP TRV ANGLED R CHROME -15MM*

COLOUR GUIDE

55 COLOUR OPTIONS. 14-DAY LEAD TIME.

Stelrad Radiators are available in white (RAL 9016) as standard, however the specific radiators identified below are **now available in a variety of colours within 14 working days.**


STANDARD COLOUR



RAL 9016
Traffic white

PRODUCTS - Vita Silhouette, Vita Deco, Vita Plan Vita Column, Vita Concord, Classic Towel Rail, Caliente Rail and Concord Rail ranges

RAL COLOURS - Satin Finish



1001
Beige



1013
Oyster white



1015
Light ivory



9001
Cream



9002
Grey white



9003
Signal white



9010
Pure white



9016
Traffic white




9018
Papyrus white




9005
Jet black



9017
Traffic black




7001
Silver grey



7011
Iron grey



7015
Slate grey



7016
Anthracite grey




7030
Stone grey




7032
Pebble grey



7035
Light grey




7036
Platinum grey



7037
Dusty grey



7038
Agate grey




7039
Quartz grey




5002
Ultramarine blue



5010
Gentian blue




5012
Light blue



5014
Pigeon blue



5015
Sky blue




5022
Night blue

Please note: When a coloured radiator or radiators have been ordered they cannot be cancelled or returned.



RAL COLOURS (continued)




5024
Pastel blue



6005
Light moss green



6018
Yellow green



6019
Pastel green




6020
Chrome green



6027
Light green



6033
Mint turquoise



6034
Pastel turquoise



3000
Flame red



3002
Carmine red



3003
Ruby red



3005
Wine red



2003
Pastel orange



2008
Bright red orange



1004
Golden yellow




1016
Sulphur yellow



1021
Colza yellow




3015
Light pink



8014
Sepia




8017
Chocolate brown




7026
Granite



1019
Cappuccino




8028
Terra brown



9011
Graphite black


METALLIC



1247M
Bronze metallic



7001M
Silver metallic




9007M
Grey metallic

 **Stelrad**[®]


INSTALLER LOYALTY CLUB

EARN REWARDS

How it works

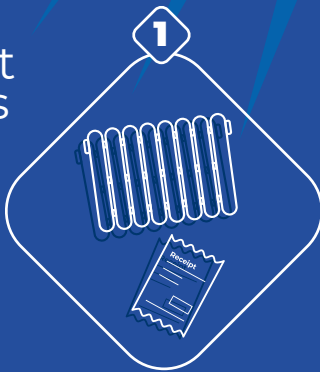

Purchase any Stelrad radiator* and upload an image of your receipt or invoice to your account.

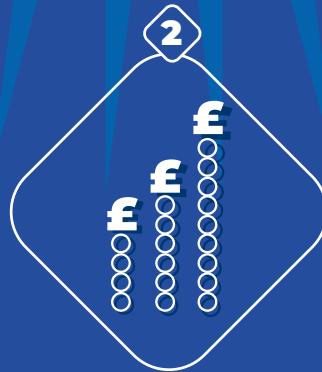

Earn points.



Get rewards.

 **Stelrad**[®]

[Stelrad.com/LoyaltyClub](https://www.stelrad.com/LoyaltyClub)

*Terms and conditions apply, Stelrad Premium Softline Series, Premium Vita Series, Designer or Towel Rails only. Visit the website for full details.

COLOUR GUIDE

PRODUCTS - Vita Ultra, Vertical Ultra*

Please note: these radiators have up to a 14 week lead time


NATURAL COLOURS




NT110
Papyrus white



NT120
Pearl white



NT130
Champagne




NT140
Beige



NT160
Pebble grey



SN110
Cream white



NT170
Quartz grey




SN120
Cream




SN130
Mocca




SN140
Bordeaux



SN150
Sepia




SN160
Pale blue




SN170
Black


METALLIC COLOURS



ML110
Dove grey




ML120
Titanium grey




ML140
Granite



ML150
Cappuccino



ML160
Terra brown



ML170
Graphite black

RAL COLOURS




A1004
Golden yellow



A2003
Pastel orange




A3002
Carmine red




A5002
Ultramarine blue




A6018
Yellow green




A7001
Silver grey



A7011
Iron grey



A7016
Anthracite grey



A7030
Stone grey



A7035
Light grey



A8017
Chocolate brown



A9003
Signal white




A9005
Jet black

To request up to 5 colour samples, please email sales@stelradprofessional.com or call **0800 876 6813** with your choices and address details.

The colours shown are reproduced as accurately as this printing process will allow.

For further information on RAL colours please visit www.ralcolorchart.com



RAL 9016
Traffic white comes as standard on all radiators.



Stelrad Radiators are available in white (RAL 9016) as standard, however the specific radiators identified are now available in a variety of colours. The colours shown are reproduced as accurately as this process will allow and can be made to order on the identified products.

All colour radiators have up to an 8 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

To request a colour chart please email sales@stelradprofessional.com

*Please note: When choosing a colour only the front fascia panel can be coloured. Where the product height is 1000mm and 1200mm, the emitter, top grille and side panels are black. If the product height is 1800mm and 2000mm, the emitter, top grille and side panels are white.

GLOSSARY

BIID	The British Institute of Interior Design is a professional organisation for commercial and residential interior designers in Britain.
BSP	British Standard Piping.
Btu/hr	British Thermal Unit per hour is the standard measurement used to state the amount of output of any heat generating device.
CETIAT tested	A leading independent French laboratory which conducts testing and assessments.
CIBSE	The Chartered Institution of Building Services Engineers is the prime source of expertise in the Building Services industry.
Δt	Refers to the difference in temperature between the water circulating in the central heating system and that of the ambient temperature. It is important to use the correct Δt when selecting your radiators, as the same radiator will have different outputs at different water temperatures.
Δt_{50}	Δt_{50} is the UK standard, however Stelrad also quote at lower levels for lower water temperature systems.
 EN 442	EN 442 is the European standard which defines the manufacturing standards for radiators and convectors which operate at temperatures of less than 120°C. The standard defines the type of steel which must be used, the type of pressure testing which must be carried out and the accuracy of the heat outputs quoted in the literature.
Heat loss	Is the amount of heat a room loses, it is therefore an important calculation when determining what size radiator is required to heat a room to the correct level.
ISO14001	Is a set of International regulations related to the environment.
ISO45001	Is a set of International regulations related to health and safety.
ISO9001	Is a set of International regulations related to quality management systems.
ISO50001	Is a set of International regulations related to energy management systems.
K1	Also known as Type 11, is a type of radiator with 1 radiator panel and 1 set of convection fins.
K2	Also known as Type 22, is a type of radiator with 2 radiator panels and 2 sets of convection fins.
K3	Also known as Type 33, is a type of radiator with 3 radiator panels and 3 sets of convection fins.
K4	Also known as Type 44, is a type of radiator with 4 radiator panels and 4 sets of convection fins.
 marc	MARC - the Manufacturers' Association of Radiators and Convectors.
P+	Also known as Type 21, is a type of radiator with 2 radiator panels and 1 set of convection fins.
P1	Also known as Type 10, is a type of radiator with 1 radiator panel and no convection fins.
P2	Also known as Type 20, is a type of radiator with 2 radiator panels and no convection fins.
RAL	A European wide colour matching system.
TBOE / BOE	Refers to which position the pipes are connected to the radiator, OE means opposite end i.e. 1 pipe on each side, TB is top bottom i.e. 1 pipe is connected to the top and 1 to the bottom, B is both pipes connected to the bottom.
UIN	Is the unique identification number for Stelrad products.
Warranty	The warranty covers any defect that is attributable to a manufacturing, assembly or material fault. Further details available on request.
Watts	Is another measurement for heat output.

ICON KEY



5 year warranty that covers any defect that is attributable to a manufacturing, assembly or material fault. Further details available on request.



10 year warranty that covers any defect that is attributable to a manufacturing, assembly or material fault. Further details available on request.



All radiators with this logo are made to order. Made to order radiators cannot be cancelled or returned once ordered.



Building Information Modelling. Visit stelradprofessional.com to download BIM components.



Identified colour radiators have up to a 14 week lead time.



The maximum working pressure is the limit at which the system can operate. Different designs and types of construction requires different gauges of steel in order achieve the desired working pressure.



The maximum working pressure is the limit at which the system can operate. Different designs and types of construction requires different gauges of steel in order achieve the desired working pressure.



The maximum working pressure is the limit at which the system can operate. Different designs and types of construction requires different gauges of steel in order achieve the desired working pressure.



This product comes with a Zinc coating to provide additional protection to help the radiators retain their appearance and prevent corrosion.



Concord Plane, Concord Lo-Line and Concord Vertical are manufactured using 1.25mm thick steel.



Concord Slimline radiators are manufactured using 1.5mm thick steel.



Video available - visit stelradprofessional.com



Fully recyclable products and packaging.



An independently verified Environmental Product Declaration, based on a life cycle assessment (LCA) and compliant with ISO 14025 and EN 15804 standards.

CORPORATE SOCIAL RESPONSIBILITY (CSR)

Stelrad recognises that its success is built on integrating business values and operations to meet the expectations of stakeholders. Stelrad's social, economic and environmental responsibilities are to these stakeholders, which are demonstrated throughout its business practices, policies and achievements. Stelrad are committed to Integrated Management Systems for control of Quality, Health and Safety and Environment, which are certificated to BSI OHSAS / ISO standards.

Wherever possible, Stelrad sources renewable and recyclable materials. 100% of all metal and other raw materials throughout the manufacturing process are recycled.

A full CSR policy document is available on request.



Accreditations



Memberships



Follow us on



Stelrad Limited, Stelrad House, Marriott Road
Mexborough, South Yorkshire, S64 8BN

stelradprofessional.com
Telephone: 0800 876 6813

UIN 208901
VS/5k/0126



The Cover Laminate Film is made with 30% raw material obtained from chemically recycled post-consumer plastic waste.