



SOFTLINE

SERIES

JANUARY 2026



KEEPING YOU WARM
SINCE 1936

THE SOFTLINE SERIES

THE CURVED COLLECTION

SOFTLINE
DECO VERTICAL




SOFTLINE COMPACT




SOFTLINE
COLUMN
HORIZONTAL



SOFTLINE
CONCORD
VERTICAL

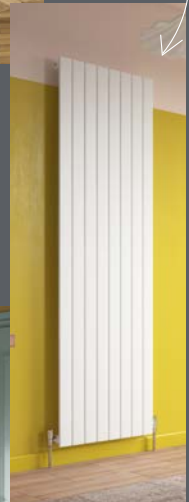

SOFTLINE
SILHOUETTE
CONCEPT

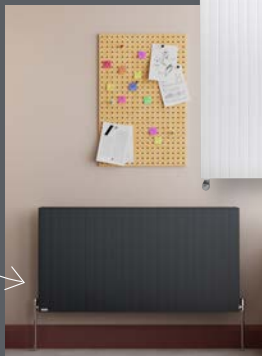

SOFTLINE COLUMN
CONCEPT



SOFTLINE CONCORD
VERTICAL CONCEPT




SOFTLINE PLAN

Curved top grille and end panels



SOFTLINE COLUMN
HORIZONTAL

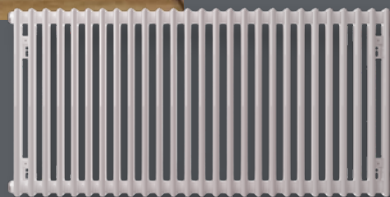

The Curved Collection consisting of beautifully curved top grilles and side panels on all our designer panel radiators.

LEADING THE WAY

Stelrad has been manufacturing high quality, steel radiators since 1936, so it's safe to say we know a thing or two about heating.

Since our beginnings, we've grown into the UK's number one radiator brand, manufacturing and distributing over 2.5 million radiators and products every year. With an expert research facility in Belgium, we're dedicated to continually developing innovative products and widening our extensive range to enable you to offer your customers the largest selection of technically-advanced radiator styles and sizes in the UK.

THINGS TO CONSIDER

Innovation, development and customer service are at the heart of everything we do, and we offer ranges of radiators to suit your every need. Safety, designer style, kitchens, bathrooms - a huge choice, many available in 55 colours to match your taste and decor.

Ordering is easy, and you can download simple fitting instructions and guides from our website.

So when you're thinking about radiators, there's just one name to consider... Stelrad.

PRODUCT RANGES

Discover our range of designer radiators, expertly designed and styled to suit every taste and interior.

You can choose from a range of shapes, sizes, colours and finishes.



COLOURS

These days you are not limited to a traditional white radiator, you have the freedom to choose the most suitable colour radiator which will complement the colour scheme of your room.



FITTING

Plumbers and installers are at the heart of everything we do. Our definitive range of products offer a solution for every project and requirement. View our helpful range of downloadable installation documents and videos at stelradprofessional.com

QUOTE SERVICE

Our nationwide Specification and Quotes Teams are on hand to discuss your requirements for your project. Contact our expert Quotes Team for a personalised quote on 01709 527211 or email stelrad.quotes@stelrad.com

ORDERING

If you would like to order a product, please visit stelradprofessional.com to find your nearest stocking branch.




INSTALLER LOYALTY CLUB

EARN REWARDS


How it works

1



Purchase any Stelrad radiator* and upload an image of your receipt or invoice to your account.

2



Earn points.

3



Get rewards.



[Stelrad.com/Loyalty](https://www.stelrad.com/Loyalty)

*Terms and conditions apply, Stelrad Premium Softline Series, Premium Vita Series, Designer or Towel Rails only. Visit the website for full details.



OPEN UP A WORLD OF COLOUR



Softline Column Horizontal
RAL 6033 Mint turquoise

Order in one of the 55 standard
RAL colours and finishes.

Applicable for the Softline Silhouette, Deco, Plan,
Column, Concord, Caliente Rail, Concord Rail and
Classic Towel Rail ranges.

stelradprofessional.com



SOFTLINE

SERIES

The Softline Series consists of beautifully curved top grilles and side panels on all our horizontal designer panel radiators.





New

Curved top grille and side panels



Softline Compact	10
Softline Compact K3	12
Softline Compact 900	14
Softline Compact 1200	16
Softline Compact Vertical	18
Softline Silhouette	20
Softline Silhouette Concept	22
Softline Deco	24
Softline Deco Concept	26
Softline Deco Vertical	28
Softline Deco Vertical Concept	30
Softline Plan	32
Softline Plan Concept	34
Softline Plan Vertical	36
Softline Plan Vertical Concept	38
Softline Column Horizontal	40
Softline Column Concept	42
Cast Iron Column	44
Softline Column Vertical	46
Softline Column Vertical Concept	48
Softline Concord Plane	50
Softline Concord Vertical	52
Softline Concord Vertical Concept	54
Softline Concord Slimline	56
Softline Concord Slimline Concept	58
Classic Towel Rail	60
Stainless Steel Towel Rail	62
Caliente Rail	64
Concord Rail	66
Como	68
Concord Side Chrome	70
Concord Side Concept	72
Vertical Ultra	74
Lecco	76
Concord Chrome Vertical	78
Additional information and accessories	80-85

WHY NOT UPGRADE?

**UPGRADE TO A
SOFTLINE PLAN**



SOFTLINE PLAN




SOFTLINE PLAN CONCEPT

**UPGRADE TO A
SOFTLINE DECO**



SOFTLINE DECO

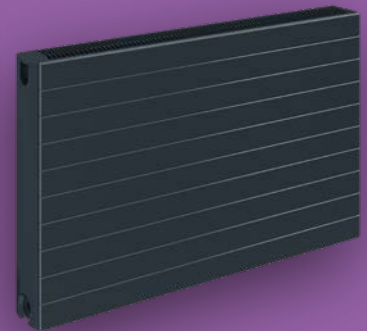


SOFTLINE DECO CONCEPT

**UPGRADE TO A
SOFTLINE
SILHOUETTE**



SOFTLINE SILHOUETTE

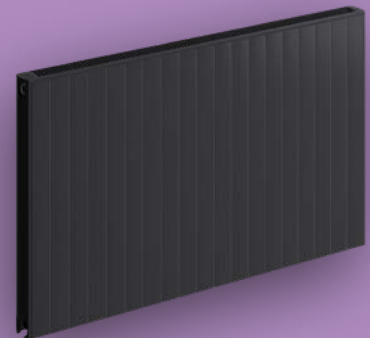

SOFTLINE SILHOUETTE CONCEPT



SOFTLINE COMPACT

All our Softline Series premium panel radiators have the same lugs and brackets plus all the same easy installation features that make them the UK's no.1 choice.

The image displays three vertical radiator models against a purple background. The first model on the left is the Softline Compact Vertical, a white radiator with vertical ridges. The middle section shows the Softline Deco Vertical Concept, featuring a white radiator with vertical ridges and a black radiator with vertical ridges. The right section shows the Softline Plan Vertical Concept, featuring a white radiator with a smooth surface and a black radiator with a smooth surface.

SOFTLINE COMPACT VERTICAL


SOFTLINE DECO VERTICAL CONCEPT

SOFTLINE PLAN VERTICAL CONCEPT

SOFTLINE COMPACT VERTICAL

SOFTLINE DECO VERTICAL

SOFTLINE PLAN VERTICAL



**UPGRADE TO A
SOFTLINE
DECO VERTICAL** 

**UPGRADE TO A
SOFTLINE
PLAN VERTICAL** 



SOFTLINE COMPACT

50Δt
(75/65/20°C)



Height mm	Length mm	Stelrad UIN	Heat output Watts Btu/hr		Stelrad UIN	Heat output Watts Btu/hr		Stelrad UIN	Heat output Watts Btu/hr	
300	500	80301105	255	870	-	-	-	80302205	491	1676
	1000	80301110	509	1737	-	-	-	80302210	982	3352
	1500	80301115	764	2608	-	-	-	80302215	1473	5027
	2000	80301120	1018	3474	-	-	-	80302220	1964	6703
450	400	80451104	302	1031	-	-	-	80452204	548	1870
	500	80451105	378	1290	-	-	-	80452205	686	2341
	600	80451106	454	1550	-	-	-	80452206	823	2809
	700	80451107	529	1805	-	-	-	80452207	960	3276
	800	80451108	605	2065	-	-	-	80452208	1097	3744
	900	80451109	680	2321	-	-	-	80452209	1234	4212
	1000	80451110	756	2580	80452110	1055	3601	80452210	1371	4679
	1100	80451111	832	2840	80452111	1161	3962	80452211	1508	5147
	1200	80451112	907	3096	80452112	1266	4321	80452212	1645	5614
	1400	80451114	1058	3611	80452114	1477	5041	80452214	1919	6550
	1600	80451116	1210	4130	80452116	1688	5761	80452216	2194	7488
	1800	80451118	1361	4645	-	-	-	80452218	2468	8423
2000	80451120	1512	5160	-	-	-	80452220	2742	9358	
600	400	80601104	392	1338	80602104	538	1836	80602204	693	2365
	500	80601105	490	1672	80602105	673	2297	80602205	866	2956
	600	80601106	588	2007	80602106	807	2754	80602206	1039	3546
	700	80601107	686	2341	80602107	942	3215	80602207	1212	4137
	800	80601108	784	2676	80602108	1076	3672	80602208	1386	4730
	900	80601109	882	3010	80602109	1211	4133	80602209	1559	5321
	1000	80601110	980	3345	80602110	1345	4590	80602210	1732	5911
	1100	80601111	1078	3679	80602111	1480	5051	80602211	1905	6502
	1200	80601112	1176	4014	80602112	1614	5509	80602212	2078	7092
	1400	80601114	1372	4683	80602114	1883	6427	80602214	2425	8277
	1600	80601116	1568	5352	80602116	2152	7345	80602216	2771	9457
	1800	80601118	1764	6021	-	-	-	80602218	3118	10642
2000	80601120	1960	6689	-	-	-	80602220	3464	11823	
700	400	80701104	447	1526	-	-	-	80702204	784	2676
	500	80701105	559	1908	-	-	-	80702205	981	3348
	600	80701106	670	2287	-	-	-	80702206	1177	4017
	700	80701107	782	2669	-	-	-	80702207	1373	4686
	800	80701108	894	3051	-	-	-	80702208	1569	5355
	900	80701109	1005	3430	-	-	-	80702209	1765	6024
	1000	80701110	1117	3812	-	-	-	80702210	1961	6693
	1100	80701111	1229	4195	-	-	-	80702211	2157	7362
	1200	80701112	1340	4573	-	-	-	80702212	2353	8031
	1400	80701114	1564	5338	-	-	-	80702214	2745	9369
	1600	80701116	1787	6099	-	-	-	80702216	3138	10710
	1800	80701118	2011	6864	-	-	-	80702218	3530	12048
2000	80701120	2234	7625	-	-	-	80702220	3922	13386	

At50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt40 or Δt30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.


For systems not operating at DeltaT 50 the correction factors table on page 80 should be applied.





SOFTLINE COMPACT K3

50 Δ t
(75/65/20°C)



Height mm	Length mm	Sections	Stelrad UIN	Heat output	
				Watts	Btu/hr
600	400	12	80603304	956	3262
	500	15	80603305	1195	4077
	600	18	80603306	1433	4889
	700	21	80603307	1672	5705
	800	24	80603308	1911	6520
	900	27	80603309	2150	7336
	1000	30	80603310	2389	8151
	1100	33	80603311	2628	8967
	1200	36	80603312	2867	9782
	1400	42	80603314	3345	11413

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.


For systems not operating at DeltaT 50 the correction factors table on page 80 should be applied.





SOFTLINE COMPACT 900

50 Δ t
(75/65/20°C)



Height mm	Length mm	Sections	Stelrad UIN	Heat output		Stelrad UIN	Heat output	
				Watts	Btu/hr		Watts	Btu/hr
900	400	12	80901104	544	1856	80902204	958	3269
	500	15	80901105	680	2320	80902205	1198	4088
	600	18	80901106	816	2784	80902206	1437	4903
	700	21	80901107	952	3248	80902207	1677	5722
	800	24	80901108	1088	3712	80902208	1916	6537
	900	27	80901109	1224	4176	80902209	2156	7356
	1000	30	80901110	1360	4640	80902210	2395	8172

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 80 should be applied.


Stelrad. Fit for the future.

Stelrad Radiators are ready for decarbonisation and have many radiators being specified more and more for renewable heating systems as the popularity of heat pumps rises in the UK and Ireland.

Radiators continue to provide the levels of heat required when correctly sized, and the extended K3 and vertical ranges, plus the new Compact 900 high models are ideal for adhering to the new Part L regulations, which dictate a maximum flow temperature of 55° in new buildings.

Stelrad's range of high output radiators are aesthetically designed to meet your installation, specification and contract needs, now and in the future.

Visit stelradprofessional.com for more information.

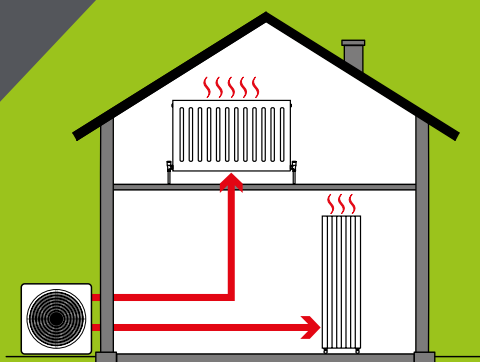


**FULLY COMPATIBLE
WITH NEW LOW
TEMPERATURE
HEATING SYSTEMS**

Find out more at
stelradprofessional.com/renewable-advice






SOFTLINE COMPACT 1200



50 Δ t
(75/65/20°C)



Height mm	Length mm	Sections	Stelrad UIN	Heat output	
				Watts	Btu/hr
1200	300	9	87122203	867	2958
	400	12	87122204	1156	3944
	500	15	87122205	1445	4931
	600	18	87122206	1733	5913
	700	21	87122207	2022	6899

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 80 should be applied.


Stelrad. Fit for the future.

Stelrad Radiators are ready for decarbonisation and have many radiators being specified more and more for renewable heating systems as the popularity of heat pumps rises in the UK and Ireland.

Radiators continue to provide the levels of heat required when correctly sized, and the extended K3 and vertical ranges, plus the new Compact 900 high models are ideal for adhering to the new Part L regulations, which dictate a maximum flow temperature of 55° in new buildings.

Stelrad's range of high output radiators are aesthetically designed to meet your installation, specification and contract needs, now and in the future.

Visit stelradprofessional.com for more information.

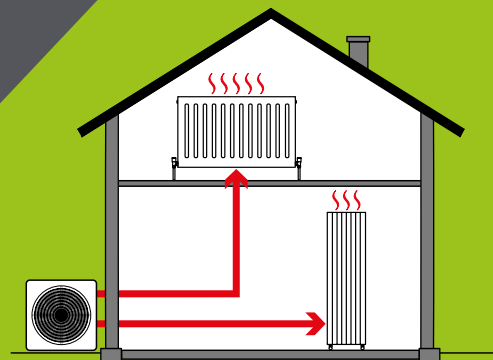

**FULLY COMPATIBLE
WITH NEW LOW
TEMPERATURE
HEATING SYSTEMS**


Find out more at
stelradprofessional.com/renewable-advice





SOFTLINE COMPACT VERTICAL

50 Δ t
(75/65/20°C)




Height mm	Length mm	Sections	Stelrad UIN	Heat output	
				Watts	Btu/h
1800	400	12	87122418	1584	5405
	500	15	87122518	1980	6756
	600	18	87122618	2376	8107

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 80 should be applied.



We recommend TRV Valves to complete the look. See page 84 for more information.





SOFTLINE SILHOUETTE

50 Δ t

(75/65/20°C)

K1



K2



Height mm	Length mm	K1				K2			
		White UIN	Colour UIN	Watts	Heat output Btu/hr	White UIN	Colour UIN	Watts	Heat output Btu/hr
300	500	88301105	88301105c	235	802	88302205	88302205c	449	1532
	1000	88301110	88301110c	470	1604	88302210	88302210c	898	3064
	1500	88301115	88301115c	705	2405	88302215	88302215c	1347	4596
450	400	88451104	88451104c	272	928	88452204	88452204c	509	1737
	600	88451106	88451106c	409	1396	88452206	88452206c	764	2607
	700	88451107	88451107c	477	1628	88452207	88452207c	891	3040
	800	88451108	88451108c	545	1860	88452208	88452208c	1018	3473
	900	88451109	88451109c	613	2092	88452209	88452209c	1146	3910
	1000	88451110	88451110c	681	2324	88452210	88452210c	1273	4343
	1100	88451111	88451111c	749	2556	88452211	88452211c	1400	4777
	1200	88451112	88451112c	817	2788	88452212	88452212c	1528	5214
	1400	88451114	88451114c	953	3252	88452214	88452214c	1782	6080
	1600	88451116	88451116c	1090	3719	88452216	88452216c	2037	6950
	1800	88451118	88451118c	1226	4183	88452218	88452218c	2291	7817
600	400	88601104	88601104c	348	1187	88602204	88602204c	640	2184
	600	88601106	88601106c	522	1781	88602206	88602206c	961	3279
	700	88601107	88601107c	609	2078	88602207	88602207c	1121	3825
	800	88601108	88601108c	696	2375	88602208	88602208c	1281	4371
	900	88601109	88601109c	783	2672	88602209	88602209c	1441	4917
	1000	88601110	88601110c	870	2968	88602210	88602210c	1601	5463
	1100	88601111	88601111c	957	3265	88602211	88602211c	1761	6009
	1200	88601112	88601112c	1044	3562	88602212	88602212c	1921	6554
	1400	88601114	88601114c	1218	4156	88602214	88602214c	2241	7646
	1600	88601116	88601116c	1392	4750	88602216	88602216c	2562	8742
	1800	88601118	88601118c	1566	5343	88602218	88602218c	2882	9833
2000	88601120	88601120c	1740	5937	88602220	88602220c	3202	10925	

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.


For systems not operating at DeltaT 50 the correction factors table on page 80 should be applied.

COLOUR OPTIONS

Comes in White as standard (RAL 9016). Please refer to page 82 for colour options.

Please note that once a coloured radiator has been ordered, it cannot be cancelled or returned.



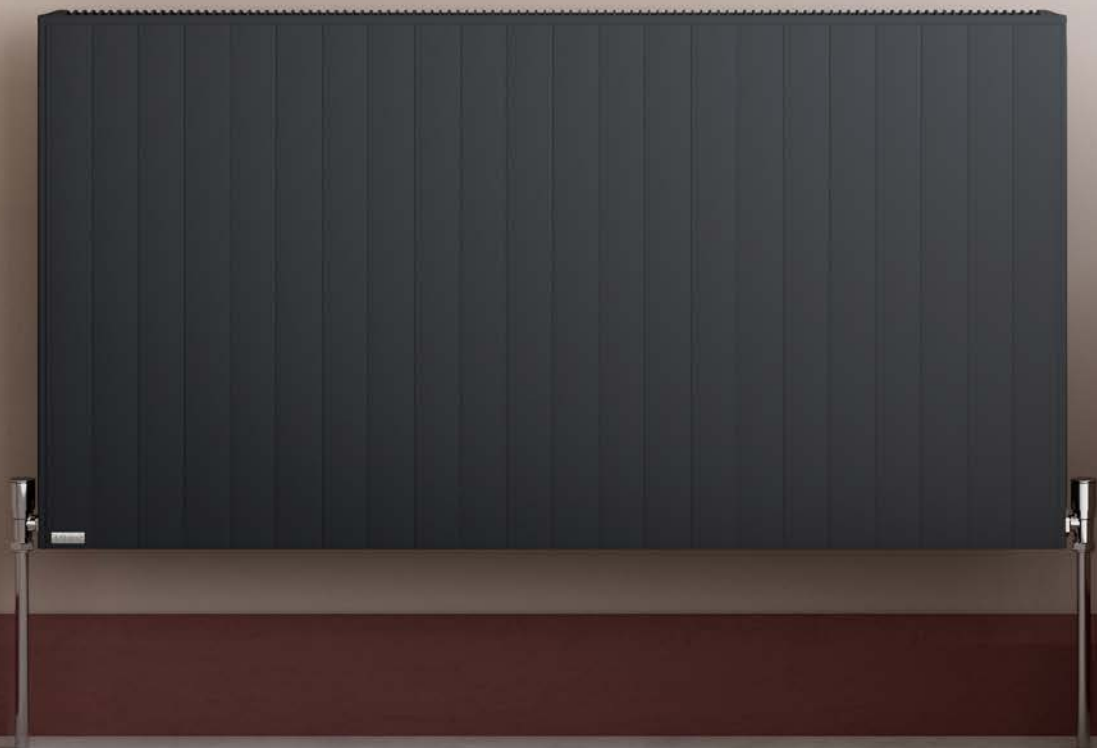

SOFTLINE SILHOUETTE CONCEPT

50 Δ t
(75/65/20°C)



Height mm	Length mm	Stelrad UIN	Heat output		Stelrad UIN	Heat output	
			Watts	Btu/hr		Watts	Btu/hr
600	400	52601104	348	1187	52602204	640	2184
	600	52601106	522	1781	52602206	961	3279
	700	52601107	609	2078	52602207	1121	3825
	800	52601108	696	2375	52602208	1281	4371
	900	52601109	783	2672	52602209	1441	4917
	1000	52601110	870	2968	52602210	1601	5463
	1100	52601111	957	3265	52602211	1761	6009
	1200	52601112	1044	3562	52602212	1921	6554
	1400	52601114	1218	4156	52602214	2241	7646

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 80 should be applied.



**Colour
radiators
in just
14 working
days!**



SOFTLINE DECO

50 Δ t

(75/65/20°C)

K1



K2



Height mm	Length mm	White UIN		Heat output		White UIN		Heat output	
		White UIN	Colour UIN	Watts	Btu/hr	White UIN	Colour UIN	Watts	Btu/hr
300	500	84301105	84301105c	235	802	84302205	84302205c	449	1532
	1000	84301110	84301110c	470	1604	84302210	84302210c	898	3064
	1500	84301115	84301115c	705	2405	84302215	84302215c	1347	4596
450	400	84451104	84451104c	272	928	84452204	84452204c	509	1737
	600	84451106	84451106c	409	1396	84452206	84452206c	764	2607
	700	84451107	84451107c	477	1628	84452207	84452207c	891	3040
	800	84451108	84451108c	545	1860	84452208	84452208c	1018	3473
	900	84451109	84451109c	613	2092	84452209	84452209c	1146	3910
	1000	84451110	84451110c	681	2324	84452210	84452210c	1273	4343
	1100	84451111	84451111c	749	2556	84452211	84452211c	1400	4777
	1200	84451112	84451112c	817	2788	84452212	84452212c	1528	5214
	1400	84451114	84451114c	953	3252	84452214	84452214c	1782	6080
	1600	84451116	84451116c	1090	3719	84452216	84452216c	2037	6950
	1800	84451118	84451118c	1226	4183	84452218	84452218c	2291	7817
600	400	84601104	84601104c	348	1187	84602204	84602204c	640	2184
	600	84601106	84601106c	522	1781	84602206	84602206c	961	3279
	700	84601107	84601107c	609	2078	84602207	84602207c	1121	3825
	800	84601108	84601108c	696	2375	84602208	84602208c	1281	4371
	900	84601109	84601109c	783	2672	84602209	84602209c	1441	4917
	1000	84601110	84601110c	870	2968	84602210	84602210c	1601	5463
	1100	84601111	84601111c	957	3265	84602211	84602211c	1761	6009
	1200	84601112	84601112c	1044	3562	84602212	84602212c	1921	6554
	1400	84601114	84601114c	1218	4156	84602214	84602214c	2241	7646
	1600	84601116	84601116c	1392	4750	84602216	84602216c	2562	8742
	1800	84601118	84601118c	1566	5343	84602218	84602218c	2882	9833
	2000	84601120	84601120c	1740	5937	84602220	84602220c	3202	10925

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 80 should be applied.

COLOUR OPTIONS

Comes in White as standard (RAL 9016). Please refer to page 82 for colour options.

Please note that once a coloured radiator has been ordered, it cannot be cancelled or returned.





SOFTLINE DECO CONCEPT

50 Δ t
(75/65/20°C)

K1



K2



Height mm	Length mm	Stelrad UIN	Heat output		Stelrad UIN	Heat output	
			Watts	Btu/hr		Watts	Btu/hr
600	400	24601104	348	1187	24602204	640	2184
	600	24601106	522	1781	24602206	961	3279
	700	24601107	609	2078	24602207	1121	3825
	800	24601108	696	2375	24602208	1281	4371
	900	24601109	783	2672	24602209	1441	4917
	1000	24601110	870	2968	24602210	1601	5463
	1100	24601111	957	3265	24602211	1761	6009
	1200	24601112	1044	3562	24602212	1921	6554
1400	24601114	1218	4156	24602214	2241	7646	

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 80 should be applied.



**Colour
radiators
in just
14 working
days!**



SOFTLINE DECO VERTICAL

50 Δ t

(75/65/20°C)

K2




Height mm	Length mm	Sections	White UIN	Colour UIN	Heat output Watts	Heat output Btu/h
1800	400	12	87222418	87222418c	1476	5036
	500	15	87222518	87222518c	1845	6295
	600	18	87222618	87222618c	2214	7554

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 80 should be applied.



We recommend TRV Valves to complete the look. See page 84 for more information.

COLOUR OPTIONS

Comes in White as standard (RAL 9016). Please refer to page 82 for colour options.


Please note that once a coloured radiator has been ordered, it cannot be cancelled or returned.





SOFTLINE DECO VERTICAL CONCEPT

50 Δ t
(75/65/20°C)




Height mm	Length mm	Sections	Stelrad UIN	Heat output Watts	Heat output Btu/hr
1800	400	12	24182204	1476	5036
	500	15	24182205	1845	6295
	600	18	24182206	2214	7554

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 80 should be applied.



We recommend TRV Valves to complete the look. See page 84 for more information.





SOFTLINE PLAN

50 Δ t

(75/65/20°C)

K1



K2



Height mm	Length mm	K1				K2			
		White UIN	Colour UIN	Watts	Btu/hr	White UIN	Colour UIN	Watts	Btu/hr
300	500	85301105	85301105c	235	802	85302205	85302205c	465	1587
	1000	85301110	85301110c	469	1600	85302210	85302210c	929	3170
	1500	85301115	85301115c	704	2402	85302215	85302215c	1394	4756
450	400	85451104	85451104c	280	955	85452204	85452204c	518	1767
	600	85451106	85451106c	421	1436	85452206	85452206c	778	2655
	800	85451108	85451108c	561	1914	85452208	85452208c	1037	3538
	1000	85451110	85451110c	701	2392	85452210	85452210c	1296	4422
	1200	85451112	85451112c	841	2869	85452212	85452212c	1555	5306
	1400	85451114	85451114c	981	3347	85452214	85452214c	1814	6189
	1600	85451116	85451116c	1122	3828	85452216	85452216c	2074	7076
600	1800	85451118	85451118c	1262	4306	85452218	85452218c	2333	7960
	400	85601104	85601104c	364	1242	85602204	85602204c	654	2231
	600	85601106	85601106c	547	1866	85602206	85602206c	980	3344
	800	85601108	85601108c	729	2487	85602208	85602208c	1307	4459
	1000	85601110	85601110c	911	3108	85602210	85602210c	1634	5575
	1200	85601112	85601112c	1093	3729	85602212	85602212c	1961	6691
	1400	85601114	85601114c	1275	4350	85602214	85602214c	2288	7807
	1600	85601116	85601116c	1458	4975	85602216	85602216c	2614	8919
1800	85601118	85601118c	1640	5596	85602218	85602218c	2941	10035	
2000	85601120	85601120c	1822	6217	85602220	85602220c	3268	11150	

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 80 should be applied.

COLOUR OPTIONS

Comes in White as standard (RAL 9016). Please refer to page 82 for colour options.

Please note that once a coloured radiator has been ordered, it cannot be cancelled or returned.





SOFTLINE PLAN CONCEPT

50 Δ t
(75/65/20°C)

K1



K2



Height mm	Length mm	Stelrad UIN	Heat output		Stelrad UIN	Heat output	
			Watts	Btu/hr		Watts	Btu/hr
600	400	25601104	364	1242	25602204	654	2231
	600	25601106	547	1866	25602206	980	3344
	800	25601108	729	2487	25602208	1307	4459
	1000	25601110	911	3108	25602210	1634	5575
	1200	25601112	1093	3729	25602212	1961	6691
	1400	25601114	1275	4350	25602214	2288	7807

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 80 should be applied.



Colour radiators in just 14 working days!




SOFTLINE PLAN VERTICAL

50 Δ t

(75/65/20°C)

K2




Height mm	Length mm	Sections	White UIN	Colour UIN	Heat output	
					Watts	Btu/h
1800	400	12	87322418	87322418c	1476	5036
	500	15	87322518	87322518c	1845	6295
	600	18	87322618	87322618c	2214	7554

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 80 should be applied.



We recommend TRV Valves to complete the look. See page 84 for more information.

COLOUR OPTIONS

Comes in White as standard (RAL 9016). Please refer to page 82 for colour options.


Please note that once a coloured radiator has been ordered, it cannot be cancelled or returned.





SOFTLINE PLAN VERTICAL CONCEPT

50 Δ t
(75/65/20°C)




Height mm	Length mm	Sections	Stelrad UIN	Heat output	
				Watts	Btu/h
1800	400	12	25182204	1476	5036
	500	15	25182205	1845	6295
	600	18	25182206	2214	7554

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 80 should be applied.



We recommend TRV Valves to complete the look. See page 84 for more information.



Colour radiators in just 14 working days!



SOFTLINE COLUMN HORIZONTAL

50Δt

(75/65/20°C)

2 COLUMN

Height mm	Length mm	White UIN	Colour UIN	Watts	Heat output Btu/h
500	628	563012	563012c	499	1703
	858	563013	563013c	691	2358
	1042	563014	563014c	845	2884
	1272	563015	563015c	1037	3539
600	628	563028	563028c	589	2010
	858	563029	563029c	815	2782
	1042	563030	563030c	997	3403
	1272	563031	563031c	1223	4174

3 COLUMN

4 COLUMN

Height mm	Length mm	White UIN	Colour UIN	Heat output		Length mm	White UIN	Colour UIN	Heat output	
				Watts	Btu/hr				Watts	Btu/hr
300	444	563000	563000c	288	983	444	563007	563007c	377	1287
	628	563001	563001c	416	1420	628	563008	563008c	545	1860
	858	563002	563002c	576	1966	858	563009	563009c	754	2573
	1042	563003	563003c	704	2403	1042	563010	563010c	922	3147
	1272	563004	563004c	864	2949	1272	563011	563011c	1131	3860
	1456	563005	563005c	992	3386	-	-	-	-	-
500	1870	563006	563006c	1280	4369	-	-	-	-	-
	444	563016	563016c	464	1584	444	563023	563023c	608	2075
	628	563017	563017c	671	2290	628	563024	563024c	879	3000
	858	563018	563018c	929	3171	858	563025	563025c	1217	4154
	1042	563019	563019c	1135	3874	1042	563026	563026c	1487	5075
	1272	563020	563020c	1393	4754	1272	563027	563027c	1825	6229
600	1456	563021	563021c	1600	5461	-	-	-	-	-
	1870	563022	563022c	2064	7044	-	-	-	-	-
	444	563032	563032c	548	1870	444	563039	563039c	718	2451
	628	563033	563033c	792	2703	628	563040	563040c	1037	3539
	858	563034	563034c	1096	3741	858	563041	563041c	1436	4901
	1042	563035	563035c	1340	4573	1042	563042	563042c	1756	5993
750	1272	563036	563036c	1644	5611	1272	563043	563043c	2155	7355
	1456	563037	563037c	1888	6444	-	-	-	-	-
	1870	563038	563038c	2436	8314	-	-	-	-	-
	444	-	-	-	-	444	563049	563049c	877	2993
	628	-	-	-	-	628	563050	563050c	1266	4321
	858	563044	563044c	1337	4563	858	563051	563051c	1753	5983
750	1042	563045	563045c	1635	5580	1042	563052	563052c	2143	7314
	1272	563046	563046c	2006	6846	1272	563053	563053c	2630	8976
	1456	563047	563047c	2303	7860	-	-	-	-	-
	1870	563048	563048c	2972	10143	-	-	-	-	-

Δt50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt40 or Δt30 output (see your installer or system designer or download from stelradprofessional.com).

Due to production tolerances, the length of the product and therefore the tap centres could contain a variation of +/- 1.5% of the overall stated length.

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 80 should be applied.

Floor mounting brackets are available, for more information see page 84.

COLOUR OPTIONS

Comes in White as standard (RAL 9016). Please refer to page 82 for colour options.

Please note that once a coloured radiator has been ordered, it cannot be cancelled or returned.





SOFTLINE COLUMN CONCEPT

50 Δ t

(75/65/20°C)

3 COLUMN

Height mm	Length mm	Elements	Stelrad UIN	Heat output	
				Watts	Btu/hr
600	628	13	563133	792	2703
	858	18	563134	1096	3741
	1042	22	563135	1340	4573
	1272	27	563136	1644	5611

4 COLUMN

Height mm	Length mm	Elements	Stelrad UIN	Heat output	
				Watts	Btu/hr
600	628	13	563140	1037	3539
	858	18	563141	1436	4901
	1042	22	563142	1756	5993
	1272	27	563143	2155	7355

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

Due to production tolerances, the length of the product and therefore the tap centres could contain a variation of +/- 1.5% of the overall stated length.

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 80 should be applied.

Floor mounting brackets are available, for more information see page 84.





Natural Cast

COLOUR OPTIONS



Aged Gold



Anthracite Black



Bright Gold



Bronze



Copper



Natural Cast



Old Penny



Old Pewter



Pewter



Sovereign Gold

OPTIONAL VALVES



Antique Brass
Stelrad UIN: 263060



Brushed Nickel
Stelrad UIN: 263061

The thermostatic radiator valve comes with an in-built temperature sensor which maintains the room at the temperature you have selected.

CAST IRON COLUMN

50Δt

(75/65/20°C)

4 COLUMN

6 COLUMN

Height mm	Length mm	Sections	Stelrad UIN	Heat output Watts	Btu/h	Weight (kg)	Stelrad UIN	Heat output Watts	Btu/h	Weight (kg)
360	512	8	264073	378	1291	28	-	-	-	-
	573	9	264074	426	1452	31	-	-	-	-
	634	10	264075	473	1614	34	-	-	-	-
	695	11	264076	520	1775	38	-	-	-	-
	756	12	264077	568	1937	41	-	-	-	-
	816	13	264078	615	2098	45	-	-	-	-
	877	14	264079	662	2259	48	-	-	-	-
	938	15	264080	710	2421	52	-	-	-	-
	999	16	264081	757	2582	55	-	-	-	-
	1060	17	264082	804	2744	59	-	-	-	-
1120	18	264083	851	2905	62	-	-	-	-	
1181	19	264084	899	3066	65	-	-	-	-	
505	512	8	264085	538	1834	34	264037	772	2634	67
	573	9	264086	605	2064	38	264038	869	2963	75
	634	10	264087	672	2293	42	264039	965	3293	84
	695	11	264088	739	2522	46	264040	1062	3622	92
	756	12	264089	806	2751	50	264041	1158	3951	100
	816	13	264090	874	2981	55	264042	1255	4280	109
	877	14	264091	941	3210	59	264043	1351	4610	117
	938	15	264092	1008	3439	63	264044	1448	4939	125
	999	16	264093	1075	3669	67	264045	1544	5268	134
	1060	17	264094	1142	3898	71	264046	1641	5597	142
1120	18	264095	1210	4127	75	264047	1737	5927	150	
1181	19	264096	1277	4356	80	264048	1834	6256	159	
660	512	8	264001	706	2410	44	264049	1012	3453	77
	573	9	264002	795	2712	50	264050	1139	3885	86
	634	10	264003	883	3013	56	264051	1265	4316	96
	695	11	264004	971	3314	61	264052	1392	4748	105
	756	12	264005	1060	3615	67	264053	1518	5179	115
	816	13	264006	1148	3917	72	264054	1645	5611	125
	877	14	264007	1236	4218	78	264055	1771	6043	134
	938	15	264008	1325	4519	83	264056	1898	6474	144
	999	16	264009	1413	4820	89	264057	2024	6906	153
	1060	17	264010	1501	5122	94	264058	2151	7338	163
1120	18	264011	1589	5423	100	264059	2277	7769	173	
1181	19	264012	1678	5724	106	264060	2404	8201	182	
760	512	8	264013	852	2907	50	-	-	-	-
	573	9	264014	959	3270	56	-	-	-	-
	634	10	264015	1065	3634	62	-	-	-	-
	695	11	264016	1172	3997	68	-	-	-	-
	756	12	264017	1278	4361	75	-	-	-	-
	816	13	264018	1385	4724	81	-	-	-	-
	877	14	264019	1491	5087	87	-	-	-	-
	938	15	264020	1598	5451	93	-	-	-	-
	999	16	264021	1704	5814	100	-	-	-	-
	1060	17	264022	1811	6177	106	-	-	-	-
1120	18	264023	1917	6541	112	-	-	-	-	
1181	19	264024	2024	6904	118	-	-	-	-	
960	512	8	264025	1019	3478	63	264061	1459	4979	98
	573	9	264026	1147	3912	71	264062	1642	5601	111
	634	10	264027	1274	4347	79	264063	1824	6223	123
	695	11	264028	1401	4782	86	264064	2006	6846	135
	756	12	264029	1529	5216	94	264065	2189	7468	147
	816	13	264030	1656	5651	102	264066	2371	8091	160
	877	14	264031	1784	6086	110	264067	2554	8713	172
	938	15	264032	1911	6520	118	264068	2736	9335	184
	999	16	264033	2038	6955	126	264069	2918	9958	196
	1060	17	264034	2166	7390	133	264070	3101	10580	209
1120	18	264035	2293	7824	141	264071	3283	11202	221	
1181	19	264036	2421	8259	149	264072	3466	11825	233	

Δt50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt40 or Δt30 output (see your installer or system designer or download from stelradprofessional.com).

Due to production tolerances, the length of the product and therefore the tap centres could contain a variation of +/- 1.5% of the overall stated length.


For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 80 should be applied.



Colour radiators in just 14 working days!

FFEE

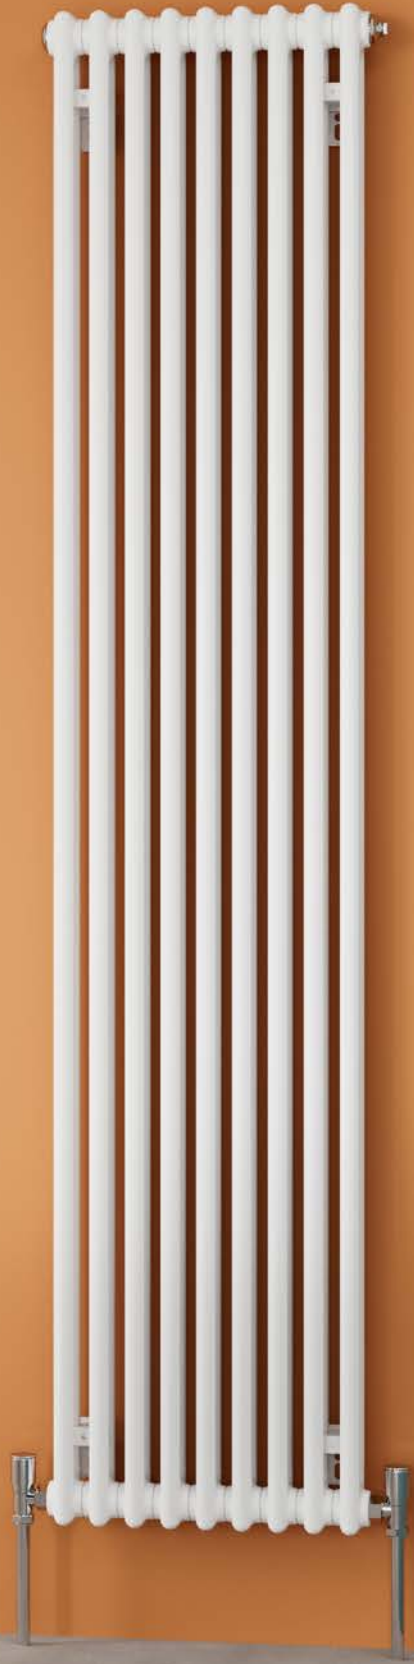

SOFTLINE COLUMN VERTICAL

50 Δ t

(75/65/20°C)

2 COLUMN

Height mm	Length mm	Elements	White UIN	Colour UIN	Heat output	
					Watts	Btu/hr
1800	352	9	563054	563054c	868	2962
	444	9	563055	563055c	1116	3809
2000	352	9	563056	563056c	966	3297
	444	9	563057	563057c	1242	4239
2500	352	9	563058	563058c	1197	4085
	444	9	563059	563059c	1539	5253

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

Due to production tolerances, the length of the product and therefore the tap centres could contain a variation of +/- 1.5% of the overall stated length.

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 80 should be applied.

COLOUR OPTIONS

Comes in White as standard (RAL 9016). Please refer to page 82 for colour options.

Please note that once a coloured radiator has been ordered, it cannot be cancelled or returned.





SOFTLINE COLUMN VERTICAL CONCEPT

50 Δ t

(75/65/20°C)

2 COLUMN

Height mm	Length mm	Elements	Columns	Stelrad UIN	Heat output	
					Watts	Btu/hr
1800	444	9	2	563155	1116	3809
2000	444	9	2	563157	1242	4239

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

Due to production tolerances, the length of the product and therefore the tap centres could contain a variation of +/- 1.5% of the overall stated length.

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 80 should be applied.



Colour radiators in just 14 working days!



SOFTLINE CONCORD PLANE

50Δt

(75/65/20°C)

SINGLE



DOUBLE



Height mm	Length mm	Elements	SINGLE				DOUBLE			
			White UIN	Colour UIN	Heat output Watts	Heat output Btu/hr	White UIN	Colour UIN	Heat output Watts	Heat output Btu/hr
444	500	6	548346	548346c	392	1338	548397	548397c	678	2313
	600	6	548347	548347c	470	1604	548398	548398c	814	2777
	700	6	548348	548348c	549	1873	548399	548399c	949	3238
	800	6	548349	548349c	627	2139	548400	548400c	1085	3702
	900	6	548350	548350c	706	2409	548401	548401c	1220	4163
	1000	6	548351	548351c	784	2675	548402	548402c	1356	4627
	1100	6	548352	548352c	862	2941	548403	548403c	1492	5091
	1200	6	548353	548353c	941	3211	548404	548404c	1627	5552
592	1400	6	548354	548354c	1098	3747	548405	548405c	1898	6476
	500	8	548363	548363c	501	1709	548414	548414c	2170	7404
	600	8	548364	548364c	601	2051	548415	548415c	2441	8329
	700	8	548365	548365c	701	2392	548416	548416c	2712	9254
	800	8	548366	548366c	802	2737	548417	548417c	2983	10178
	900	8	548367	548367c	902	3078	548418	548418c	3254	11103
	1000	8	548368	548368c	1002	3419	548419	548419c	3526	12031
	1100	8	548369	548369c	1102	3760	548420	548420c	3797	12956
1200	8	548370	548370c	1202	4101	548421	548421c	4068	13881	
1400	8	548371	548371c	1403	4787	548422	548422c	2376	8107	

Δt50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt40 or Δt30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 80 should be applied.

COLOUR OPTIONS

Comes in White as standard (RAL 9016). Please refer to page 82 for colour options.

Please note that once a coloured radiator has been ordered, it cannot be cancelled or returned.



Colour radiators in just 14 working days!



SOFTLINE CONCORD VERTICAL

50Δt

(75/65/20°C)

SINGLE



Height mm	Length mm	Elements	White UIN	Colour UIN	Watts	Heat output Btu/hr
1800	444	6	548340	548340c	852	2907
	592	8	548341	548341c	1136	3876
	740	10	548342	548342c	1420	4845
2000	444	6	548343	548343c	942	3214
	592	8	548344	548344c	1256	4286
	740	10	548345	548345c	1570	5357

DOUBLE



Height mm	Length mm	Elements	White UIN	Colour UIN	Watts	Heat output Btu/hr
1800	444	6	548640	548640c	1254	4279
	592	8	548641	548641c	1672	5705
	740	10	548642	548642c	2090	7131
2000	444	6	548643	548643c	1386	4729
	592	8	548644	548644c	1848	6306
	740	10	548645	548645c	2310	7882

Δt50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt40 or Δt30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 80 should be applied.

COLOUR OPTIONS

Comes in White as standard (RAL 9016). Please refer to page 82 for colour options.

Please note that once a coloured radiator has been ordered, it cannot be cancelled or returned.





SOFTLINE CONCORD VERTICAL CONCEPT

50 Δ t

(75/65/20°C)

SINGLE



Height mm	Length mm	Stelrad UIN	Heat output	
			Watts	Btu/hr
1800	444	548652	852	2907
	592	548653	1136	3876
	740	548654	1420	4845

DOUBLE



Height mm	Length mm	Stelrad UIN	Heat output	
			Watts	Btu/hr
1800	444	548655	1254	4279
	592	548656	1672	5705
	740	548657	2090	7131

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 80 should be applied.





SOFTLINE CONCORD SLIMLINE

50 Δ t

(75/65/20°C)

SINGLE



Height mm	Length mm	Elements	White UIN	Colour UIN	Watts	Heat output Btu/hr
1800	320	8	548300	548300c	872	2975
	440	11	548301	548301c	1199	4091
	520	13	548302	548302c	1417	4835
	640	16	548303	548303c	1744	5951
2000	320	8	548304	548304c	976	3330
	440	11	548305	548305c	1342	4579
	520	13	548306	548306c	1586	5412
	640	16	548307	548307c	1952	6661

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 80 should be applied.

COLOUR OPTIONS

Comes in White as standard (RAL 9016). Please refer to page 82 for colour options.

Please note that once a coloured radiator has been ordered, it cannot be cancelled or returned.





SOFTLINE CONCORD SLIMLINE CONCEPT

50 Δ t
(75/65/20°C)

SINGLE



Height mm	Length mm	Elements	Stelrad UIN	Heat output Watts Btu/hr	
1800	320	8	548658	872	2975
	440	11	548659	1199	4091
	520	13	548660	1417	4835
	640	16	548661	1744	5951

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 80 should be applied.





Curved
Chrome

CLASSIC TOWEL RAIL

50 Δ t

(75/65/20°C)

Height mm	Length mm	Max Projection mm	STRAIGHT				STRAIGHT CHROME		
			White UIN	Colour UIN	Heat output Watts	Heat output Btu/hr	Stelrad UIN	Heat output Watts	Heat output Btu/hr
760	500	100	148070	148070c	376	1282	147002	246	839
	600	100	148071	148071c	445	1517	147003	294	1003
1211	500	100	148072	148072c	576	1964	147004	379	1292
	600	100	148073	148073c	686	2339	147005	453	1545
1744	500	100	148074	148074c	844	2878	142768	557	1899
	600	100	148075	148075c	1000	3410	142769	667	2274

Height mm	Length mm	Max Projection mm	CURVED				CURVED CHROME		
			White UIN	Colour UIN	Heat output Watts	Heat output Btu/hr	Stelrad UIN	Heat output Watts	Heat output Btu/hr
760	500	100	147006	147006c	376	1282	147012	246	839
	600	100	147007	147007c	445	1517	147013	294	1003
1211	500	100	147008	147008c	576	1964	147014	379	1292
	600	100	147009	147009c	686	2339	147015	453	1545
1744	500	100	147010	147010c	844	2878	147016	557	1899
	600	100	147011	147011c	1000	3410	147017	667	2274

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

CLASSIC MINI TOWEL RAIL

50 Δ t

(75/65/20°C)


Height mm	Length mm	Max Projection mm	STRAIGHT				STRAIGHT CHROME		
			White UIN	Colour UIN	Heat output Watts	Heat output Btu/hr	Stelrad UIN	Heat output Watts	Heat output Btu/hr
678	400	100	147000	147000c	273	931	147001	175	597

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 80 should be applied.

HORIZONTAL TUBE DIMENSION

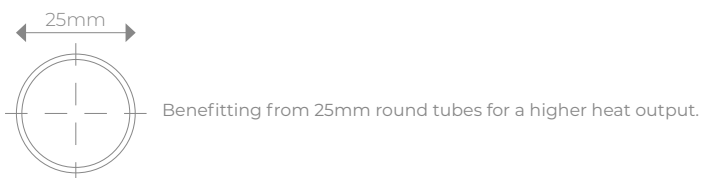

COLOUR OPTIONS

Comes in White (RAL 9016) or Chrome as standard. Please refer to page 82 for colour options.

Please note that once a coloured radiator has been ordered, it cannot be cancelled or returned.





Polished
steel

STAINLESS STEEL TOWEL RAIL

50 Δ t

(75/65/20°C)

POLISHED STEEL

Height mm	Length mm	Stelrad UIN	Watts	Heat output Btu/hr
750	500	741001	190	648
	600	741003	340	1160
1200	500	741002	299	1020
	600	741003	340	1160
1500	500	741004	370	1262

BRUSHED STEEL


Height mm	Length mm	Stelrad UIN	Watts	Heat output Btu/hr
750	500	742001	190	648
	600	742003	340	1160
1200	500	742002	299	1020
	600	742003	340	1160
1500	500	742004	370	1262

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 80 should be applied.

HORIZONTAL TUBE DIMENSION





CALIENTE RAIL

50 Δ t

(75/65/20°C)

STRAIGHT SINGLE

Height mm	Lengths mm	White UIN	Colour UIN	Watts	Heat output Btu/hr
755	450	407501450	407501450c	389	1327
	500	407501500	407501500c	431	1471
	600	407501600	407501600c	517	1764
	750	407501750	407501750c	645	2201
1199	450	401101450	401101450c	615	2098
	500	401101500	401101500c	675	2303
	600	401101600	401101600c	794	2709
	750	401101750	401101750c	972	3316
1791	450	401701450	401701450c	900	3071
	500	401701500	401701500c	986	3364
	600	401701600	401701600c	1158	3951
	750	401701750	401701750c	1416	4831
2013	450	402001450	402001450c	1002	3419
	500	402001500	402001500c	1099	3750
	600	402001600	402001600c	1294	4415
	750	402001750	402001750c	1586	5411


STRAIGHT DOUBLE

Height mm	Lengths mm	White UIN	Colour UIN	Watts	Heat output Btu/hr
755	450	407502450	407502450c	565	1928
	500	407502500	407502500c	626	2136
	600	407502600	407502600c	749	2556
	750	407502750	407502750c	934	3187
1199	450	401102450	401102450c	868	2962
	500	401102500	401102500c	963	3286
	600	401102600	401102600c	1154	3937
	750	401102750	401102750c	1441	4917
1791	450	401702450	401702450c	1268	4326
	500	401702500	401702500c	1402	4784
	600	401702600	401702600c	1670	5698
	750	401702750	401702750c	2073	7073
2013	450	402002450	402002450c	1427	4869
	500	402002500	402002500c	1576	5377
	600	402002600	402002600c	1874	6394
	750	402002750	402002750c	2321	7919

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).


For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 80 should be applied.



We recommend TRV Valves to complete the look. See page 84 for more information.

HORIZONTAL TUBE DIMENSION



Benefitting from 22mm round tubes for a higher heat output.

COLOUR OPTIONS



Comes in White as standard (RAL 9016). Please refer to page 82 for colour options.

Please note that once a coloured radiator has been ordered, it cannot be cancelled or returned.

Brackets are colour matched for White, Anthracite and Black rails; all other colours come with Chrome brackets.





RAL 7032
Pebble
grey

CONCORD RAIL

50Δt

(75/65/20°C)


STRAIGHT SINGLE

Height mm	Length mm	Tap centres	White UIN	Colour UIN	Heat output Watts Btu/hr	
731	450	400	148581	148581c	342	1167
	600	550	148582	148582c	447	1525
1186	450	400	148583	148583c	530	1808
	600	550	148584	148584c	694	2368
1511	450	400	148585	148585c	666	2272
	600	550	148586	148586c	869	2965
1771	450	400	148587	148587c	777	2651
	600	550	148588	148588c	1010	3446

Δt50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt40 or Δt30 output (see your installer or system designer or download from stelradprofessional.com).


For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 80 should be applied.



We recommend TRV Valves to complete the look. See page 84 for more information.

HORIZONTAL TUBE DIMENSION



COLOUR OPTIONS

Comes in White as standard (RAL 9016). Please refer to page 82 for colour options.

Please note that once a coloured radiator has been ordered, it cannot be cancelled or returned.





50 Δ t

(75/65/20°C)

STRAIGHT


Height mm	Length mm	Stelrad UIN	Watts	Heat output Btu/hr
750	500	720001	247	843
1000	500	720002	306	1044
1200	500	720003	341	1164
1500	500	720004	421	1437

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 80 should be applied.

HORIZONTAL TUBE DIMENSION





CONCORD SIDE CHROME

50 Δ t

(75/65/20°C)


STRAIGHT

Height mm	Length mm	Stelrad UIN	Watts	Heat output Btu/hr
830	500	712001	221	754
1130	500	712002	297	1013
1430	500	712003	371	1266
1730	500	712004	448	1529

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).


For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 80 should be applied.



We recommend TRV Valves to complete the look. See page 84 for more information.

HORIZONTAL TUBE DIMENSION





CONCORD SIDE CONCEPT

50 Δ t

(75/65/20°C)


STRAIGHT

Height mm	Length mm	Stelrad UIN	Watts	Heat output Btu/hr
830	500	711001	374	1276
1130	500	711002	483	1648
1430	500	711003	602	2054

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).


For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.


For systems not operating at DeltaT 50 the correction factors table on page 80 should be applied.



We recommend TRV Valves to complete the look. See page 84 for more information.

HORIZONTAL TUBE DIMENSION



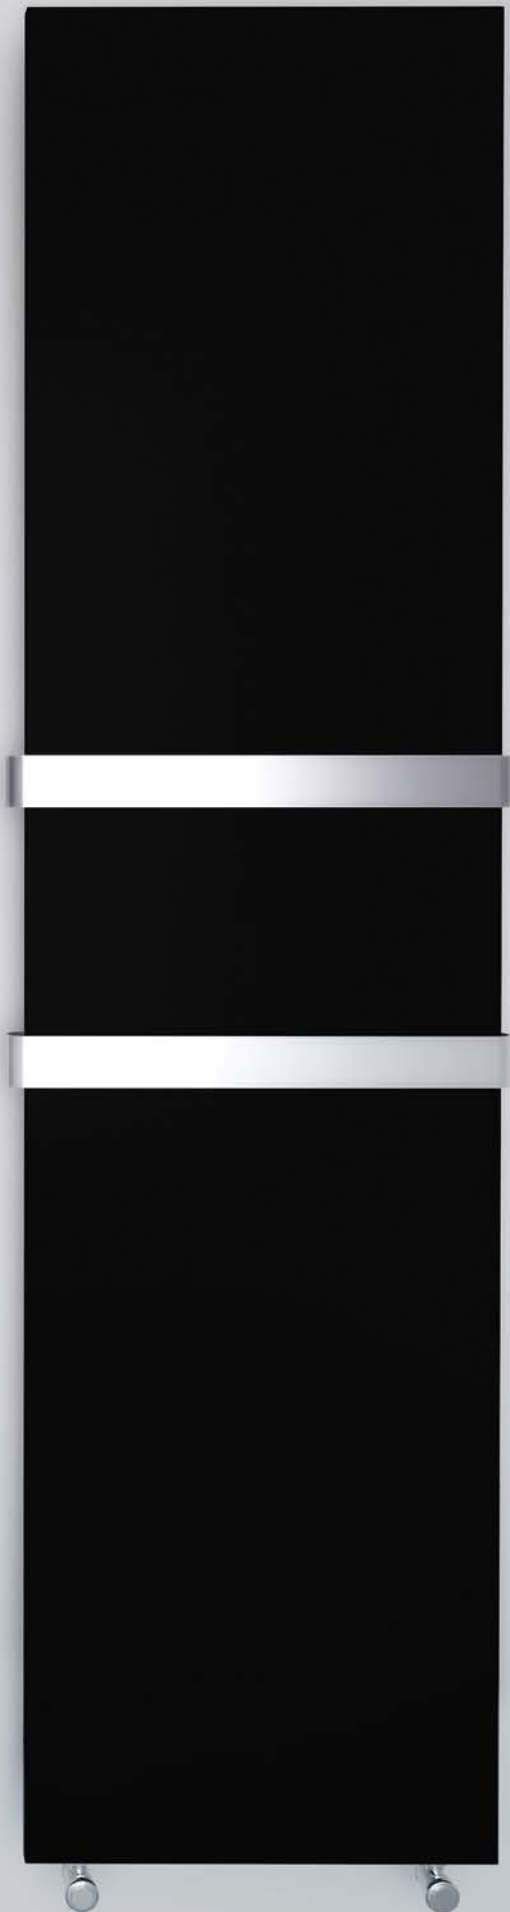


ML170
Graphite
black

VERTICAL ULTRA

50 Δ t

(75/65/20°C)

K2




Front Panel Height mm	Emitter Height mm	Front Panel Length mm	Emitter Length mm	Stelrad UIN	Heat output	
					Watts	Btu/hr
1040	1000	470	400	86110224	857	2924
		570	500	86110225	1071	3654
		670	600	86110226	1285	4384
1240	1200	470	400	86112224	999	3409
		570	500	86112225	1249	4262
		670	600	86112226	1499	5115
1840	1800	470	400	86118224	1476	5036
		570	500	86118225	1845	6295
		670	600	86118226	2214	7554
2040	2000	470	400	86120224	1584	5405
		570	500	86120225	1980	6756
		670	600	86120226	2376	8107

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 80 should be applied.



We recommend TRV Valves to complete the look. See page 84 for more information.

ADDITIONAL TOWEL RAIL BAR(S) CAN BE ADDED AS AN OPTIONAL EXTRA

VERTICAL ULTRA TOWEL RAIL BAR

Fits emitter length	Stelrad UIN	Radiator Height	Max no. of bars
400mm wide	83200004	1000	1
500mm wide	83200005	1200	2
600mm wide	83200006	1800	3
		2000	3

Towel rail bar is 120mm wider than actual radiator.
Maximum three towel rail bars per radiator.

For more information visit stelradprofessional.com

COLOUR OPTIONS

Please refer to page 85 for colour options.

All colour radiators have up to a 14 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

NB: When choosing a colour only the front fascia panel can be coloured. Where the product is 1000mm and 1200mm, the emitter, top grille and side panels are black. Where the product is 1800mm and 2000mm, the emitter, top grille and side panels are white.



EXCLUSIVE TO
STELRAD GROUP PLC



LECCO

50 Δ t

(75/65/20°C)

STRAIGHT


Height mm	Length mm	Stelrad UIN	Watts	Heat output Btu/hr
1200	500	730001	200	682

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 80 should be applied.

HORIZONTAL TUBE DIMENSION





CONCORD CHROME VERTICAL

50 Δ t

(75/65/20°C)

SINGLE

Height mm	Length mm	Stelrad UIN	Watts	Heat output Btu/hr
1800	310	751101	395	1348
	390	751102	495	1688
	470	751103	528	1801
	604	751104	654	2232

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

For systems not operating at DeltaT 50 the correction factors table on page 80 should be applied.



ADDITIONAL INFORMATION

EXTRA PERFORMANCE TO GUARANTEED STANDARDS

Stelrad combine the most sophisticated production resources in Europe with substantial investment in testing and verification of performance data - which has helped us create high output radiators delivering heating performance that exceeds expectation.

MORE CHOICE FOR APPLICATION FLEXIBILITY

A range of models provides extra sizing flexibility and covers a multitude of application requirements, including those where there are installation difficulties or where wall space is at a premium.

SUPERB QUALITY FROM DESIGN TO INSTALLATION

Our radiators are specifically designed to minimise any movement, providing a tight, professional fit that will remain in place, even after storage, transit and installation. Convectors are precision welded directly onto the waterways for greater efficiency and economy, with flexible connection options for the highest of commercial and domestic application specifications.

Stelrad radiators are manufactured under ISO 9001 quality systems in the UK and every one comes wrapped in robust, practical packaging that will keep the product pristine, right through to installation. This clever packaging design allows installation to be completed prior to removal.

TEMPERATURE TABLE

For systems not operating at Δt_{50} the factors in the table below should be applied. The output of a given radiator can be obtained by multiplying the quoted Δt_{50} output by the operating factor. Conversely, to derive a non Δt_{50} output, divide the heat output required by the relevant operation factor. This ' Δt_{50} equivalent output' can then be used to select a radiator from the standard tables.

Δt	$^{\circ}\text{C}$ Operating Factor
20	0.304
25	0.406
30	0.515
35	0.629
40	0.748
45	0.872
50	1.000
55	1.132
60	1.267
65	1.406

The corrections factors are calculated using an average n-coefficient of 1.3

COMPUTER GENERATED IMAGES (CGI)

CGIs are for illustration purposes only.

BRANDED STICKER



Please note, all premium panel radiators have a Stelrad branded sticker on the front panel.

WARRANTY LIMITATIONS

Standard steel panel products, which are installed in toilets or any areas of high humidity (including bathrooms, kitchens and shower rooms, etc.) are limited to a twelve month parts and labour warranty.

APPLICATIONS

Stelrad radiators are suitable for two pipe installations. For single pipe applications, it is advisable to use diversion tees in the pipework, as this will assist in obtaining design performance from the radiators. Although our radiators are suitable for Microbore pipework, the back tappings make them unsuitable for twin entry valves.

INSTALLATION

Everything required for installation can be found within each radiator's packaging. Brackets are of a strong design, with open top and deep slots, which facilitate easy and secure installation. Plastic inserts seat the radiator precisely on the bracket minimising expansion and contraction noise.

The neat nickel-plated plug and vent provide a watertight joint, whilst complementing the superior finish.

To facilitate easy one off replacement, nickel-plated brass extension pieces are also available, complete with sealing washer, in 20mm, 30mm and 40mm options. Recommended height from the floor to the base of the radiator is 150mm minimum. This allows adequate airflow when the radiator is placed on the bracket.

CAUTION

When designing for domestic systems we recommend that the Stelrad radiators are only used in heating systems complying with British Standard Code of Practice for Central Heating for Domestic Premises BS EN 12828:2012 and BS EN12831-1:2017.

Single feed, direct cylinders are not recommended as should interchange of water occur, fresh aerated water would enter the heating system, resulting in corrosion.

WATER TREATMENT

On completion of the installation, the system should be properly flushed and filled in accordance with the British Standard Code of Practice BS7593:2019 for the Treatment of Water in Domestic Hot Water Central Heating Systems, Part L of Building Regulations and Good Practice Guidance for Scotland.

After installation of a new Stelrad radiator the central heating system should be cleaned and flushed with cleaner to remove existing contaminants, flux residue and other installation debris which, if left, can cause damage to the new radiator.

Afterwards, treat the system with an inhibitor to ensure long term protection against corrosion and limescale.

A comprehensive range of quality chemicals including inhibitors, cleaners, leak sealers and noise reducers that protect and maintain central heating systems can be obtained from:

Sentinel Performance Solutions Ltd

7650 Daresbury Park,
Warrington,
Cheshire,
WA4 4BS
www.sentinelprotects.com

Fernox

Unit 2 Genesis Business Park,
Albert Drive,
Sheerwater,
Woking,
Surrey,
GU21 5RW
www.fernox.com

TWO COAT PAINT PROCESS

Each Stelrad radiator is subjected to a multi stage cleaning process before the paint is applied. This involves several rinsing stages, including an iron phosphate and demineralisation rinse. The first coat of paint is applied by electrophoresis and the radiator is then stoved and cooled. The second powder coat is applied and the radiator goes through a final curing stage. It is then allowed to cool, prior to packaging.

HEAT LOSS CALCULATORS

The Stelrad Basic & Advanced Heatloss Programme contains an inbuilt U value calculator.

Save time and effort by using the Stelrad heat loss calculators - the perfect solution for accurate sizing and design flexibility.

Basic: stelradprofessional.com/basic-heat-loss-calculator/

Advanced: stelradprofessional.com/starsapp/

For further information and advice call 0800 876 6813.

DELIVERY INFORMATION (FOR CAST IRON COLUMN ONLY)

Please note: Due to the weight of the product a 2-man lift is required and there is a £84 incl. VAT shipping charge per order, per destination for orders under £1200 incl. VAT.

The delivery driver is only able to stop at the closest point on the road at the nearest accessible external hard standing, i.e. pavement.

Due to health and safety legislation the driver is prohibited from lifting any heavy goods (25kg = max. single person lift). They are not insured to enter the property. It is your responsibility to organise the manpower thereafter to be available to move your radiators to a suitable and dry storage area.

Cast Iron Column radiators are delivered individually wrapped with each individual radiator layer separated with a thick card then secured flat onto the pallet(s).

Cast Iron Column radiators have up to a 14 day lead time.

Returning Costs: To return a Cast Iron Column radiator(s) there is a restock charge of £42 per radiator (inclusive of VAT) and a carrier charge of £84 (inclusive of VAT). If there are more than five radiators being returned the carrier charge may increase, this will be discussed when you make your return request to Stelrad.

COLOUR GUIDE

55 COLOUR OPTIONS. 14-DAY LEAD TIME.

Stelrad Radiators are available in white (RAL 9016) as standard, however the specific radiators identified below are **now available in a variety of colours within 14 working days.**


STANDARD COLOUR



RAL 9016
Traffic white

PRODUCTS - *Softline Silhouette, Softline Deco, Softline Plan, Softline Column, Softline Concord, Classic Towel Rail, Caliente Rail and Concord Rail ranges*

RAL COLOURS - Satin Finish



1001
Beige



1013
Oyster white



1015
Light ivory



9001
Cream



9002
Grey white



9003
Signal white




9010
Pure white




9016
Traffic white




9018
Papyrus white




9005
Jet black




9017
Traffic black




7001
Silver grey




7011
Iron grey



7015
Slate grey



7016
Anthracite grey



7030
Stone grey




7032
Pebble grey




7035
Light grey




7036
Platinum grey



7037
Dusty grey



7038
Agate grey




7039
Quartz grey




5002
Ultramarine blue



5010
Gentian blue




5012
Light blue



5014
Pigeon blue



5015
Sky blue




5022
Night blue

Please note: When a coloured radiator or radiators have been ordered they cannot be cancelled or returned.



RAL COLOURS (continued)




5024
Pastel blue



6005
Light moss green




6018
Yellow green




6019
Pastel green




6020
Chrome green



6027
Light green



6033
Mint turquoise



6034
Pastel turquoise



3000
Flame red




3002
Carmine red




3003
Ruby red



3005
Wine red



2003
Pastel orange



2008
Bright red orange



1004
Golden yellow




1016
Sulphur yellow



1021
Colza yellow




3015
Light pink




8014
Sepia




8017
Chocolate brown




7026
Granite



1019
Cappuccino




8028
Terra brown



9011
Graphite black


METALLIC



1247M
Bronze metallic



7001M
Silver metallic



9007M
Grey metallic

ACCESSORIES

FULL HEIGHT & ANTI-LIFT BRACKETS



300mm wide UIN 9191
400mm wide UIN 9192
450mm wide UIN 9193
500mm wide UIN 9194
600mm wide UIN 9195
700mm wide UIN 9196

Full height and anti-lift brackets are available for a secure fixing in commercial applications.

PACKAGING & FIXINGS




Robust packaging protects the product right through to hand over. Installation instructions can be found on the reverse of the identification label.

Example packaging above, the packaging for each radiator will vary.

Available for all horizontal panel radiators.

Air Vent & Blanking Plug

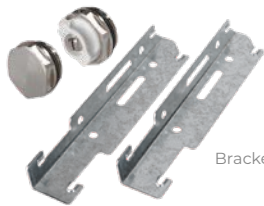

Brackets



Saddle Strips



Branded Clips

All fixing requirements are complete within the packaging. Content will vary depending on product.

OPTIONAL FITTINGS SUPPLIED



1/2" Blanking Plug
UIN 140072

Available for all products.

COLUMN FLOOR MOUNTING BRACKETS

(sold in pairs)



UIN 148137 White
UIN 148138 Anthracite Grey
UIN 148137c Coloured

OPTIONAL TRVS



Brushed Nickel

Antique Brass

Antique Brass UIN 263060
Brushed Nickel UIN 263061


VERTICAL ULTRA TOWEL RAIL BAR



400mm UIN 83200004
500mm UIN 83200005
600mm UIN 83200006

Available for the Vertical Ultra only. Maximum three bars per Vertical.

TOWEL RAIL ELECTRIC HEATER ELEMENT



Electric heating element
150 watt UIN 141536
300 watt UIN 141531
615 watt UIN 141532

Available for the Classic Towel Rail, Caliente Rail & Concord Rail.

FLOOR MOUNTING BRACKETS



300mm UIN 9179 600mm UIN 9181
450mm UIN 9180 700mm UIN 9182
500mm UIN 9197 (sold single)

Available for Softline Compact, Softline Silhouette, Softline Deco & Softline Plan.

Recommend to use 3 on products that are 1800mm or longer.

Applicable for P1, K1 & K2 radiators.

For additional information on alternative floor mounting brackets, please call 0800 876 6813.

CENTRE TAP TRV



Available for the Softline Compact Vertical, Softline Deco Vertical, Softline Plan Vertical, Softline Deco Vertical Concept, Softline Plan Vertical Concept, Caliente Rail,* Concord Rail,* Concord Side Chrome,* Concord Side Concept* and Vertical Ultra.

*Angled Right Centre Tap TRVs only available for towel rails.

UIN	Elements
14531310	CENTRE TAP TRV STRAIGHT WHITE -10MM
14531312	CENTRE TAP TRV STRAIGHT WHITE -1/2IN
14531315	CENTRE TAP TRV STRAIGHT WHITE -15MM
14531410	CENTRE TAP TRV STRAIGHT CHROME -10MM
14531412	CENTRE TAP TRV STRAIGHT CHROME -1/2IN
14531415	CENTRE TAP TRV STRAIGHT CHROME -15MM
14531510	CENTRE TAP TRV ANGLED L WHITE -10MM
14531512	CENTRE TAP TRV ANGLED L WHITE -1/2IN
14531515	CENTRE TAP TRV ANGLED L WHITE -15MM
14531610	CENTRE TAP TRV ANGLED L CHROME -10MM
14531612	CENTRE TAP TRV ANGLED L CHROME -1/2IN
14531615	CENTRE TAP TRV ANGLED L CHROME -15MM
14531710	CENTRE TAP TRV ANGLED R WHITE -10MM*
14531712	CENTRE TAP TRV ANGLED R WHITE -1/2IN*
14531715	CENTRE TAP TRV ANGLED R WHITE -15MM*
14531810	CENTRE TAP TRV ANGLED R CHROME -10MM*
14531812	CENTRE TAP TRV ANGLED R CHROME -1/2IN*
14531815	CENTRE TAP TRV ANGLED R CHROME -15MM*

COLOUR GUIDE

PRODUCTS - Vertical Ultra*

Please note: these radiators have up to a 14 week lead time

NATURAL COLOURS




NT110
Papyrus white



NT120
Pearl white



NT130
Champagne




NT140
Beige



NT160
Pebble grey




SN110
Cream white



NT170
Quartz grey



SN120
Cream




SN130
Mocca




SN140
Bordeaux



SN150
Sepia




SN160
Pale blue




SN170
Black


METALLIC COLOURS




ML110
Dove grey




ML120
Titanium grey




ML140
Granite



ML150
Cappuccino



ML160
Terra brown



ML170
Graphite black

RAL COLOURS



A1004
Golden yellow



A2003
Pastel orange




A3002
Carmine red




A5002
Ultramarine blue




A6018
Yellow green




A7001
Silver grey



A7011
Iron grey



A7016
Anthracite grey



A7030
Stone grey



A7035
Light grey



A8017
Chocolate brown



A9003
Signal white




A9005
Jet black

To request up to 5 colour samples, please email sales@stelradprofessional.com or call **0800 876 6813** with your choices and address details.

The colours shown are reproduced as accurately as this printing process will allow.

For further information on RAL colours please visit www.ralcolorchart.com



RAL 9016
Traffic white
comes as
standard on
all radiators.



Stelrad Radiators are available in white (RAL 9016) as standard, however the specific radiators identified are now available in a variety of colours. The colours shown are reproduced as accurately as this process will allow and can be made to order on the identified products.

All colour radiators have up to an 8 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

To request a colour chart please email sales@stelradprofessional.com

*Please note: When choosing a colour only the front fascia panel can be coloured. Where the product height is 1000mm and 1200mm, the emitter, top grille and side panels are black. If the product height is 1800mm and 2000mm, the emitter, top grille and side panels are white.

GLOSSARY

BIID	The British Institute of Interior Design is a professional organisation for commercial and residential interior designers in Britain.
BSP	British Standard Piping.
Btu/hr	British Thermal Unit per hour is the standard measurement used to state the amount of output of any heat generating device.
CETIAT tested	A leading independent French laboratory which conducts testing and assessments.
CIBSE	The Chartered Institution of Building Services Engineers is the prime source of expertise in the Building Services industry.
Δt	Refers to the difference in temperature between the water circulating in the central heating system and that of the ambient temperature. It is important to use the correct Δt when selecting your radiators, as the same radiator will have different outputs at different water temperatures.
Δt_{50}	Δt_{50} is the UK standard, however Stelrad also quote at lower levels for lower water temperature systems.
 EN 442	EN 442 is the European standard which defines the manufacturing standards for radiators and convectors which operate at temperatures of less than 120°C. The standard defines the type of steel which must be used, the type of pressure testing which must be carried out and the accuracy of the heat outputs quoted in the literature.
Heat loss	Is the amount of heat a room loses, it is therefore an important calculation when determining what size radiator is required to heat a room to the correct level.
ISO14001	Is a set of International regulations related to the environment.
ISO45001	Is a set of International regulations related to health and safety.
ISO9001	Is a set of International regulations related to quality management systems.
ISO50001	Is a set of International regulations related to energy management systems.
K1	Also known as Type 11, is a type of radiator with 1 radiator panel and 1 set of convection fins.
K2	Also known as Type 22, is a type of radiator with 2 radiator panels and 2 sets of convection fins.
K3	Also known as Type 33, is a type of radiator with 3 radiator panels and 3 sets of convection fins.
 marc	MARC - the Manufacturers' Association of Radiators and Convectors.
P+	Also known as Type 21, is a type of radiator with 2 radiator panels and 1 set of convection fins.
P1	Also known as Type 10, is a type of radiator with 1 radiator panel and no convection fins.
P2	Also known as Type 20, is a type of radiator with 2 radiator panels and no convection fins.
RAL	A European wide colour matching system.
TBOE / BOE	Refers to which position the pipes are connected to the radiator, OE means opposite end i.e. 1 pipe on each side, TB is top bottom i.e. 1 pipe is connected to the top and 1 to the bottom, B is both pipes connected to the bottom.
UIN	Is the unique identification number for Stelrad products.
Warranty	The warranty covers any defect that is attributable to a manufacturing, assembly or material fault. Further details available on request.
Watts	Is another measurement for heat output.

ICON KEY



5 year warranty that covers any defect that is attributable to a manufacturing, assembly or material fault. Further details available on request.



10 year warranty that covers any defect that is attributable to a manufacturing, assembly or material fault. Further details available on request.



15 year warranty that covers any defect that is attributable to a manufacturing, assembly or material fault. Further details available on request.



All radiators with this logo are made to order. Made to order radiators cannot be cancelled or returned once ordered.



Building Information Modelling. Visit stelradprofessional.com to download BIM components.



Identified colour radiators have up to a 14 week lead time.



The maximum working pressure is the limit at which the system can operate. Different designs and types of construction requires different gauges of steel in order achieve the desired working pressure.



The maximum working pressure is the limit at which the system can operate. Different designs and types of construction requires different gauges of steel in order achieve the desired working pressure.



The maximum working pressure is the limit at which the system can operate. Different designs and types of construction requires different gauges of steel in order achieve the desired working pressure.



This product comes with a Zinc coating to provide additional protection to help the radiators retain their appearance and prevent corrosion.



Concord Plane, Concord Lo-Line and Concord Vertical are manufactured using 1.25mm thick steel.



Concord Slimline radiators are manufactured using 1.5mm thick steel.



Video available - visit stelradprofessional.com



Fully recyclable products and packaging.



An independently verified Environmental Product Declaration, based on a life cycle assessment (LCA) and compliant with ISO 14025 and EN 15804 standards.

CORPORATE SOCIAL RESPONSIBILITY (CSR)

Stelrad recognises that its success is built on integrating business values and operations to meet the expectations of stakeholders. Stelrad's social, economic and environmental responsibilities are to these stakeholders, which are demonstrated throughout its business practices, policies and achievements. Stelrad are committed to Integrated Management Systems for control of Quality, Health and Safety and Environment, which are certificated to BSI OHSAS / ISO standards.

Wherever possible, Stelrad sources renewable and recyclable materials. 100% of all metal and other raw materials throughout the manufacturing process are recycled.

A full CSR policy document is available on request.



Accreditations



Memberships



Follow us on



Stelrad Limited, Stelrad House, Marriott Road
Mexborough, South Yorkshire, S64 8BN

stelradprofessional.com
Telephone: 0800 876 6813

UIN 208905
SSS/1k/0126



The Cover Laminate Film is made with 30% raw material obtained from chemically recycled post-consumer plastic waste.