

DESIGNER

SERIES




**COMPACT
WITH STYLE
HORIZONTAL**

COMPACT WITH STYLE HORIZONTAL



50 Δ t

(75/65/20°C)



Height mm	Length mm	K1				K2			
		White UIN	Colour UIN	Watts	Btu/hr	White UIN	Colour UIN	Watts	Btu/hr
300	500	7431105	7431105c	235	802	7432205	7432205c	465	1587
	1000	7431110	7431110c	469	1601	7432210	7432210c	929	3171
	1400	7431114	7431114c	657	2242	7432214	7432214c	1301	4440
	2000	7431120	7431120c	938	3201	7432220	7432220c	1858	6341
500	400	7451104	7451104c	298	1017	7452204	7452204c	555	1894
	600	7451106	7451106c	448	1529	7452206	7452206c	833	2843
	700	7451107	7451107c	522	1781	7452207	7452207c	972	3316
	800	7451108	7451108c	597	2038	7452208	7452208c	1110	3788
	900	7451109	7451109c	671	2289	7452209	7452209c	1249	4262
	1000	7451110	7451110c	746	2546	7452210	7452210c	1388	4737
	1100	7451111	7451111c	821	2801	7452211	7452211c	1527	5210
	1200	7451112	7451112c	895	3055	7452212	7452212c	1666	5686
	1400	7451114	7451114c	1044	3563	7452214	7452214c	1943	6631
	1600	7451116	7451116c	1194	4075	7452216	7452216c	2221	7580
	1800	7451118	7451118c	1343	4584	7452218	7452218c	2498	8526
	2000	7451120	7451120c	1492	5092	7452220	7452220c	2776	9474
600	400	7461104	7461104c	348	1188	7462204	7462204c	640	2184
	600	7461106	7461106c	522	1782	7462206	7462206c	961	3280
	700	7461107	7461107c	609	2078	7462207	7462207c	1121	3825
	800	7461108	7461108c	696	2375	7462208	7462208c	1281	4372
	900	7461109	7461109c	783	2672	7462209	7462209c	1441	4917
	1000	7461110	7461110c	870	2969	7462210	7462210c	1601	5464
	1100	7461111	7461111c	957	3265	7462211	7462211c	1761	6009
	1200	7461112	7461112c	1044	3563	7462212	7462212c	1921	6556
	1400	7461114	7461114c	1218	4157	7462214	7462214c	2241	7649
	1600	7461116	7461116c	1392	4751	7462216	7462216c	2562	8744
	1800	7461118	7461118c	1566	5345	7462218	7462218c	2882	9836
	2000	7461120	7461120c	1740	5939	7462220	7462220c	3202	10928

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

Piping connections are the same as the Stelrad Compact.

COLOUR OPTIONS



Comes in White as standard (RAL 9016).

Please note that once a coloured radiator has been ordered, it cannot be cancelled or returned.




www.stelrad.com
Telephone: 0800 876 6813

COMPACT WITH STYLE HORIZONTAL




WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets. Floor mounting brackets available.

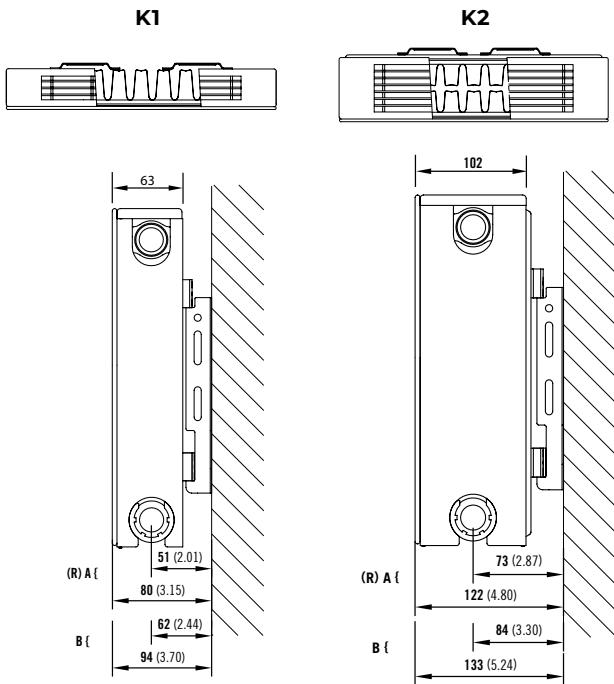

MOUNTING BRACKETS

All dimensions in mm. Inches in brackets. Floor mounting brackets available.


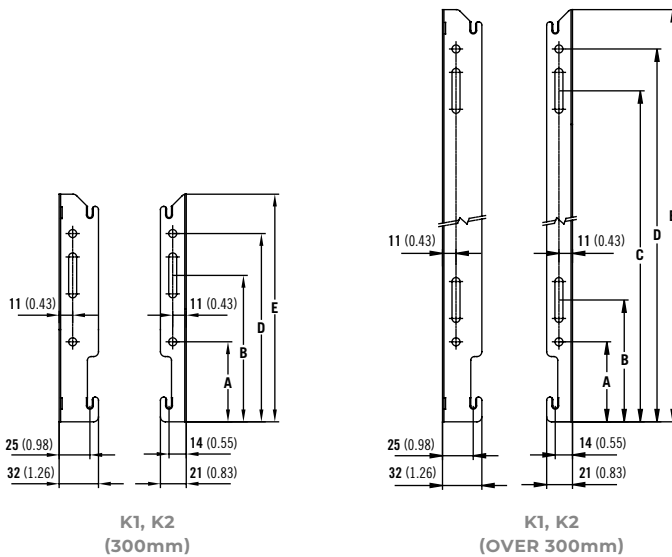


COMPACT WITH STYLE HORIZONTAL



K1 AND K2 LUG POSITIONS (New as of June 2016).

All dimensions in mm. Inches in brackets.

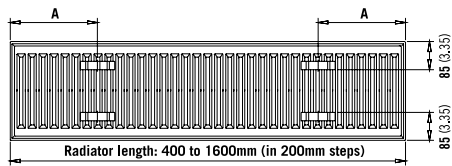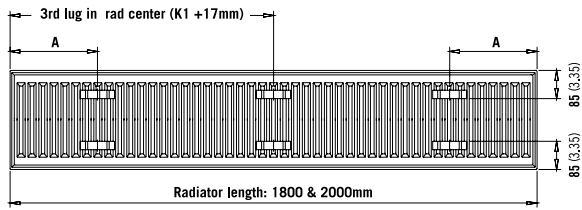


Length	K1		K2	
	mm	mm	mm	mm
400mm	117	4.61	133	5.24
500 - 1000mm	150	5.91	133	5.24
1200 - 1600mm	133	5.24	133	5.24
1800 - 2000mm	3rd lug in rad. centre*			

*K1 + 17mm

CONNECTIONS

Each radiator comes with ½" inlet connections as standard.


PIPING OPTIONS

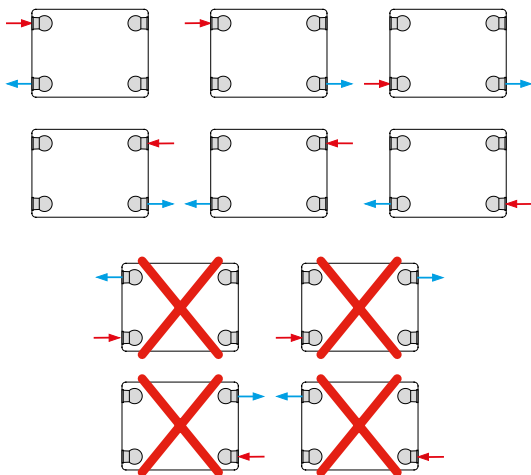

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	K1			K2		
	300	500	600	300	500	600
Height	300	500	600	300	500	600
W/m at 75/65/20	470	746	870	898	1388	1601
n-coefficients	1.26	1.28	1.28	1.30	1.31	1.31
Heated surface area (m ² /m)	2.09	3.80	4.66	3.51	6.33	7.74
Weight (kg/m)	14.13	20.23	24.27	19.30	32.03	38.40
Water contents (l/m)	1.81	2.77	3.23	3.10	5.17	6.20
Wall to tap centre (mm)	54	54	54	-	-	-
Floor standing	-	-	-	76	76	76

PRESSURE DROPS

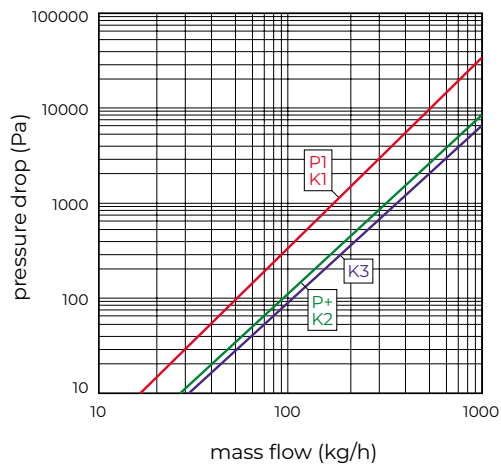

Type	Kv
P1 / K1	1.67
P+ / K2	3.32
K3	3.65

55 COLOUR OPTIONS. 14-DAY LEAD TIME.

Stelrad Radiators are available in white (RAL 9016) as standard, however this radiator is **now available in a variety of colours within 14 working days.**

STANDARD COLOUR




RAL 9016
Traffic white

To request up to 5 colour samples, please email sales@stelrad.com or call **0800 876 6813** with your choices and address details.

The colours shown are reproduced as accurately as this printing process will allow.

RAL COLOURS - Satin Finish



1001
Beige



1013
Oyster white



1015
Light ivory



9001
Cream



9002
Grey white



9003
Signal white



9010
Pure white



9016
Traffic white




9018
Papyrus white




9005
Jet black




9017
Traffic black




7001
Silver grey



7011
Iron grey



7015
Slate grey



7016
Anthacite grey




7030
Stone grey




7032
Pebble grey



7035
Light grey




7036
Platinum grey



7037
Dusty grey




7038
Agate grey




7039
Quartz grey




5002
Ultramarine blue




5010
Gentian blue




5012
Light blue



5014
Pigeon blue



5015
Sky blue




5022
Night blue

Please note: When a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

For further information on RAL colours please visit www.ralcolorchart.com



RAL COLOURS (continued)




5024
Pastel blue



6005
Light moss green




6018
Yellow green




6019
Pastel green




6020
Chrome green



6027
Light green



6033
Mint turquoise



6034
Pastel turquoise




3000
Flame red




3002
Carmine red



3003
Ruby red



3005
Wine red



2003
Pastel orange



2008
Bright red orange



1004
Golden yellow




1016
Sulphur yellow




1021
Colza yellow




3015
Light pink



8014
Sepia




8017
Chocolate brown




7026
Granite



1019
Cappuccino




8028
Terra brown



9011
Graphite black


METALLIC



1247M
Bronze metallic



7001M
Silver metallic



9007M
Grey metallic

Please note: When a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

For further information on RAL colours please visit
www.ralcolorchart.com