

DESIGNER

SERIES


**COMPACT
WITH STYLE
VERTICAL**

50 Δ t
(75/65/20°C)

P2



K2



Height mm	Length mm	Sections	White		Heat output		Colour		Heat output	
			UIN	UIN	Watts	Btu/hr	UIN	UIN	Watts	Btu/hr
1600	300	9	148140	148140c	693	2365	3216220	3216220c	1026	3501
	400	12	-	-	-	-	32162204	32162204c	1368	4668
	500	15	148148	148148c	1155	3942	32162205	32162205c	1710	5835
	600	18	148152	148152c	1386	4730	32162206	32162206c	2052	7002
1800	300	9	148141	148141c	760	2594	32182203	32182203c	1107	3777
	400	12	148145	148145c	1013	3459	32182204	32182204c	1476	5036
	500	15	148149	148149c	1266	4321	32182205	32182205c	1845	6295
	600	18	148153	148153c	1519	5184	32182206	32182206c	2214	7554
	700	21	-	-	-	-	32182207	32182207c	2583	8813
2000	300	9	148142	148142c	824	2812	-	-	-	-
	400	12	148146	148146c	1099	3750	32202204	32202204c	1588	5405
	500	15	148150	148150c	1374	4689	32202205	32202205c	1980	6756
	600	18	148154	148154c	1649	5628	32202206	32202206c	2376	8107
	700	21	-	-	-	-	32202207	32202207c	2772	9458
2200	300	9	148143	148143c	887	3027	32222203	32222203c	1269	4330
	400	12	148147	148147c	1183	4036	32222204	32222204c	1692	5773
	500	15	148151	148151c	1479	5048	32222205	32222205c	2115	7216
	600	18	148155	148155c	1775	6058	32222206	32222206c	2538	8660

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.


COLOUR OPTIONS



Comes in White as standard (RAL 9016).

Please note that once a coloured radiator has been ordered, it cannot be cancelled or returned.

CENTRE TAP TRV




UIN	Elements
14531310	CENTRE TAP TRV STRAIGHT WHITE - 10MM
14531312	CENTRE TAP TRV STRAIGHT WHITE - 1/2IN
14531315	CENTRE TAP TRV STRAIGHT WHITE - 15MM
14531410	CENTRE TAP TRV STRAIGHT CHROME - 10MM
14531412	CENTRE TAP TRV STRAIGHT CHROME - 1/2IN
14531415	CENTRE TAP TRV STRAIGHT CHROME - 15MM
14531510	CENTRE TAP TRV ANGLED L WHITE - 10MM
14531512	CENTRE TAP TRV ANGLED L WHITE - 1/2IN
14531515	CENTRE TAP TRV ANGLED L WHITE - 15MM
14531610	CENTRE TAP TRV ANGLED L CHROME - 10MM
14531612	CENTRE TAP TRV ANGLED L CHROME - 1/2IN
14531615	CENTRE TAP TRV ANGLED L CHROME - 15MM




WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

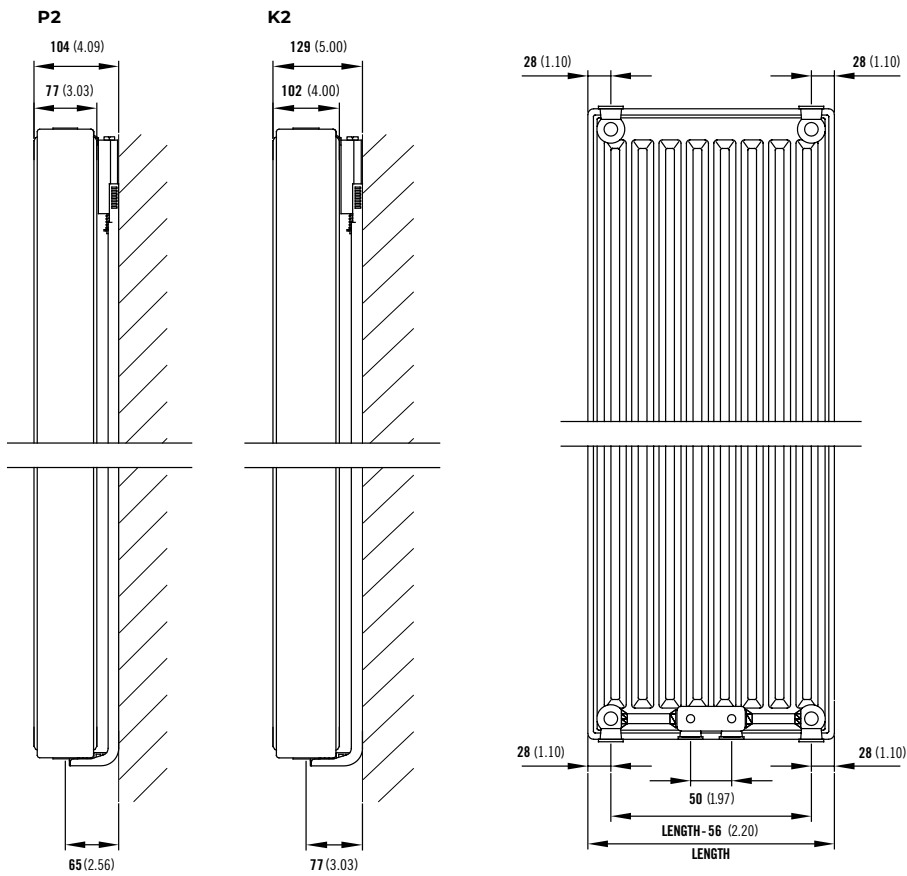


MOUNTED BRACKETS

Height		H2		H3		H4	
mm	inches	mm	inches	mm	inches	mm	inches
1600	63	70	2.75	730	36.02	1390	55.71
1800	70.90	70	2.75	830	43.89	1590	63.58
2000	78.70	70	2.75	930	47.83	1790	71.46
2200	86.60	70	2.75	1030	51.77	1990	79.33

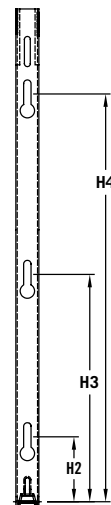


PIPING OPTIONS

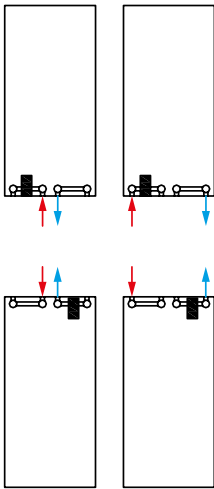

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	P2				K2			
	1600	1800	2000	2200	1600	1800	2000	2200
Height	1600	1800	2000	2200	1600	1800	2000	2200
W/m at 75/65/20	2310	2532	2748	2958	3420	3690	3960	4230
n-coefficients	1.27	1.27	1.27	1.27	1.32	1.32	1.33	1.33
Heated surface area (m ² /m)	7.33	8.25	9.17	10.09	28.99	29.90	37.74	38.66
Weight (kg/m)	77.70	86.70	95.40	105.60	94.20	105.30	116.40	126.60
Water contents (l/m)	14.10	16.20	18.30	20.10	14.10	15.90	17.70	20.10
Wall to tap centre (mm)	65	65	65	65	77	77	77	77

PRESSURE DROPS

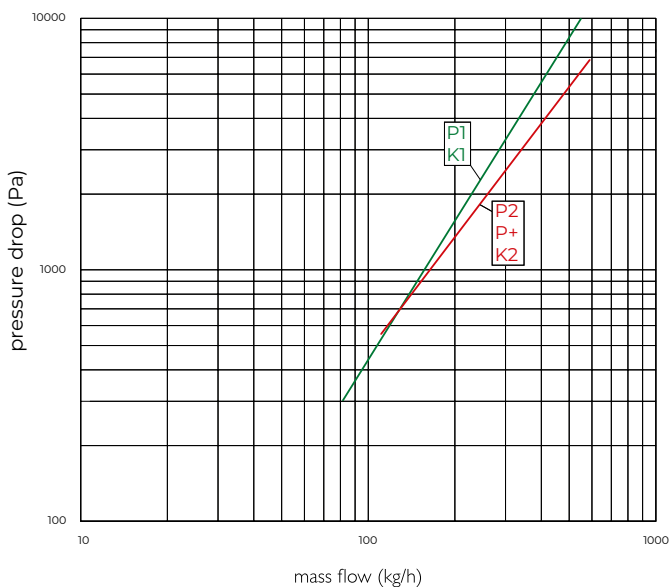

Type	Kv
P1 / K1	1.60
P2 / P+ / K2	1.85

CONNECTIONS

Each radiator comes with ½" inlet connections as standard.

55 COLOUR OPTIONS. 14-DAY LEAD TIME.

Stelrad Radiators are available in white (RAL 9016) as standard, however this radiator is **now available in a variety of colours within 14 working days.**

STANDARD COLOUR




RAL 9016
Traffic white

To request up to 5 colour samples, please email sales@stelrad.com or call **0800 876 6813** with your choices and address details.

The colours shown are reproduced as accurately as this printing process will allow.

RAL COLOURS - Satin Finish



1001
Beige



1013
Oyster white



1015
Light ivory



9001
Cream



9002
Grey white



9003
Signal white



9010
Pure white



9016
Traffic white




9018
Papyrus white




9005
Jet black




9017
Traffic black




7001
Silver grey




7011
Iron grey



7015
Slate grey



7016
Anthacite grey




7030
Stone grey




7032
Pebble grey



7035
Light grey




7036
Platinum grey



7037
Dusty grey



7038
Agate grey




7039
Quartz grey




5002
Ultramarine blue




5010
Gentian blue




5012
Light blue



5014
Pigeon blue



5015
Sky blue




5022
Night blue

Please note: When a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

For further information on RAL colours please visit www.ralcolorchart.com



RAL COLOURS (continued)




5024
Pastel blue




6005
Light moss green



6018
Yellow green




6019
Pastel green




6020
Chrome green



6027
Light green



6033
Mint turquoise



6034
Pastel turquoise




3000
Flame red




3002
Carmine red



3003
Ruby red



3005
Wine red



2003
Pastel orange



2008
Bright red orange



1004
Golden yellow




1016
Sulphur yellow




1021
Colza yellow




3015
Light pink




8014
Sepia




8017
Chocolate brown




7026
Granite



1019
Cappuccino




8028
Terra brown



9011
Graphite black


METALLIC



1247M
Bronze metallic



7001M
Silver metallic



9007M
Grey metallic

Please note: When a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

For further information on RAL colours please visit
www.ralcolorchart.com