

SOFTLINE

SERIES



DECO

50 Δ t
(75/65/20°C)

K1



K2



Height mm	Length mm	K1				K2			
		White UIN	Colour UIN	Watts	Btu/hr	White UIN	Colour UIN	Watts	Btu/hr
300	500	84301105	84301105c	235	802	84302205	84302205c	449	1532
	1000	84301110	84301110c	470	1604	84302210	84302210c	898	3064
	1500	84301115	84301115c	705	2405	84302215	84302215c	1347	4596
450	400	84451104	84451104c	272	928	84452204	84452204c	509	1737
	600	84451106	84451106c	409	1396	84452206	84452206c	764	2607
	700	84451107	84451107c	477	1628	84452207	84452207c	891	3040
	800	84451108	84451108c	545	1860	84452208	84452208c	1018	3473
	900	84451109	84451109c	613	2092	84452209	84452209c	1146	3910
	1000	84451110	84451110c	681	2324	84452210	84452210c	1273	4343
	1100	84451111	84451111c	749	2556	84452211	84452211c	1400	4777
	1200	84451112	84451112c	817	2788	84452212	84452212c	1528	5214
	1400	84451114	84451114c	953	3252	84452214	84452214c	1782	6080
	1600	84451116	84451116c	1090	3719	84452216	84452216c	2037	6950
	1800	84451118	84451118c	1226	4183	84452218	84452218c	2291	7817
600	400	84601104	84601104c	348	1187	84602204	84602204c	640	2184
	600	84601106	84601106c	522	1781	84602206	84602206c	961	3279
	700	84601107	84601107c	609	2078	84602207	84602207c	1121	3825
	800	84601108	84601108c	696	2375	84602208	84602208c	1281	4371
	900	84601109	84601109c	783	2672	84602209	84602209c	1441	4917
	1000	84601110	84601110c	870	2968	84602210	84602210c	1601	5463
	1100	84601111	84601111c	957	3265	84602211	84602211c	1761	6009
	1200	84601112	84601112c	1044	3562	84602212	84602212c	1921	6554
	1400	84601114	84601114c	1218	4156	84602214	84602214c	2241	7646
	1600	84601116	84601116c	1392	4750	84602216	84602216c	2562	8742
	1800	84601118	84601118c	1566	5343	84602218	84602218c	2882	9833
	2000	84601120	84601120c	1740	5937	84602220	84602220c	3202	10925

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.


COLOUR OPTIONS




Comes in White as standard (RAL 9016).

Please note that once a coloured radiator has been ordered, it cannot be cancelled or returned.



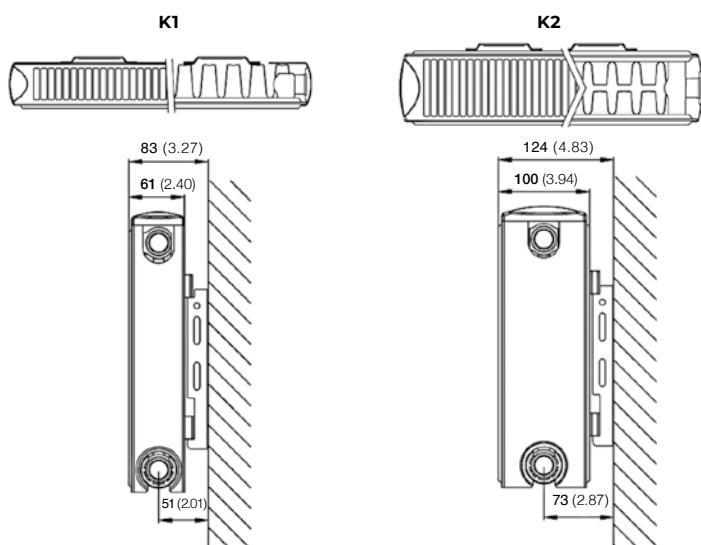

K1 & K2 LUG POSITIONS (New as of June 2016).
All dimensions in mm. Inches in brackets.

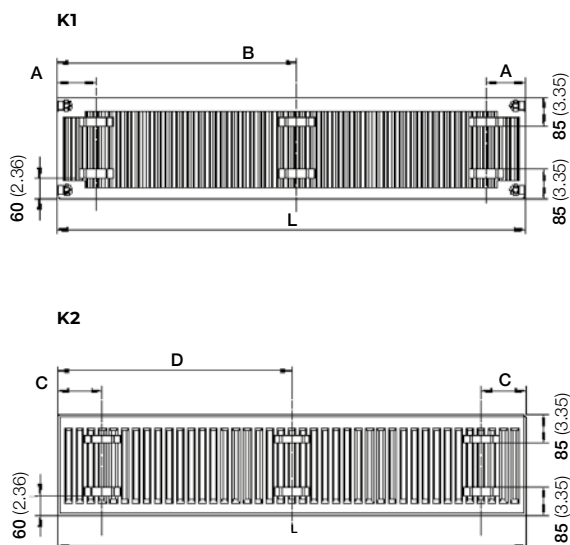


L	K1				K2			
	A		B		C		D	
	mm	in	mm	in	mm	in	mm	in
400	117	4.60	-	-	133	5.24	-	-
500 - 1100	150	5.90	-	-	133	5.24	-	-
1200 - 1600	150	5.90	-	-	133	5.24	-	-
1800 - 2000	150	5.90	(L/2) +17		133	5.24	L/2	

CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.


PIPING OPTIONS

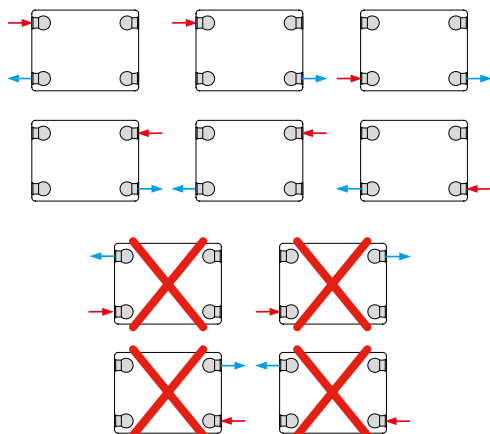

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	K1			K2		
	300	450	600	300	450	600
Height	300	450	600	300	450	600
W/m at 75/65/20	470	681	870	898	1273	1601
n-coefficients	1.26	1.27	1.28	1.30	1.30	1.31
Heated surface area (m ² /m)	2.09	3.37	4.66	3.51	5.62	7.74
Weight (kg/m)	14.13	18.22	24.27	19.30	28.85	38.40
Water contents (l/m)	1.81	2.53	3.23	3.10	4.65	6.20
Wall to tap Centre (mm)	51	51	51	73	73	73

PRESSURE DROPS

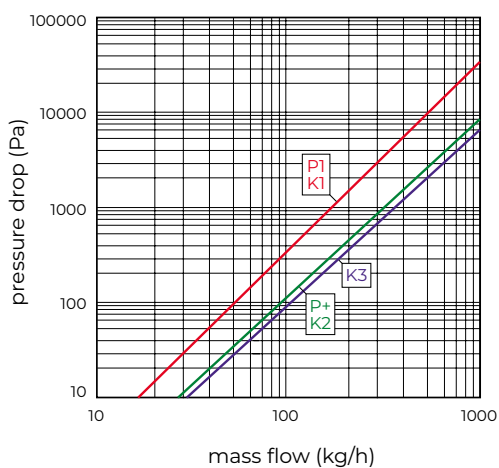

Type	Kv
P1 / K1	1.67
P+ / K2	3.32
K3	3.65

55 COLOUR OPTIONS. 14-DAY LEAD TIME.

Stelrad Radiators are available in white (RAL 9016) as standard, however this radiator is **now available in a variety of colours within 14 working days.**

STANDARD COLOUR




RAL 9016
Traffic white

To request up to 5 colour samples, please email sales@stelrad.com or call **0800 876 6813** with your choices and address details.

The colours shown are reproduced as accurately as this printing process will allow.

RAL COLOURS - Satin Finish



1001
Beige



1013
Oyster white



1015
Light ivory



9001
Cream



9002
Grey white



9003
Signal white



9010
Pure white



9016
Traffic white




9018
Papyrus white




9005
Jet black




9017
Traffic black




7001
Silver grey



7011
Iron grey



7015
Slate grey



7016
Anthacite grey




7030
Stone grey




7032
Pebble grey



7035
Light grey




7036
Platinum grey



7037
Dusty grey



7038
Agate grey




7039
Quartz grey




5002
Ultramarine blue




5010
Gentian blue




5012
Light blue



5014
Pigeon blue



5015
Sky blue




5022
Night blue

Please note: When a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

For further information on RAL colours please visit www.ralcolorchart.com



RAL COLOURS (continued)




5024
Pastel blue




6005
Light moss green



6018
Yellow green



6019
Pastel green




6020
Chrome green



6027
Light green



6033
Mint turquoise



6034
Pastel turquoise



3000
Flame red




3002
Carmine red



3003
Ruby red



3005
Wine red



2003
Pastel orange



2008
Bright red orange



1004
Golden yellow




1016
Sulphur yellow



1021
Colza yellow




3015
Light pink




8014
Sepia




8017
Chocolate brown




7026
Granite



1019
Cappuccino




8028
Terra brown



9011
Graphite black


METALLIC



1247M
Bronze metallic



7001M
Silver metallic



9007M
Grey metallic

Please note: When a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

For further information on RAL colours please visit www.ralcolorchart.com