

# SOFTLINE

SERIES



DECO  
CONCEPT

# SOFTLINE DECO CONCEPT



## 50 $\Delta$ t

(75/65/20°C)

K1



K2



Height mm	Length mm	Stelrad UIN	Heat output		Stelrad UIN	Heat output	
			Watts	Btu/hr		Watts	Btu/hr
<b>600</b>	400	24601104	348	1187	24602204	640	2184
	600	24601106	522	1781	24602206	961	3279
	700	24601107	609	2078	24602207	1121	3825
	800	24601108	696	2375	24602208	1281	4371
	900	24601109	783	2672	24602209	1441	4917
	1000	24601110	870	2968	24602210	1601	5463
	1100	24601111	957	3265	24602211	1761	6009
	1200	24601112	1044	3562	24602212	1921	6554
	1400	24601114	1218	4156	24602214	2241	7646

$\Delta$ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider  $\Delta$ t40 or  $\Delta$ t30 output (see your installer or system designer or download from [www.stelrad.com](http://www.stelrad.com)).

For EN442 data, technical and installation information please visit our website: [www.stelrad.com](http://www.stelrad.com) and search product downloads.




[www.stelrad.com](http://www.stelrad.com)  
Telephone: 0800 876 6813

# SOFTLINE DECO CONCEPT




## WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

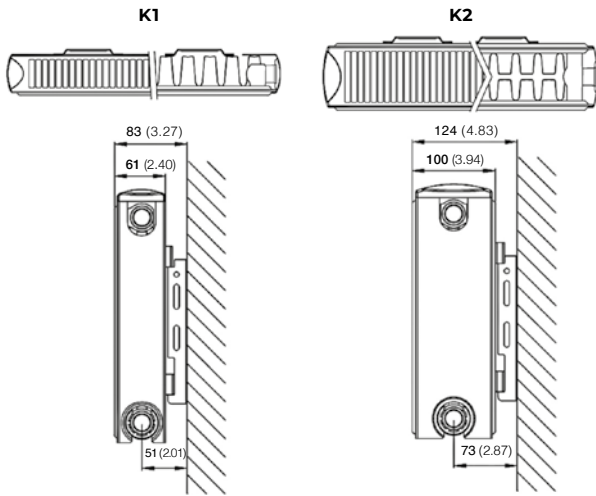

## MOUNTING BRACKETS



All dimensions in mm. Inches in brackets.

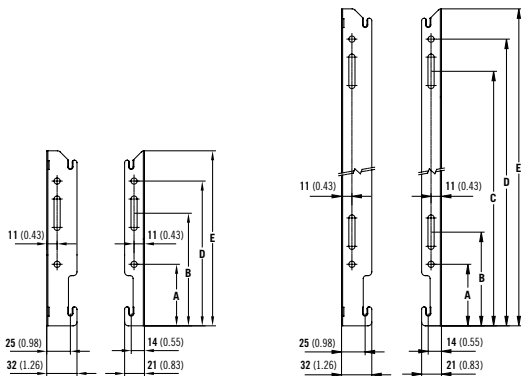

Dimensions	mm	inches
Height	600	23.62
A	65	2.56
B	99	3.90
C	419	16.50
D	453	17.83
E	485	19.09

## K1 & K2 LUG POSITIONS (New as of June 2016).

All dimensions in mm. Inches in brackets.

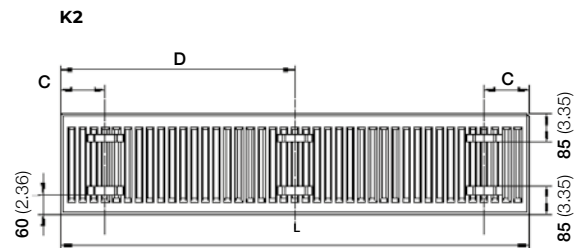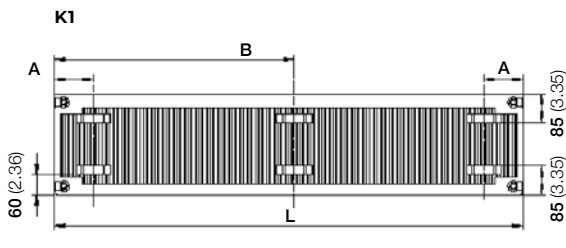


L	K1		K2		mm	in	mm	in
	A	B	C	D				
400	117	4.60	-	-	133	5.24	-	-
500 - 1100	150	5.90	-	-	133	5.24	-	-
1200 - 1600	150	5.90	-	-	133	5.24	-	-
1800 - 2000	150	5.90	(L/2) +17		133	5.24	L/2	

## CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.


## PIPING OPTIONS

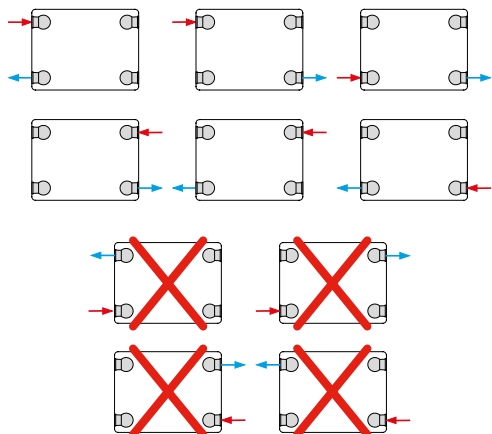

## EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	K1	K2
Height	600	600
W/m at 75/65/20	870	1601
n-coefficients	1.28	1.31
Heated surface area (m <sup>2</sup> /m)	4.66	7.74
Weight (kg/m)	24.27	38.40
Water contents (l/m)	3.23	6.20
Wall to tap Centre (mm)	51	73

## PRESSURE DROPS

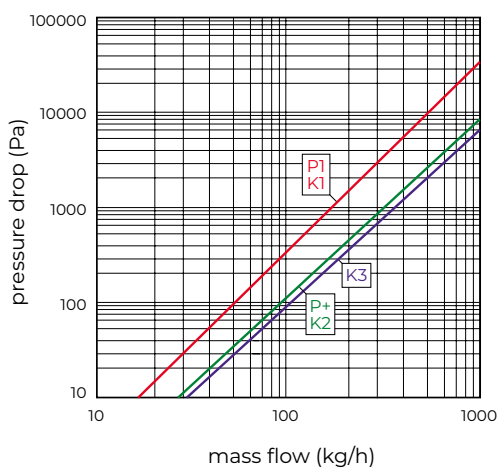

Type	Kv
P1 / K1	1.67
P+ / K2	3.32
K3	3.65