

# KITCHEN & BATHROOM SERIES



CLASSIC  
TOWEL  
RAIL

## 50 $\Delta$ t

(75/65/20°C)


Height mm	Length mm	Max Projection mm	STRAIGHT				STRAIGHT CHROME			
			White UIN	Colour UIN	Heat output Watts	Heat output Btu/hr	Stelrad UIN	Heat output Watts	Heat output Btu/hr	
<b>760</b>	500	100	148070	148070c	376	1282	147002	246	839	
	600	100	148071	148071c	445	1517	147003	294	1003	
<b>1211</b>	500	100	148072	148072c	576	1964	147004	379	1292	
	600	100	148073	148073c	686	2339	147005	453	1545	
<b>1744</b>	500	100	148074	148074c	844	2878	142768	557	1899	
	600	100	148075	148075c	1000	3410	142769	667	2274	

Height mm	Length mm	Max Projection mm	CURVED				CURVED CHROME			
			White UIN	Colour UIN	Heat output Watts	Heat output Btu/hr	Stelrad UIN	Heat output Watts	Heat output Btu/hr	
<b>760</b>	500	100	147006	147006c	376	1282	147012	246	839	
	600	100	147007	147007c	445	1517	147013	294	1003	
<b>1211</b>	500	100	147008	147008c	576	1964	147014	379	1292	
	600	100	147009	147009c	686	2339	147015	453	1545	
<b>1744</b>	500	100	147010	147010c	844	2878	147016	557	1899	
	600	100	147011	147011c	1000	3410	147017	667	2274	

$\Delta$ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider  $\Delta$ t40 or  $\Delta$ t30 output (see your installer or system designer or download from [www.stelradprofessional.com](http://www.stelradprofessional.com)).

For EN442 data, technical and installation information please visit our website: [www.stelradprofessional.com](http://www.stelradprofessional.com) and search product downloads.

### HORIZONTAL TUBE DIMENSION

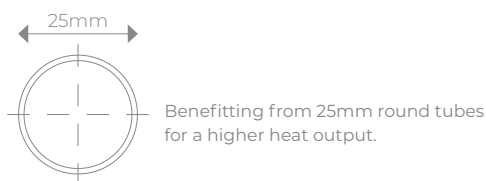


### COLOUR OPTIONS




Comes in White (RAL 9016) and Chrome as standard.

Please note that once a coloured radiator has been ordered, it cannot be cancelled or returned.


### STRAIGHT MODELS

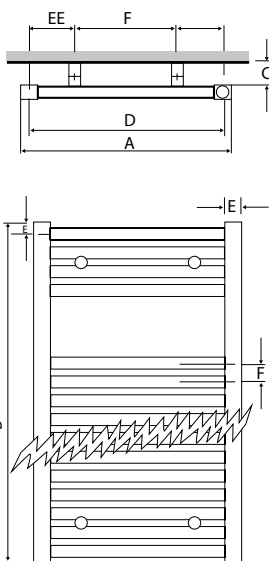

### CURVED MODELS

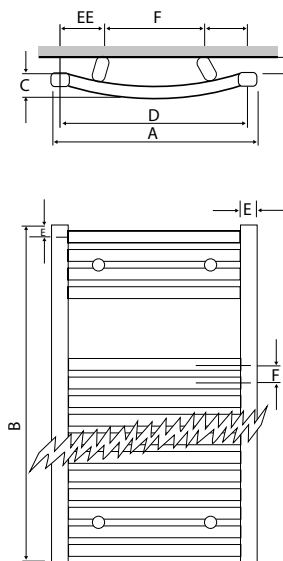

### NUMBER OF TUBES ON TOWEL RAILS

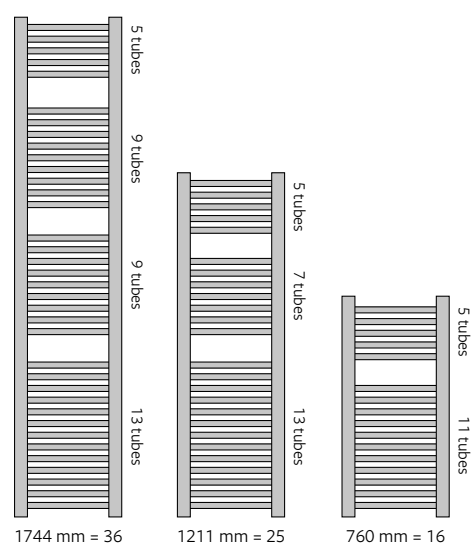


# CLASSIC TOWEL RAIL



		STRAIGHT MODELS					CURVED MODELS				
				WALL MOUNTING POSITIONS					WALL MOUNTING POSITIONS		
A Width (mm)	B Height (mm)	C Depth (mm)	D Tap Centres (mm)	EE (mm)	F (mm)	C (mm)	C Depth (mm)	D Tap Centres (mm)	EE (mm)	F (mm)	C (mm)
400	678	30	356	70	216	65-75	-	-	-	-	-
500	760	30	456	70	316	65-75	56.0	456	110	236	40-45
600	760	30	556	70	416	65-75	60.0	556	110	336	40-45
500	1211	30	456	70	316	65-75	56.0	456	110	236	40-45
600	1211	30	556	70	416	65-75	60.0	556	110	336	40-45
500	1744	30	456	70	316	65-75	56.0	456	110	236	40-45
600	1744	30	556	70	416	65-75	60.0	556	110	336	40-45

## BRACKET POSITIONS



## CONNECTIONS

Each radiator comes with ½" inlet connections as standard.

## EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	STRAIGHT/CURVED WHITE & COLOUR					
No of tubes	16	16	25	25	36	36
Height	760	760	1211	1211	1744	1744
Length	500	600	500	600	500	600
Watts at 75/65/20	376	445	576	686	844	1000
n-coefficients	1.23	1.23	1.25	1.25	1.28	1.26
Heated surface area (m <sup>2</sup> )	0.71	0.83	1.11	1.30	1.60	1.88
Weight (kg)	6.12	7.06	9.63	11.10	13.86	15.98
Water contents (l/m)	4.41	5.10	6.89	7.97	9.80	11.40
KM (P/dTn)	3.0343	3.5743	4.285	5.2327	5.6826	7.1623

Type	STRAIGHT/CURVED CHROME					
No of tubes	16	16	25	25	36	36
Height	760	760	1211	1211	1744	1744
Length	500	600	500	600	500	600
Watts at 75/65/20	246	294	379	453	557	667
n-coefficients	1.25	1.25	1.28	1.27	1.30	1.30
Heated surface area (m <sup>2</sup> )	0.71	0.83	1.11	1.30	1.60	1.88
Weight (kg)	6.12	7.06	9.63	11.10	13.86	15.98
Water contents (l/m)	4.41	5.10	6.89	7.97	9.80	11.40
KM (P/dTn)	1.8179	2.1949	2.5779	3.1188	3.4249	4.1610

# CLASSIC MINI TOWEL RAIL



## 50 $\Delta$ t

(75/65/20°C)


Height mm	Length mm	Max Projection mm	STRAIGHT				STRAIGHT CHROME		
			White UIN	Colour UIN	Heat output Watts	Heat output Btu/hr	Stelrad UIN	Heat output Watts	Heat output Btu/hr
<b>678</b>	400	100	147000	147000c	273	931	147001	175	597

$\Delta$ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider  $\Delta$ t40 or  $\Delta$ t30 output (see your installer or system designer or download from [www.stelradprofessional.com](http://www.stelradprofessional.com)).


For EN442 data, technical and installation information please visit our website: [www.stelradprofessional.com](http://www.stelradprofessional.com) and search product downloads.

### WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

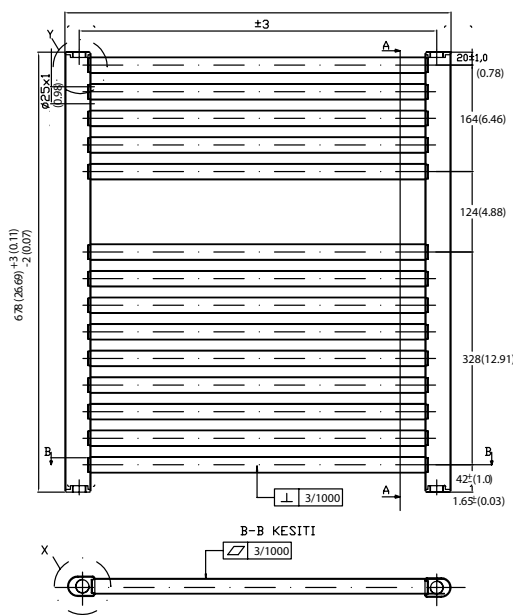

### NUMBER OF TUBES ON TOWEL RAILS



### EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	WHITE	CHROME
No of tubes	14	14
Height	678	678
Length	400	400
Watts at 75/65/20	273	175
n-coefficients	1.2232	1.2535
Heated surface area (m <sup>2</sup> /m)	0.51	0.51
Weight (kg/m)	4.57	4.57
Water contents (l/m)	3.20	3.20
KM (P/dTn)	2.2803	1.2983

### CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.


# 55 COLOUR OPTIONS. 14-DAY LEAD TIME.

Stelrad Radiators are available in white (RAL 9016) as standard, however this radiator is **now available in a variety of colours within 14 working days.**

**STANDARD COLOUR**



**RAL 9016**  
Traffic white



**Chrome**

To request up to 5 colour samples, please email [sales@stelrad.com](mailto:sales@stelrad.com) or call **0800 876 6813** with your choices and address details.

*The colours shown are reproduced as accurately as this printing process will allow.*

**RAL COLOURS - Satin Finish**



**1001**  
Beige



**1013**  
Oyster white



**1015**  
Light ivory



**9001**  
Cream



**9002**  
Grey white



**9003**  
Signal white



**9010**  
Pure white



**9016**  
Traffic white




**9018**  
Papyrus white




**9005**  
Jet black




**9017**  
Traffic black




**7001**  
Silver grey




**7011**  
Iron grey



**7015**  
Slate grey



**7016**  
Anthracite grey




**7030**  
Stone grey




**7032**  
Pebble grey



**7035**  
Light grey




**7036**  
Platinum grey



**7037**  
Dusty grey




**7038**  
Agate grey




**7039**  
Quartz grey




**5002**  
Ultramarine blue




**5010**  
Gentian blue




**5012**  
Light blue



**5014**  
Pigeon blue



**5015**  
Sky blue




**5022**  
Night blue

**Please note:** When a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

For further information on RAL colours please visit [www.ralcolorchart.com](http://www.ralcolorchart.com)



## RAL COLOURS (continued)




**5024**  
Pastel blue




**6005**  
Light moss green



**6018**  
Yellow green




**6019**  
Pastel green




**6020**  
Chrome green



**6027**  
Light green



**6033**  
Mint turquoise



**6034**  
Pastel turquoise




**3000**  
Flame red




**3002**  
Carmine red



**3003**  
Ruby red



**3005**  
Wine red



**2003**  
Pastel orange



**2008**  
Bright red orange



**1004**  
Golden yellow




**1016**  
Sulphur yellow




**1021**  
Colza yellow




**3015**  
Light pink




**8014**  
Sepia




**8017**  
Chocolate brown




**7026**  
Granite



**1019**  
Cappuccino




**8028**  
Terra brown



**9011**  
Graphite black


## METALLIC



**1247M**  
Bronze metallic



**7001M**  
Silver metallic



**9007M**  
Grey metallic

**Please note:** When a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

For further information on RAL colours please visit  
[www.ralcolorchart.com](http://www.ralcolorchart.com)