

VITA

SERIES




DECO

50 Δ t

(75/65/20°C)

K1



K2



Height mm	Length mm	White UIN		Heat output		White UIN		Heat output	
		White UIN	Colour UIN	Watts	Btu/h	White UIN	Colour UIN	Watts	Btu/h
300	500	82301105	82301105c	235	802	82302205	82302205c	449	1532
	1000	82301110	82301110c	469	1601	82302210	82302210c	898	3064
	1500	82301115	82301115c	704	2401	82302215	82302215c	1347	4596
450	400	82451104	82451104c	272	928	82452204	82452204c	509	1737
	600	82451106	82451106c	409	1396	82452206	82452206c	764	2607
	700	82451107	82451107c	477	1628	82452207	82452207c	891	3040
	800	82451108	82451108c	545	1860	82452208	82452208c	1018	3474
	900	82451109	82451109c	613	2092	82452209	82452209c	1146	3910
	1000	82451110	82451110c	681	2324	82452210	82452210c	1273	4344
	1100	82451111	82451111c	749	2556	82452211	82452211c	1400	4779
	1200	82451112	82451112c	817	2788	82452212	82452212c	1528	5214
	1400	82451114	82451114c	953	3252	82452214	82452214c	1782	6080
	1600	82451116	82451116c	1090	3719	82452216	82452216c	2037	6951
	1800	82451118	82451118c	1226	4183	82452218	82452218c	2291	7817
600	400	82601104	82601104c	348	1188	82602204	82602204c	640	2184
	600	82601106	82601106c	522	1782	82602206	82602206c	961	3280
	700	82601107	82601107c	609	2078	82602207	82602207c	1121	3825
	800	82601108	82601108c	696	2375	82602208	82602208c	1281	4372
	900	82601109	82601109c	783	2672	82602209	82602209c	1441	4917
	1000	82601110	82601110c	870	2969	82602210	82602210c	1601	5464
	1100	82601111	82601111c	957	3265	82602211	82602211c	1761	6009
	1200	82601112	82601112c	1044	3563	82602212	82602212c	1921	6556
	1400	82601114	82601114c	1218	4157	82602214	82602214c	2242	7649
	1600	82601116	82601116c	1392	4751	82602216	82602216c	2563	8744
	1800	82601118	82601118c	1566	5345	82602218	82602218c	2883	9836
2000	82601120	82601120c	1740	5939	82602220	82602220c	3203	10928	

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

COLOUR OPTIONS




Comes in White as standard (RAL 9016).

Please note that once a coloured radiator has been ordered, it cannot be cancelled or returned.




WALL MOUNTING AND LUG INFORMATION

All dimensions in mm. Inches in brackets.

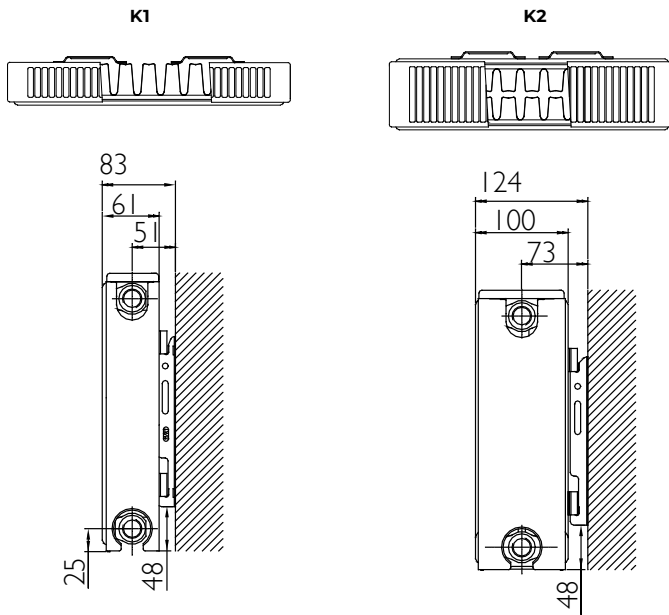

MOUNTING BRACKETS


All dimensions in mm. Inches in brackets. Floor mounting brackets available.

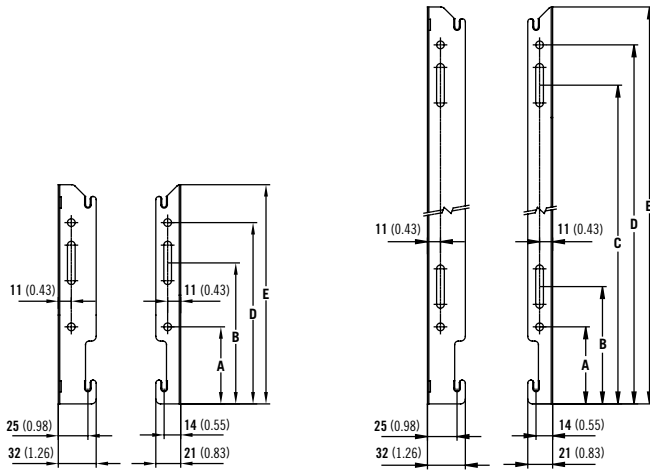

Dimensions	mm	inches	mm	inches	mm	inches
Height	300	11.81	450	17.72	600	23.62
A	65	2.56	65	2.56	65	2.56
B	119	4.69	99	3.90	99	3.90
C	-	-	269	10.59	419	16.50
D	153	6.02	303	11.93	453	17.83
E	185	7.28	335	13.19	485	19.09

K1 & K2 LUG POSITIONS (New as of June 2016).

All dimensions in mm. Inches in brackets.

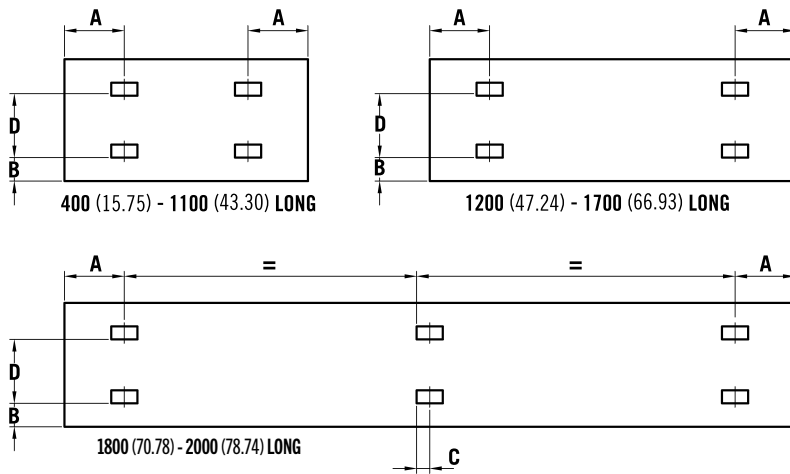

PANEL HEIGHT

D		D	
mm	in	mm	in
300	11.81	155	6.10
450	17.72	305	12.01
600	23.62	455	17.91
700	27.56	555	21.95

K1

K2


Dimensions	mm	in	mm	in
A 400mm	117	4.61	133	5.24
A 500 - 2000mm	150	5.91	133	5.24
B 400 - 2000mm	60	2.36	60	2.36
C 1800 - 2000mm	17	0.67	L/2	L/2

L/2 is the length divided by two.

CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.


PIPING OPTIONS

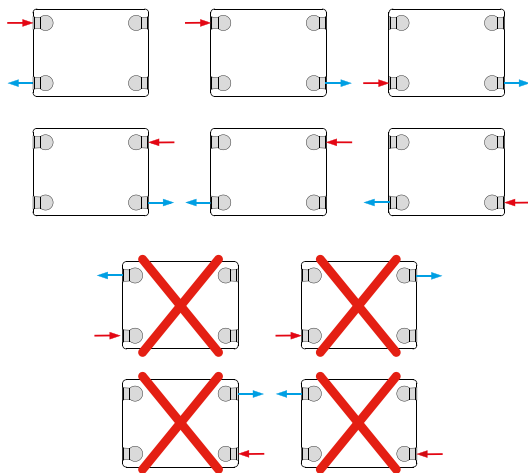

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	K1			K2		
	300	450	600	300	450	600
Height	300	450	600	300	450	600
W/m at 75/65/20	469	701	911	929	1296	1634
n-coefficients	1.30	1.29	1.28	1.30	1.31	1.32
Heated surface area (m ² /m)	2.09	3.37	4.66	3.51	5.62	7.74
Weight (kg/m)	11.88	18.26	24.65	19.60	29.80	40.00
Water contents (l/m)	1.89	2.49	3.25	3.70	5.05	6.60
Wall to tap centre (mm)	51	51	51	73	73	73

PRESSURE DROPS

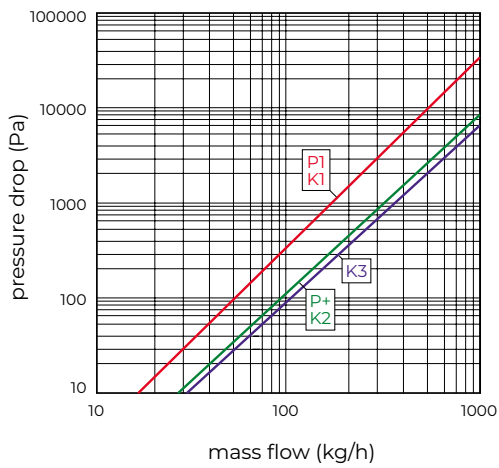

Type	Kv
P1 / K1	1.67
P+ / K2	3.32
K3	3.65

55 COLOUR OPTIONS. 14-DAY LEAD TIME.

Stelrad Radiators are available in white (RAL 9016) as standard, however this radiator is **now available in a variety of colours within 14 working days.**

STANDARD COLOUR




RAL 9016
Traffic white

To request up to 5 colour samples, please email sales@stelrad.com or call **0800 876 6813** with your choices and address details.

The colours shown are reproduced as accurately as this printing process will allow.

RAL COLOURS - Satin Finish



1001
Beige



1013
Oyster white



1015
Light ivory



9001
Cream



9002
Grey white



9003
Signal white



9010
Pure white



9016
Traffic white




9018
Papyrus white




9005
Jet black




9017
Traffic black




7001
Silver grey




7011
Iron grey



7015
Slate grey



7016
Anthacite grey




7030
Stone grey




7032
Pebble grey




7035
Light grey




7036
Platinum grey



7037
Dusty grey



7038
Agate grey




7039
Quartz grey




5002
Ultramarine blue




5010
Gentian blue




5012
Light blue



5014
Pigeon blue



5015
Sky blue




5022
Night blue

Please note: When a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

For further information on RAL colours please visit www.ralcolorchart.com




RAL COLOURS (continued)




5024
Pastel blue



6005
Light moss green



6018
Yellow green




6019
Pastel green




6020
Chrome green



6027
Light green



6033
Mint turquoise



6034
Pastel turquoise



3000
Flame red




3002
Carmine red



3003
Ruby red



3005
Wine red



2003
Pastel orange



2008
Bright red orange



1004
Golden yellow




1016
Sulphur yellow



1021
Colza yellow




3015
Light pink




8014
Sepia




8017
Chocolate brown




7026
Granite



1019
Cappuccino




8028
Terra brown



9011
Graphite black


METALLIC



1247M
Bronze metallic



7001M
Silver metallic



9007M
Grey metallic

Please note: When a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

For further information on RAL colours please visit
www.ralcolorchart.com