

DESIGNER

SERIES




**CONCORD
PLANE**


50 Δ t

(75/65/20°C)

SINGLE



DOUBLE



Height mm	Length mm	Elements	SINGLE				DOUBLE			
			White UIN	Colour UIN	Watts	Heat output Btu/hr	White UIN	Colour UIN	Watts	Heat output Btu/hr
444	500	6	148346	148346c	392	1338	148397	148397c	678	2313
	600	6	148347	148347c	470	1604	148398	148398c	814	2777
	700	6	148348	148348c	549	1873	148399	148399c	949	3238
	800	6	148349	148349c	627	2139	148400	148400c	1085	3702
	900	6	148350	148350c	706	2409	148401	148401c	1220	4163
	1000	6	148351	148351c	784	2675	148402	148402c	1356	4627
	1100	6	148352	148352c	862	2941	148403	148403c	1492	5091
	1200	6	148353	148353c	941	3211	148404	148404c	1627	5552
	1400	6	148354	148354c	1098	3747	148405	148405c	1898	6476
	1600	6	148355	148355c	1254	4279	148406	148406c	2170	7404
	1800	6	148356	148356c	1411	4815	148407	148407c	2441	8329
	2000	6	148357	148357c	1568	5350	148408	148408c	2712	9254
	2200*	6	148358	148358c	1725	5886	148409	148409c	2983	10178
	2400*	6	148359	148359c	1882	6422	148410	148410c	3254	11103
	2600*	6	148360	148360c	2038	6954	148411	148411c	3526	12031
	2800*	6	148361	148361c	2195	7490	148412	148412c	3797	12956
	3000*	6	148362	148362c	2352	8025	148413	148413c	4068	13881
	592	500	8	148363	148363c	501	1709	148414	148414c	849
600		8	148364	148364c	601	2051	148415	148415c	1018	3474
700		8	148365	148365c	701	2392	148416	148416c	1188	4054
800		8	148366	148366c	802	2737	148417	148417c	1358	4634
900		8	148367	148367c	902	3078	148418	148418c	1527	5210
1000		8	148368	148368c	1002	3419	148419	148419c	1697	5790
1100		8	148369	148369c	1102	3760	148420	148420c	1867	6370
1200		8	148370	148370c	1202	4101	148421	148421c	2036	6947
1400		8	148371	148371c	1403	4787	148422	148422c	2376	8107
1600		8	148372	148372c	1603	5470	148423	148423c	2715	9264
1800		8	148373	148373c	1804	6156	148424	148424c	3055	10424
2000		8	148374	148374c	2004	6838	148425	148425c	3394	11581
2200*		8	148375	148375c	2204	7520	148426	148426c	3733	12738
2400*		8	148376	148376c	2405	8206	148427	148427c	4073	13898
2600*		8	148377	148377c	2605	8889	148428	148428c	4412	15054
2800*		8	148378	148378c	2806	9574	148429	148429c	4752	16214
3000*		8	148379	148379c	3006	10257	148430	148430c	5091	17371
740		500	10	148380	148380c	598	2040	148431	148431c	1001
	600	10	148381	148381c	718	2450	148432	148432c	1201	4098
	700	10	148382	148382c	837	2856	148433	148433c	1401	4780
	800	10	148383	148383c	957	3265	148434	148434c	1602	5466
	900	10	148384	148384c	1076	3671	148435	148435c	1802	6149
	1000	10	148385	148385c	1196	4081	148436	148436c	2002	6831
	1100	10	148386	148386c	1316	4490	148437	148437c	2202	7514
	1200	10	148387	148387c	1435	4896	148438	148438c	2402	8196
	1400	10	148388	148388c	1674	5712	148439	148439c	2803	9564
	1600	10	148389	148389c	1914	6531	148440	148440c	3203	10929
	1800	10	148390	148390c	2153	7346	148441	148441c	3604	12297
	2000	10	148391	148391c	2392	8162	148442	148442c	4004	13662
	2200*	10	148392	148392c	2631	8977	148443	148443c	4404	15027
	2400*	10	148393	148393c	2870	9793	148444	148444c	4805	16395
	2600*	10	148394	148394c	3110	10612	148445	148445c	5205	17760
	2800*	10	148395	148395c	3349	11427	148446	148446c	5606	19128
	3000*	10	148396	148396c	3588	12243	148447	148447c	6006	20493

Δt_{50} is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt_{40} or Δt_{30} output (see your installer or system designer or download from www.stelradprofessional.com).

For EN442 data, technical and installation information please visit our website: www.stelradprofessional.com and search product downloads.

COLOUR OPTIONS

Comes in White as standard (RAL 9016).

Colour radiators have a lead time of up to 8 weeks for configurable options, and a 14-day lead time for nonconfigurable products (from order to delivery).

Please note that once a coloured radiator has been ordered, it cannot be cancelled or returned.

* For coloured options over 2200mm in length, please contact Customer Services to discuss the lead time



CONCORD PLANE




SINGLE, CONCORD PLANE DOUBLE WALL MOUNTING INFORMATION

All dimensions in mm.

Type	From back of radiator to wall		From wall to centre of connections		From front of radiator to wall	
	mm	inches	mm	inches	mm	inches
Plane Single	11	0.43	43	2.24	71	2.79
Plane Double	25	0.98	97	3.81	125	4.92

FLOOR MOUNTING POSITIONS

All dimensions in mm. Inches in brackets. Must be specified at time of ordering as they are securely welded during manufacture.

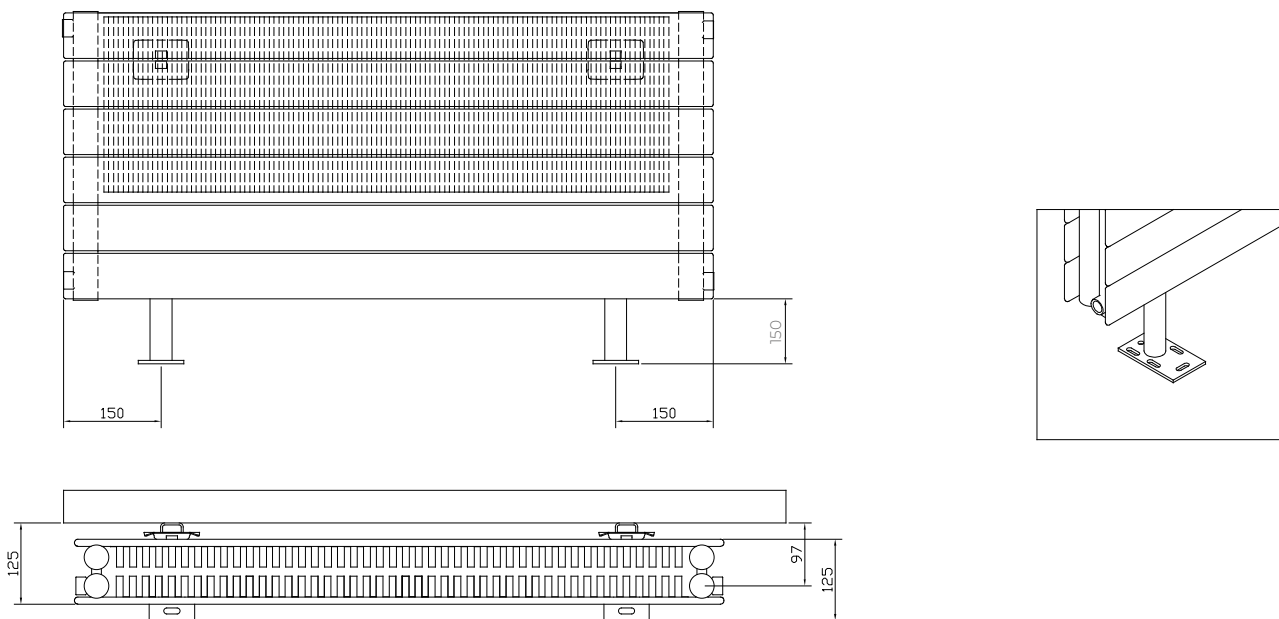


CONCORD PLANE




SINGLE FIXING POSITIONS



All dimensions in mm.

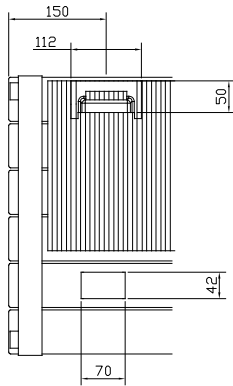

4 Lugs 0.5m to 1.9m



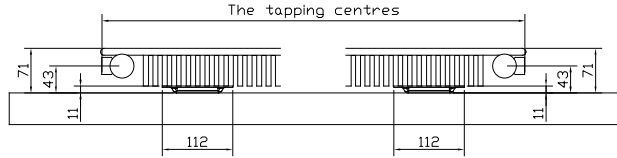


6 Lugs 2.0m to 3.0m

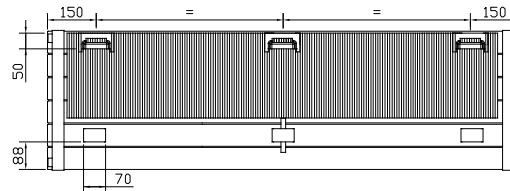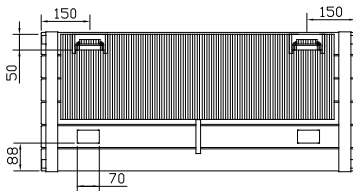


DOUBLE FIXING POSITIONS

All dimensions in mm.

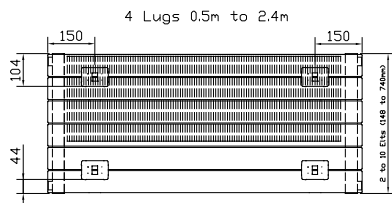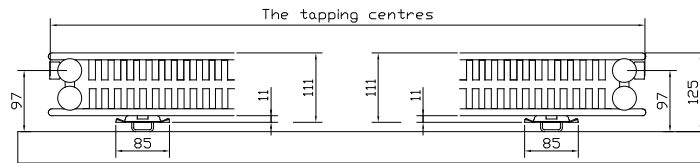

4 Lugs 0.5m to 2.4m

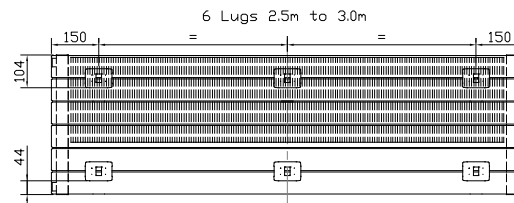


6 Lugs 2.5m to 3.0m

CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.

PIPING INSTRUCTIONS

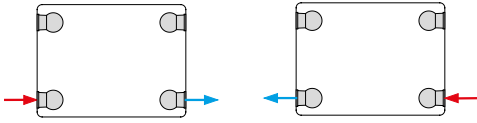

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	Plane - Single			Plane - Double		
	444	592	740	444	592	740
Height	444	592	740	444	592	740
W/m at 75/65/20	784	1002	1196	1356	1697	2002
n-coefficients	1.24	1.24	1.25	1.27	1.31	1.32
Heated surface area (m ² /m)	2.46	2.57	3.34	2.56	3.54	4.53
Weight (kg/m)	17.83	21.15	27.01	28.82	39.84	50.87
Water contents (l/m)	3.67	4.89	6.12	7.34	9.79	12.24
Wall to tap centre (mm)	43	43	43	97	97	97

55 COLOUR OPTIONS. 14-DAY LEAD TIME.

Stelrad Radiators are available in white (RAL 9016) as standard, however this radiator is **now available in a variety of colours within 14 working days.**

STANDARD COLOUR



RAL 9016
Traffic white

To request up to 5 colour samples, please email sales@stelrad.com or call **0800 876 6813** with your choices and address details.

The colours shown are reproduced as accurately as this printing process will allow.

RAL COLOURS - Satin Finish



1001
Beige



1013
Oyster white



1015
Light ivory



9001
Cream



9002
Grey white



9003
Signal white



9010
Pure white



9016
Traffic white




9018
Papyrus white




9005
Jet black




9017
Traffic black




7001
Silver grey



7011
Iron grey



7015
Slate grey



7016
Anthracite grey




7030
Stone grey




7032
Pebble grey



7035
Light grey




7036
Platinum grey



7037
Dusty grey



7038
Agate grey




7039
Quartz grey




5002
Ultramarine blue



5010
Gentian blue




5012
Light blue



5014
Pigeon blue



5015
Sky blue




5022
Night blue

Please note: When a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

For further information on RAL colours please visit www.ralcolorchart.com




RAL COLOURS (continued)




5024
Pastel blue



6005
Light moss green



6018
Yellow green




6019
Pastel green




6020
Chrome green



6027
Light green



6033
Mint turquoise



6034
Pastel turquoise



3000
Flame red




3002
Carmine red



3003
Ruby red



3005
Wine red



2003
Pastel orange



2008
Bright red orange



1004
Golden yellow




1016
Sulphur yellow



1021
Colza yellow




3015
Light pink




8014
Sepia




8017
Chocolate brown




7026
Granite



1019
Cappuccino




8028
Terra brown



9011
Graphite black


METALLIC



1247M
Bronze metallic



7001M
Silver metallic



9007M
Grey metallic

Please note: When a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

For further information on RAL colours please visit www.ralcolorchart.com