

VITA

SERIES



CONCORD
PLANE

50 Δ t

(75/65/20°C)



Height mm	Length mm	Elements	White UIN	Colour UIN	Heat output Watts Btu/hr		White UIN	Colour UIN	Heat output Watts Btu/hr	
444	500	6	448346	448346c	392	1338	448397	448397c	685	2337
	600	6	448347	448347c	470	1604	448398	448398c	821	2801
	700	6	448348	448348c	549	1873	448399	448399c	958	3269
	800	6	448349	448349c	627	2139	448400	448400c	1095	3736
	900	6	448350	448350c	706	2409	448401	448401c	1232	4204
	1000	6	448351	448351c	784	2675	448402	448402c	1369	4671
	1100	6	448352	448352c	862	2941	448403	448403c	1506	5139
	1200	6	448353	448353c	941	3211	448404	448404c	1643	5606
	1400	6	448354	448354c	1098	3747	448405	448405c	1917	6541
592	500	8	448363	448363c	501	1709	448414	448414c	849	2897
	600	8	448364	448364c	601	2051	448415	448415c	1018	3474
	700	8	448365	448365c	701	2392	448416	448416c	1188	4054
	800	8	448366	448366c	802	2737	448417	448417c	1358	4634
	900	8	448367	448367c	902	3078	448418	448418c	1527	5210
	1000	8	448368	448368c	1002	3419	448419	448419c	1697	5790
	1100	8	448369	448369c	1102	3760	448420	448420c	1867	6370
	1200	8	448370	448370c	1202	4101	448421	448421c	2036	6947
	1400	8	448371	448371c	1403	4787	448422	448422c	2376	8107

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelradprofessional.com).

For EN442 data, technical and installation information please visit our website: www.stelradprofessional.com and search product downloads.

COLOUR OPTIONS

Comes in White as standard (RAL 9016).

Please note that once a coloured radiator has been ordered, it cannot be cancelled or returned.



www.stelradprofessional.com

Telephone: 0800 876 6813

CONCORD PLANE




CONCORD PLANE SINGLE & DOUBLE WALL MOUNTING INFORMATION

All dimensions in mm.


Type	From back of radiator to wall		From wall to centre of connections		From front of radiator to wall	
	mm	inches	mm	inches	mm	inches
Plane Single	11	0.43	43	1.69	85	3.35
Plane Double	25	0.98	97	3.81	125	4.92

SINGLE FIXING POSITIONS



All dimensions in mm. Inches in brackets.

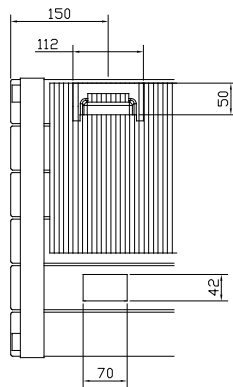

4 Lugs 0.5m to 1.9m




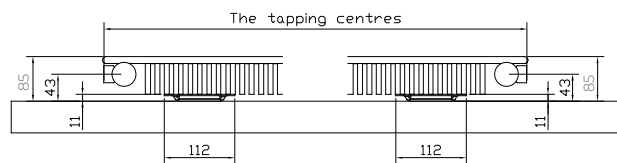


6 Lugs 2.0m to 3.0m

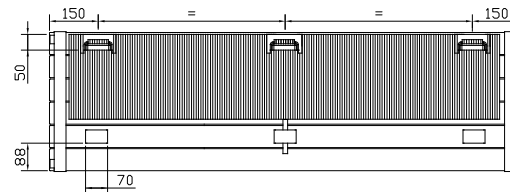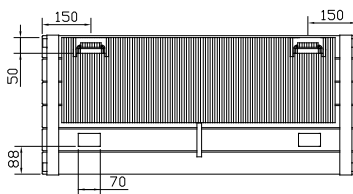

DOUBLE FIXING POSITIONS


All dimensions in mm. Inches in brackets.

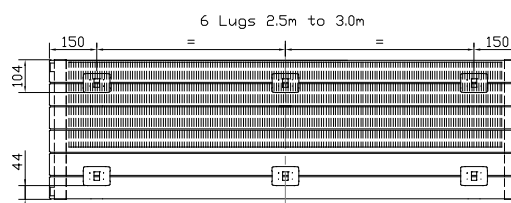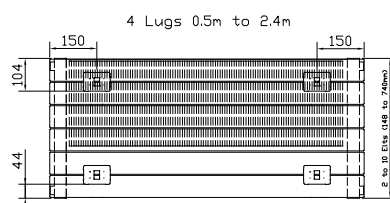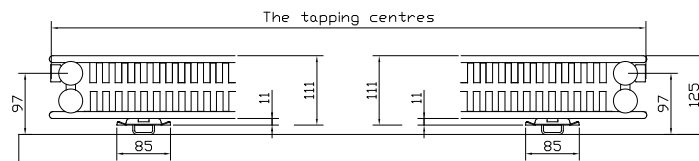

CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.


PIPING INSTRUCTIONS




EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	Plane - Single			Plane - Double		
Height	444	592	740	444	592	740
W/m at 75/65/20	784	1002	1196	1369	1697	2002
n-coefficients	1.24	1.24	1.24	1.28	1.30	1.32
Heated surface area (m ² /m)	4.97	6.67	7.02	7.82	10.52	11.22
Weight (kg/m)	117.10	20.50	25.70	27.90	37.50	47.50
Water contents (l/m)	4.10	5.40	7.00	8.00	10.80	13.60
Wall to tap centre (mm)	43	43	43	98	98	98

PRESSURE DROPS

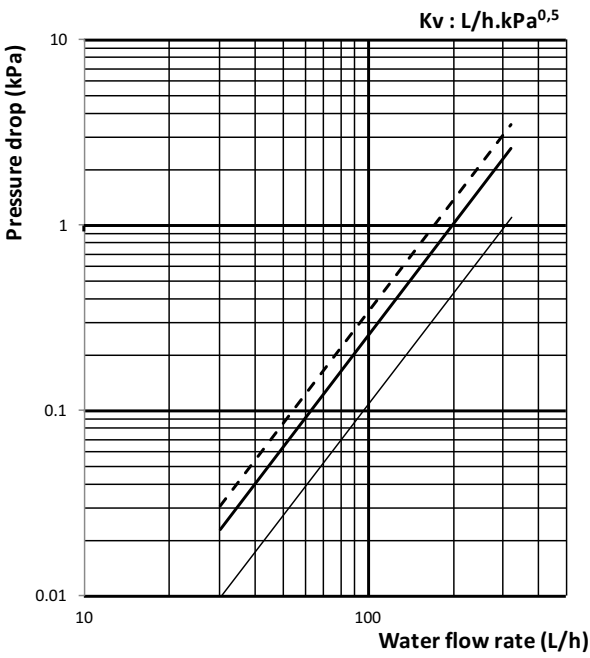

--- Single plane 740 - Kv=199
— Single plane 592 - Kv=172
— Single plane 444 - Kv=305

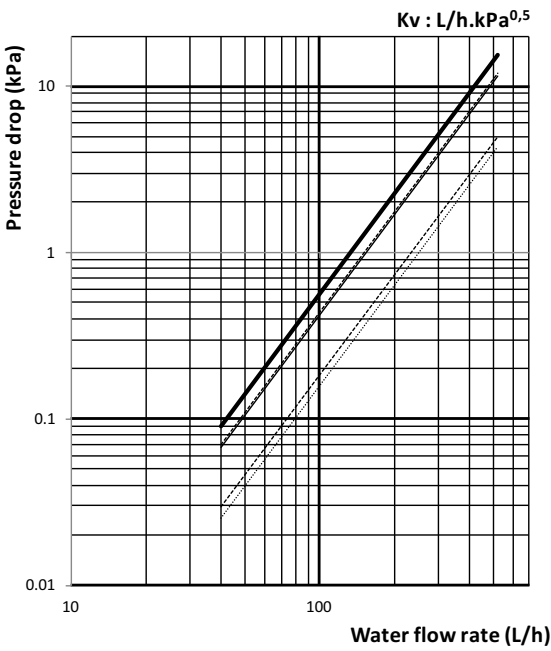

..... Double plane 444 - Kv=151
..... Double plane 592 - Kv=233
..... Double plane 740 - Kv=250

55 COLOUR OPTIONS. 14-DAY LEAD TIME.

Stelrad Radiators are available in white (RAL 9016) as standard, however this radiator is **now available in a variety of colours within 14 days.**

STANDARD COLOUR



RAL 9016
Traffic white

To request up to 5 colour samples, please email sales@stelrad.com or call **0800 876 6813** with your choices and address details.

The colours shown are reproduced as accurately as this printing process will allow.

RAL COLOURS



1001
Beige



1013
Oyster white



1015
Light ivory



9001
Cream



9002
Grey white



9003
Signal white



9010
Pure white




9016
Traffic white




9018
Papyrus white




9005
Jet black



9017
Traffic black




7001
Silver grey




7011
Iron grey



7015
Slate grey



7016
Anthracite grey




7030
Stone grey




7032
Pebble grey



7035
Light grey




7036
Platinum grey



7037
Dusty grey



7038
Agate grey




7039
Quartz grey




5002
Ultramarine blue



5010
Gentian blue




5012
Light blue



5014
Pigeon blue



5015
Sky blue



5022
Night blue

Please note: When a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

For further information on RAL colours please visit
www.ralcolorchart.com

55 COLOUR OPTIONS. 14-DAY LEAD TIME.

Stelrad Radiators are available in white (RAL 9016) as standard, however this radiator is **now available in a variety of colours within 14 days.**

STANDARD COLOUR



RAL 9016
Traffic white

To request up to 5 colour samples, please email sales@stelrad.com or call **0800 876 6813** with your choices and address details.

The colours shown are reproduced as accurately as this printing process will allow.

RAL COLOURS



1001
Beige



1013
Oyster white



1015
Light ivory



9001
Cream



9002
Grey white



9003
Signal white



9010
Pure white




9016
Traffic white




9018
Papyrus white




9005
Jet black



9017
Traffic black




7001
Silver grey




7011
Iron grey



7015
Slate grey



7016
Anthracite grey




7030
Stone grey




7032
Pebble grey



7035
Light grey




7036
Platinum grey



7037
Dusty grey



7038
Agate grey




7039
Quartz grey




5002
Ultramarine blue



5010
Gentian blue




5012
Light blue



5014
Pigeon blue



5015
Sky blue



5022
Night blue

Please note: When a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

For further information on RAL colours please visit www.ralcolorchart.com