


SOFTLINE

SERIES

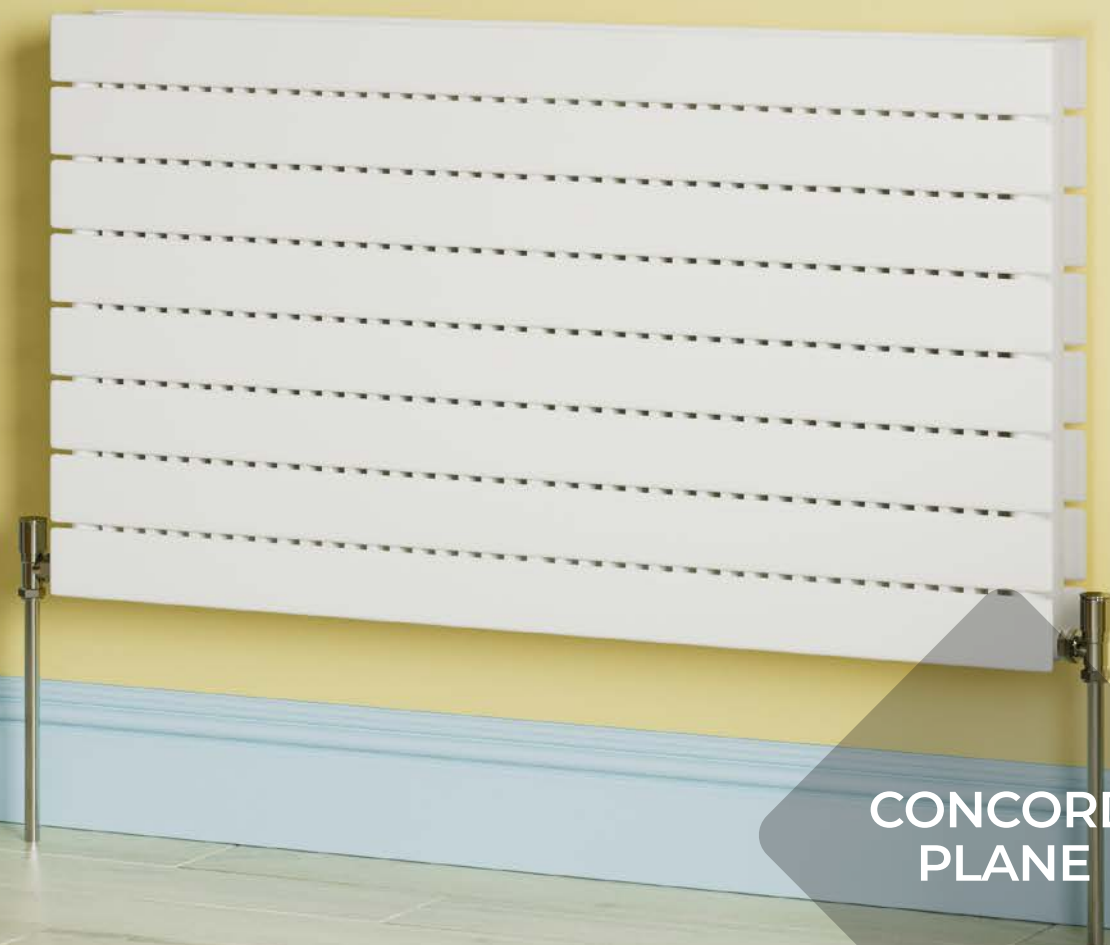

CONCORD
PLANE

50 Δ t

(75/65/20°C)

SINGLE



DOUBLE



Height mm	Length mm	Elements	White UIN	Colour UIN	Heat output Watts Btu/hr		White UIN	Colour UIN	Heat output Watts Btu/hr	
444	500	6	548346	548346c	392	1338	548397	548397c	678	2313
	600	6	548347	548347c	470	1604	548398	548398c	814	2777
	700	6	548348	548348c	549	1873	548399	548399c	949	3238
	800	6	548349	548349c	627	2139	548400	548400c	1085	3702
	900	6	548350	548350c	706	2409	548401	548401c	1220	4163
	1000	6	548351	548351c	784	2675	548402	548402c	1356	4627
	1100	6	548352	548352c	862	2941	548403	548403c	1492	5091
	1200	6	548353	548353c	941	3211	548404	548404c	1627	5552
	1400	6	548354	548354c	1098	3747	548405	548405c	1898	6476
592	500	8	548363	548363c	501	1709	548414	548414c	849	2897
	600	8	548364	548364c	601	2051	548415	548415c	1018	3474
	700	8	548365	548365c	701	2392	548416	548416c	1188	4054
	800	8	548366	548366c	802	2737	548417	548417c	1358	4634
	900	8	548367	548367c	902	3078	548418	548418c	1527	5210
	1000	8	548368	548368c	1002	3419	548419	548419c	1697	5790
	1100	8	548369	548369c	1102	3760	548420	548420c	1867	6370
	1200	8	548370	548370c	1202	4101	548421	548421c	2036	6947
	1400	8	548371	548371c	1403	4787	548422	548422c	2376	8107

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelradprofessional.com).

For EN442 data, technical and installation information please visit our website: www.stelradprofessional.com and search product downloads.

COLOUR OPTIONS

Comes in White as standard (RAL 9016).

Please note that once a coloured radiator has been ordered, it cannot be cancelled or returned.



www.stelradprofessional.com

Telephone: 0800 876 6813

CONCORD PLANE




CONCORD PLANE SINGLE & DOUBLE WALL MOUNTING INFORMATION

All dimensions in mm.


Type	From back of radiator to wall		From wall to centre of connections		From front of radiator to wall	
	mm	inches	mm	inches	mm	inches
Plane Single	11	0.43	43	1.69	71	2.80
Plane Double	25	0.98	97	3.81	125	4.92

SINGLE FIXING POSITIONS



All dimensions in mm.

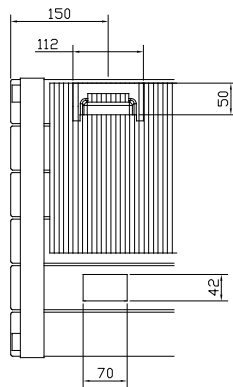

4 Lugs 0.5m to 1.9m



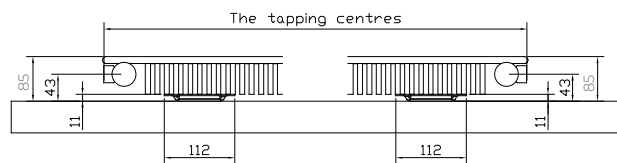


6 Lugs 2.0m to 3.0m

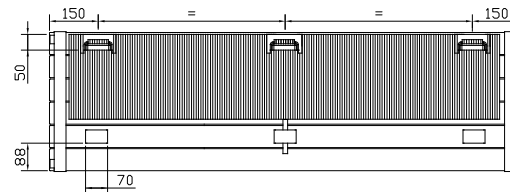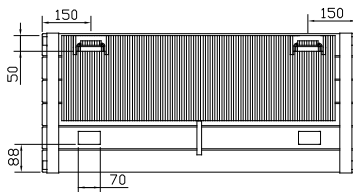


DOUBLE FIXING POSITIONS

All dimensions in mm.

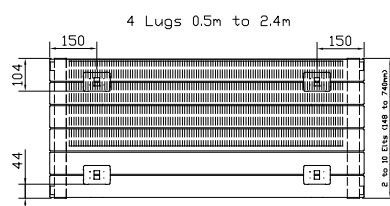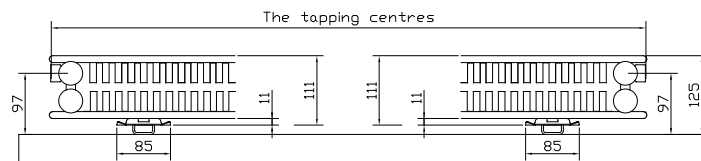

4 Lugs 0.5m to 2.4m

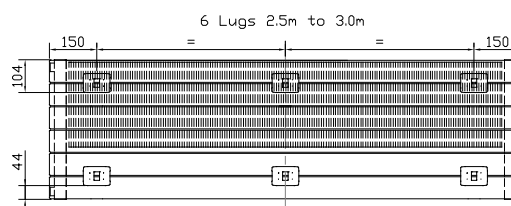


6 Lugs 2.5m to 3.0m

CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.

PIPING INSTRUCTIONS



EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	Plane - Single			Plane - Double		
Height	444	592	740	444	592	740
W/m at 75/65/20	784	1002	1196	1356	1697	2002
n-coefficients	1.24	1.24	1.25	1.27	1.31	1.32
Heated surface area (m ² /m)	2.46	2.57	3.34	2.56	3.54	4.53
Weight (kg/m)	17.83	21.15	27.04	28.82	39.84	50.87
Water contents (l/m)	3.67	4.89	6.12	7.34	9.79	12.24
Wall to tap centre (mm)	43	43	43	97	97	97

55 COLOUR OPTIONS. 14-DAY LEAD TIME.

Stelrad Radiators are available in white (RAL 9016) as standard, however this radiator is **now available in a variety of colours within 14 working days.**

STANDARD COLOUR




RAL 9016
Traffic white

To request up to 5 colour samples, please email sales@stelrad.com or call **0800 876 6813** with your choices and address details.

The colours shown are reproduced as accurately as this printing process will allow.


RAL COLOURS - Satin Finish



1001
Beige



1013
Oyster white



1015
Light ivory



9001
Cream



9002
Grey white




9003
Signal white




9010
Pure white



9016
Traffic white




9018
Papyrus white




9005
Jet black



9017
Traffic black



7001
Silver grey




7011
Iron grey




7015
Slate grey



7016
Anthacite grey




7030
Stone grey




7032
Pebble grey




7035
Light grey




7036
Platinum grey



7037
Dusty grey



7038
Agate grey



7039
Quartz grey




5002
Ultramarine blue




5010
Gentian blue




5012
Light blue



5014
Pigeon blue




5015
Sky blue




5022
Night blue



RAL COLOURS (continued)




5024
Pastel blue




6005
Light moss green




6018
Yellow green




6019
Pastel green




6020
Chrome green



6027
Light green



6033
Mint turquoise



6034
Pastel turquoise




3000
Flame red



3002
Carmine red



3003
Ruby red



3005
Wine red



2003
Pastel orange



2008
Bright red orange



1004
Golden yellow




1016
Sulphur yellow




1021
Colza yellow




3015
Light pink




8014
Sepia



8017
Chocolate brown



7026
Granite



1019
Cappuccino




8028
Terra brown




9011
Graphite black


METALLIC



1247M
Bronze metallic



7001M
Silver metallic



9007M
Grey metallic

Please note: When a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

For further information on RAL colours please visit
www.ralcolorchart.com