

KITCHEN & BATHROOM SERIES



**CLASSIC
TOWEL
RAIL**

50 Δ t

(75/65/20°C)

STRAIGHT

STRAIGHT CHROME

Height mm	Length mm	Max Projection mm	White UIN	Colour UIN	Heat output Watts	Heat output Btu/hr	Stelrad UIN	Heat output Watts	Heat output Btu/hr
760	500	100	148070	148070c	376	1282	147002	246	839
	600	100	148071	148071c	445	1517	147003	294	1003
1211	500	100	148072	148072c	576	1964	147004	379	1292
	600	100	148073	148073c	686	2339	147005	453	1545
1744	500	100	148074	148074c	844	2878	142768	557	1899
	600	100	148075	148075c	1000	3410	142769	667	2274

CURVED


CURVED CHROME

Height mm	Length mm	Max Projection mm	White UIN	Colour UIN	Heat output Watts	Heat output Btu/hr	Stelrad UIN	Heat output Watts	Heat output Btu/hr
760	500	100	147006	147006c	376	1282	147012	246	839
	600	100	147007	147007c	445	1517	147013	294	1003
1211	500	100	147008	147008c	576	1964	147014	379	1292
	600	100	147009	147009c	686	2339	147015	453	1545
1744	500	100	147010	147010c	844	2878	147016	557	1899
	600	100	147011	147011c	1000	3410	147017	667	2274

Δt_{50} is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt_{40} or Δt_{30} output (see your installer or system designer or download from www.stelradprofessional.com).

For EN442 data, technical and installation information please visit our website: www.stelradprofessional.com and search product downloads.

HORIZONTAL TUBE DIMENSION

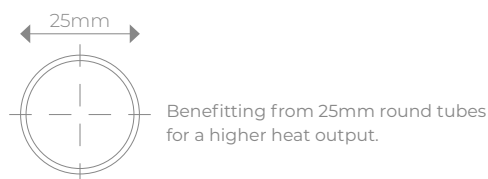

COLOUR OPTIONS






Comes in White (RAL 9016) and Chrome as standard.

Please note that once a coloured radiator has been ordered, it cannot be cancelled or returned.

STRAIGHT MODELS

CURVED MODELS

NUMBER OF TUBES ON TOWEL RAILS

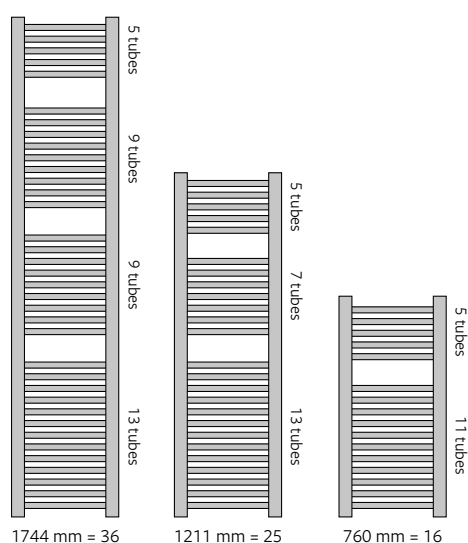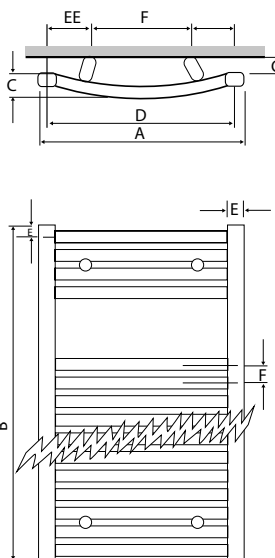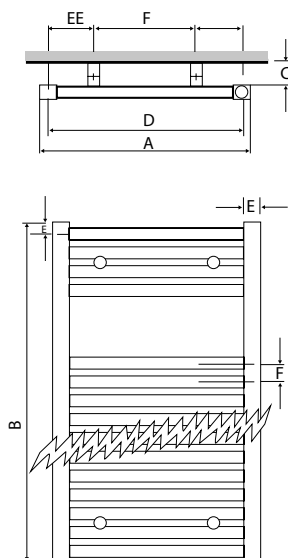


CLASSIC TOWEL RAIL



		STRAIGHT MODELS					CURVED MODELS				
				WALL MOUNTING POSITIONS					WALL MOUNTING POSITIONS		
A Width (mm)	B Height (mm)	C Depth (mm)	D Tap Centres (mm)	EE (mm)	F (mm)	C (mm)	C Depth (mm)	D Tap Centres (mm)	EE (mm)	F (mm)	C (mm)
400	678	30	356	70	216	65-75	-	-	-	-	-
500	760	30	456	70	316	65-75	56.0	456	110	236	40-45
600	760	30	556	70	416	65-75	60.0	556	110	336	40-45
500	1211	30	456	70	316	65-75	56.0	456	110	236	40-45
600	1211	30	556	70	416	65-75	60.0	556	110	336	40-45
500	1744	30	456	70	316	65-75	56.0	456	110	236	40-45
600	1744	30	556	70	416	65-75	60.0	556	110	336	40-45

BRACKET POSITIONS



CONNECTIONS

Each radiator comes with ½" inlet connections as standard.

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	STRAIGHT/CURVED WHITE & COLOUR					
No of tubes	16	16	25	25	36	36
Height	760	760	1211	1211	1744	1744
Length	500	600	500	600	500	600
Watts at 75/65/20	376	445	576	686	844	1000
n-coefficients	1.23	1.23	1.25	1.25	1.28	1.26
Heated surface area (m²)	0.71	0.83	1.11	1.30	1.60	1.88
Weight (kg)	6.12	7.06	9.63	11.10	13.86	15.98
Water contents (l/m)	4.41	5.10	6.89	7.97	9.80	11.40
KM (P/dTn)	3.0343	3.5743	4.285	5.2327	5.6826	7.1623

Type	STRAIGHT/CURVED CHROME					
No of tubes	16	16	25	25	36	36
Height	760	760	1211	1211	1744	1744
Length	500	600	500	600	500	600
Watts at 75/65/20	246	294	379	453	557	667
n-coefficients	1.25	1.25	1.28	1.27	1.30	1.30
Heated surface area (m²)	0.71	0.83	1.11	1.30	1.60	1.88
Weight (kg)	6.12	7.06	9.63	11.10	13.86	15.98
Water contents (l/m)	4.41	5.10	6.89	7.97	9.80	11.40
KM (P/dTn)	1.8179	2.1949	2.5779	3.1188	3.4249	4.1610

CLASSIC MINI TOWEL RAIL



50Δt

(75/65/20°C)


Height mm	Length mm	Max Projection mm	STRAIGHT				STRAIGHT CHROME		
			White UIN	Colour UIN	Heat output Watts Btu/hr		Stelrad UIN	Heat output Watts	Heat output Btu/hr
678	400	100	147000	147000c	273	931	147001	175	597

Δt50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt40 or Δt30 output (see your installer or system designer or download from www.stelradprofessional.com).


For EN442 data, technical and installation information please visit our website: www.stelradprofessional.com and search product downloads.

WALL MOUNTING INFORMATION

All dimensions in mm. Inches in brackets.

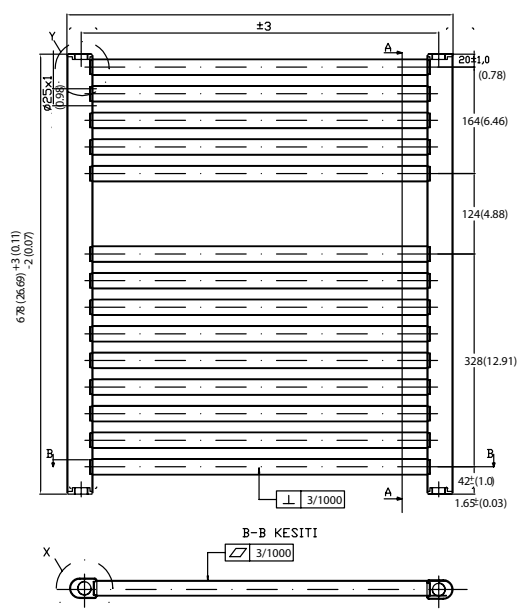

NUMBER OF TUBES ON TOWEL RAILS



EN 442 CERTIFICATION DATA -

CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	WHITE	CHROME
No of tubes	14	14
Height	678	678
Length	400	400
Watts at 75/65/20	273	175
n-coefficients	1.2232	1.2535
Heated surface area (m²/m)	0.51	0.51
Weight (kg/m)	4.57	4.57
Water contents (l/m)	3.20	3.20
KM (P/dTn)	2.2803	1.2983

CONNECTIONS

Each radiator comes with ½" inlet connections as standard.

55 COLOUR OPTIONS. 14-DAY LEAD TIME.

Stelrad Radiators are available in white (RAL 9016) as standard, however this radiator is **now available in a variety of colours within 14 working days.**

STANDARD COLOUR




RAL 9016
Traffic white



Chrome


RAL COLOURS - Satin Finish



1001
Beige



1013
Oyster white



1015
Light ivory



9001
Cream



9002
Grey white




9003
Signal white




9010
Pure white



9016
Traffic white




9018
Papyrus white




9005
Jet black



9017
Traffic black



7001
Silver grey




7011
Iron grey




7015
Slate grey



7016
Anthracite grey




7030
Stone grey




7032
Pebble grey




7035
Light grey




7036
Platinum grey



7037
Dusty grey



7038
Agate grey



7039
Quartz grey




5002
Ultramarine blue




5010
Gentian blue




5012
Light blue



5014
Pigeon blue




5015
Sky blue




5022
Night blue



RAL COLOURS (continued)




5024
Pastel blue




6005
Light moss green



6018
Yellow green




6019
Pastel green




6020
Chrome green



6027
Light green



6033
Mint turquoise



6034
Pastel turquoise




3000
Flame red



3002
Carmine red



3003
Ruby red



3005
Wine red



2003
Pastel orange



2008
Bright red orange



1004
Golden yellow




1016
Sulphur yellow




1021
Colza yellow




3015
Light pink




8014
Sepia



8017
Chocolate brown



7026
Granite



1019
Cappuccino




8028
Terra brown




9011
Graphite black


METALLIC



1247M
Bronze metallic



7001M
Silver metallic



9007M
Grey metallic

Please note: When a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

For further information on RAL colours please visit
www.ralcolorchart.com