

DESIGNER


SERIES



COMPACT
WITH
STYLE K3

50 Δ t

(75/65/20°C)



Height mm	Length mm	Sections	White UIN	Colour UIN	Watts	Heat output Btu/hr
300	1000	30	7433310	7433310c	1287	4391
	2000	60	7433320	7433320c	2574	8783
500	600	18	7453306	7453306c	1187	4050
	700	21	7453307	7453307c	1385	4726
	800	24	7453308	7453308c	1583	5401
	900	27	7453309	7453309c	1781	6077
	1000	30	7453310	7453310c	1979	6753
	1100	33	7453311	7453311c	2177	7428
	1200	36	7453312	7453312c	2375	8104
	1400	42	7453314	7453314c	2771	9455
	1600	48	7453316	7453316c	3166	10803
	1800	54	7453318	7453318c	3562	12154
	2000	60	7453320	7453320c	3958	13505
2400	72	7453324	7453324c	4750	16208	
600	400	12	7463304	7463304c	912	3112
	500	15	7463305	7463305c	1140	3890
	600	18	7463306	7463306c	1368	4668
	700	21	7463307	7463307c	1596	5446
	800	24	7463308	7463308c	1824	6224
	900	27	7463309	7463309c	2052	7002
	1000	30	7463310	7463310c	2280	7779
	1100	33	7463311	7463311c	2508	8558
	1200	36	7463312	7463312c	2736	9336
	1400	42	7463314	7463314c	3192	10892
	1600	48	7463316	7463316c	3648	12447
	1800	54	7463318	7463318c	4104	14003
	2000	60	7463320	7463320c	4560	15559
2400	72	7463324	7463324c	5472	18671	
700	500	15	7473305	7473305c	1277	4357
	600	18	7473306	7473306c	1532	5227
	700	21	7473307	7473307c	1787	6098
	800	24	7473308	7473308c	2042	6968
	900	27	7473309	7473309c	2298	7841
	1000	30	7473310	7473310c	2553	8711
	1100	33	7473311	7473311c	2808	9581
	1200	36	7473312	7473312c	3064	10455
	1400	42	7473314	7473314c	3574	12195
	1600	48	7473316	7473316c	4085	13939
	1800	54	7473318	7473318c	4595	15679
	2000	60	7473320	7473320c	5106	17422

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

Piping connections are the same as the Stelrad Compact.

COLOUR OPTIONS



Comes in White as standard (RAL 9016).

Please note that once a coloured radiator has been ordered, it cannot be cancelled or returned.




COMPACT WITH STYLE K3



WALL MOUNTING AND LUG INFORMATION


All dimensions in mm. Inches in brackets.

REAR ELEVATION

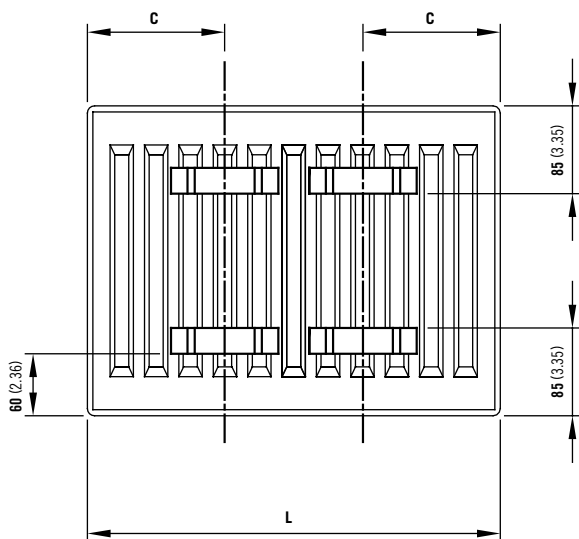


L	C
400 - 1100	133
1200 - 2400	133

SIDE ELEVATION

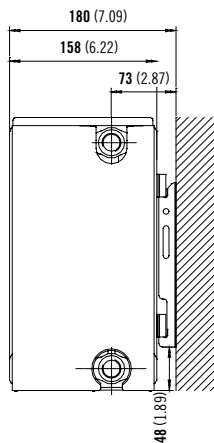

TOP ELEVATION

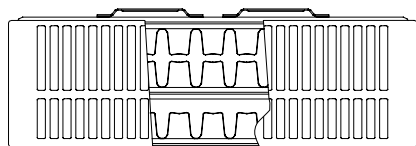

COMPACT WITH STYLE K3





FLOORSTANDING BRACKETS

All dimensions in mm. Inches in brackets.



Floor brackets

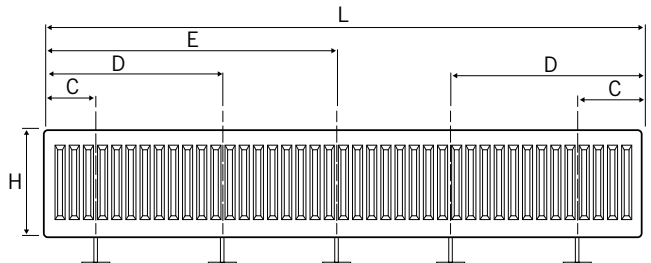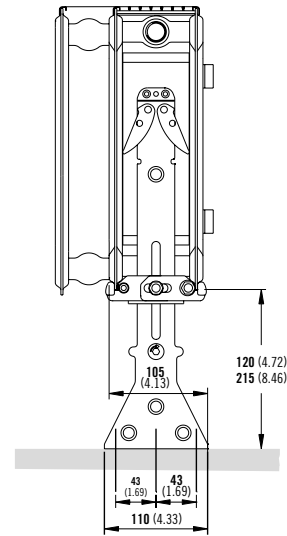


	L	400	500 - 1100	1200	1400 - 1800	2000 - 3000
H	Number	2pc				3pc
300	C	117	150	250	250	250
500	E	-	-	-	-	L/2+17

	L	400	500 - 1100	1200	1400 - 1800	2000	2200	2400	2600	2800	3000
H	Number	2pc			3pc	4pc			5pc		
600	C	117	150	250	250	250			250		
700	D	-	-	-	-	750	817	850	750	817	850
	E	-	-	-	817	-	-	-	L/2+17		

CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.


PIPING OPTIONS

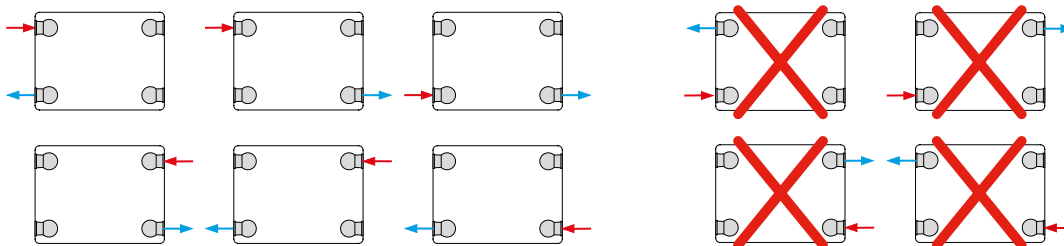

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	K3			
	300	500	600	700
Height	300	500	600	700
W/m at 75/65/20	1349	2056	2389	2712
n-coefficients	1.31	1.32	1.32	1.34
Heated surface area (m2/m)	5.26	9.49	11.61	13.72
Weight (kg/m)	25.20	43.40	52.50	60.77
Water contents (l/m)	5.40	8.33	9.80	11.37
Wall to tap centre (mm)	73	73	73	73

PRESSURE DROPS

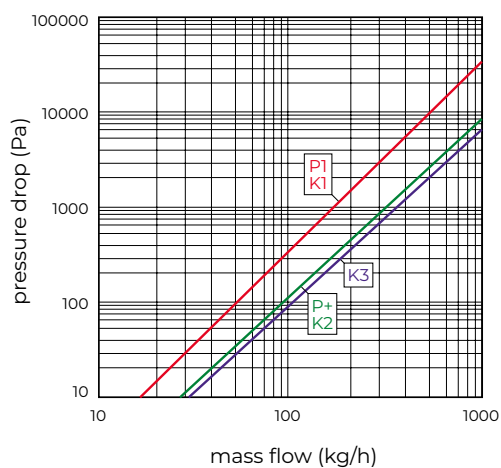

Type	Kv
P1 / K1	1.67
P+ / K2	3.32
K3	3.65

55 COLOUR OPTIONS. 14-DAY LEAD TIME.

Stelrad Radiators are available in white (RAL 9016) as standard, however this radiator is **now available in a variety of colours within 14 working days.**

STANDARD COLOUR




RAL 9016
Traffic white

To request up to 5 colour samples, please email sales@stelrad.com or call **0800 876 6813** with your choices and address details.

The colours shown are reproduced as accurately as this printing process will allow.

RAL COLOURS - Satin Finish



1001
Beige



1013
Oyster white



1015
Light ivory



9001
Cream



9002
Grey white



9003
Signal white



9010
Pure white



9016
Traffic white




9018
Papyrus white




9005
Jet black



9017
Traffic black




7001
Silver grey




7011
Iron grey



7015
Slate grey



7016
Anthacite grey



7030
Stone grey



7032
Pebble grey



7035
Light grey




7036
Platinum grey



7037
Dusty grey



7038
Agate grey




7039
Quartz grey




5002
Ultramarine blue



5010
Gentian blue




5012
Light blue



5014
Pigeon blue



5015
Sky blue




5022
Night blue

Please note: When a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

For further information on RAL colours please visit www.ralcolorchart.com




RAL COLOURS (continued)




5024
Pastel blue



6005
Light moss green



6018
Yellow green



6019
Pastel green




6020
Chrome green



6027
Light green



6033
Mint turquoise



6034
Pastel turquoise



3000
Flame red




3002
Carmine red



3003
Ruby red



3005
Wine red



2003
Pastel orange



2008
Bright red orange



1004
Golden yellow




1016
Sulphur yellow



1021
Colza yellow




3015
Light pink




8014
Sepia




8017
Chocolate brown




7026
Granite



1019
Cappuccino




8028
Terra brown



9011
Graphite black


METALLIC



1247M
Bronze metallic



7001M
Silver metallic



9007M
Grey metallic

Please note: When a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

For further information on RAL colours please visit www.ralcolorchart.com