

STELRAD

SERIES



**COMPACT
1200**

50 Δ t
(75/65/20°C)

K2

Height mm	Length mm	Sections	Stelrad UIN	Watts	Heat output Btu/hr
1200	300	9	31122203	867	2958
	400	12	31122204	1156	3944
	500	15	31122205	1445	4931
	600	18	31122206	1733	5913
	700	21	31122207	2022	6899

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C.

CENTRE TAP TRV




UIN	Elements
14531310	CENTRE TAP TRV STRAIGHT WHITE - 10MM
14531312	CENTRE TAP TRV STRAIGHT WHITE - 1/2IN
14531315	CENTRE TAP TRV STRAIGHT WHITE - 15MM
14531410	CENTRE TAP TRV STRAIGHT CHROME - 10MM
14531412	CENTRE TAP TRV STRAIGHT CHROME - 1/2IN
14531415	CENTRE TAP TRV STRAIGHT CHROME - 15MM
14531510	CENTRE TAP TRV ANGLED L WHITE - 10MM
14531512	CENTRE TAP TRV ANGLED L WHITE - 1/2IN
14531515	CENTRE TAP TRV ANGLED L WHITE - 15MM
14531610	CENTRE TAP TRV ANGLED L CHROME - 10MM
14531612	CENTRE TAP TRV ANGLED L CHROME - 1/2IN
14531615	CENTRE TAP TRV ANGLED L CHROME - 15MM

COMPACT 1200



WALL MOUNTING INFORMATION

All dimensions in mm.

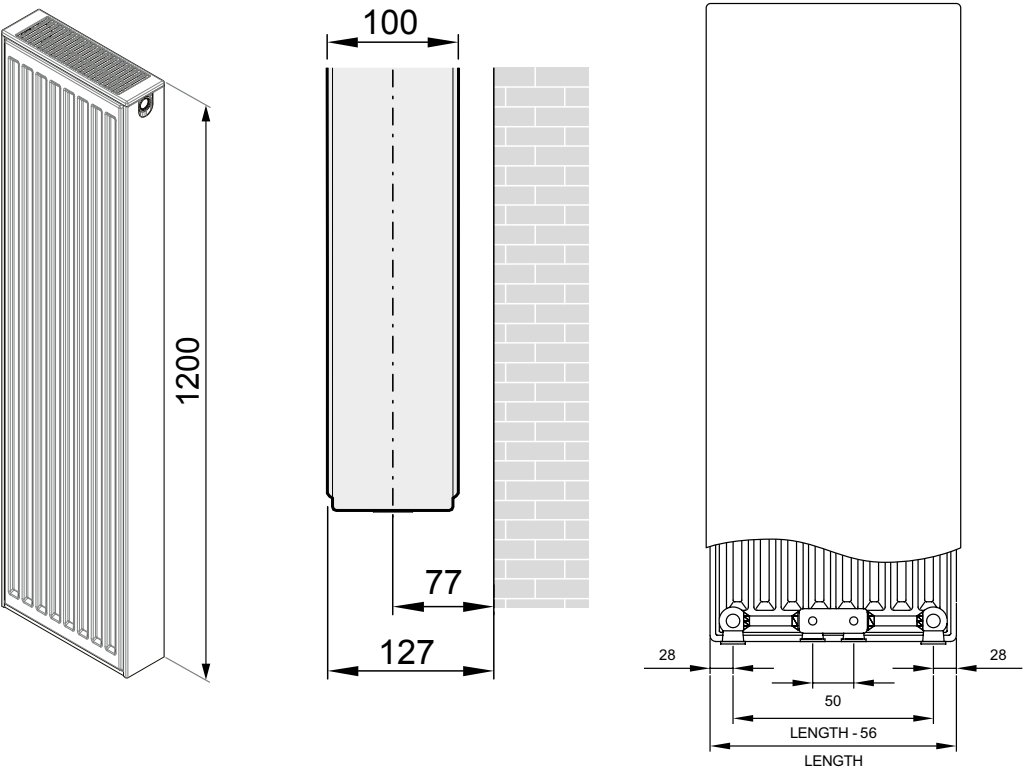


Comes complete with Stelrad's class leading safety bracket.

CONNECTIONS

Each radiator comes with ½" inlet connections as standard.

MOUNTING BRACKETS

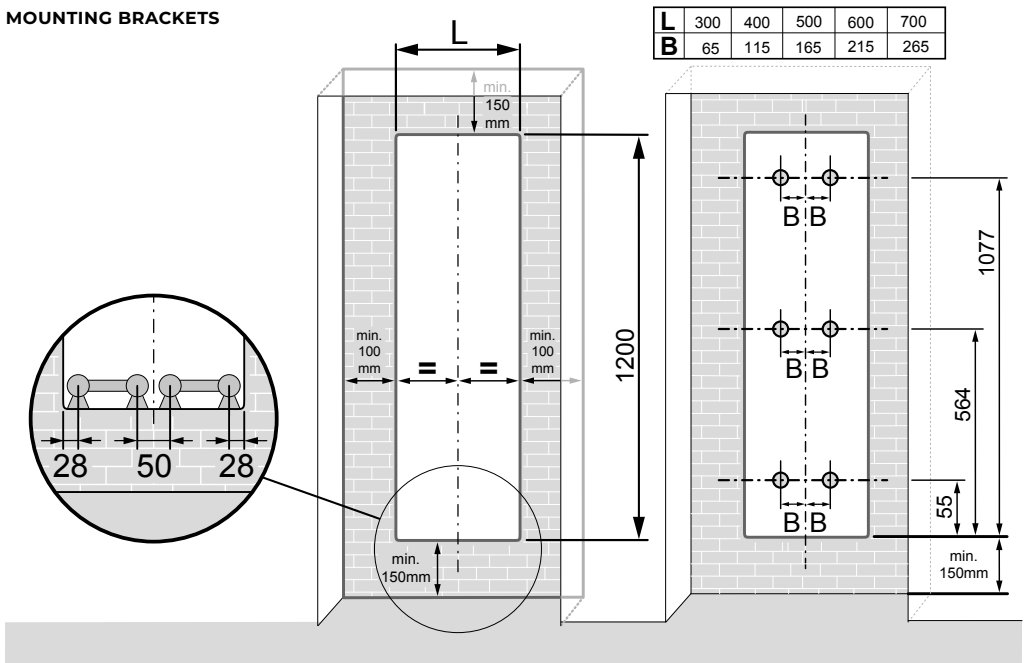


EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442


Type	K2
Height	1200
W/m at 75/65/20	2889
n-coefficients	1.33
Heated surface area (m²/m)	12.75
Weight (kg/m)	57.3
Water contents (l/m)	12.0

PIPING OPTIONS

Front view

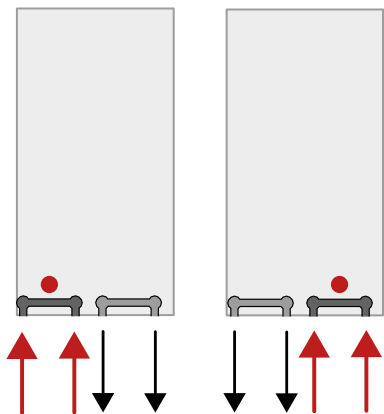

PRESSURE DROPS

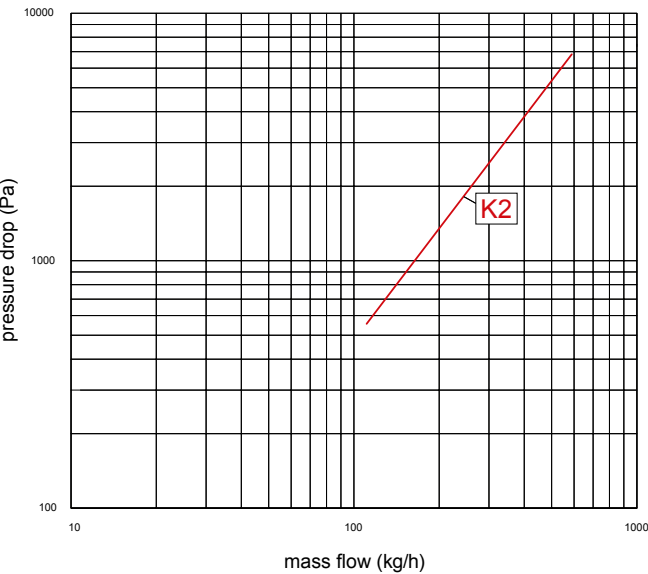

Type	Kv
K2	1.85