

STELRAD

SERIES




**COMPACT
200**

COMPACT 200



50 Δ t
(75/65/20°C)

K3



K4



Height mm	Length mm	Sections	Stelrad UIN	Heat output		Stelrad UIN	Heat output	
				Watts	Btu/hr		Watts	Btu/hr
200	800	24	20023308	746	2545	20024408	970	3310
	1000	30	20023310	933	3183	20024410	1212	4135
	1200	36	20023312	1120	3821	20024412	1454	4961
	1400	42	20023314	1306	4456	20024414	1697	5790
	1600	48	20023316	1493	5094	20024416	1939	6616
	1800	54	20023318	1679	5729	20024418	2182	7445
	2000	60	20023320	1866	6367	20024420	2424	8271

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelrad.com).


For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

COMPACT 200



FLOOR MOUNTING INFORMATION


All dimensions in mm.

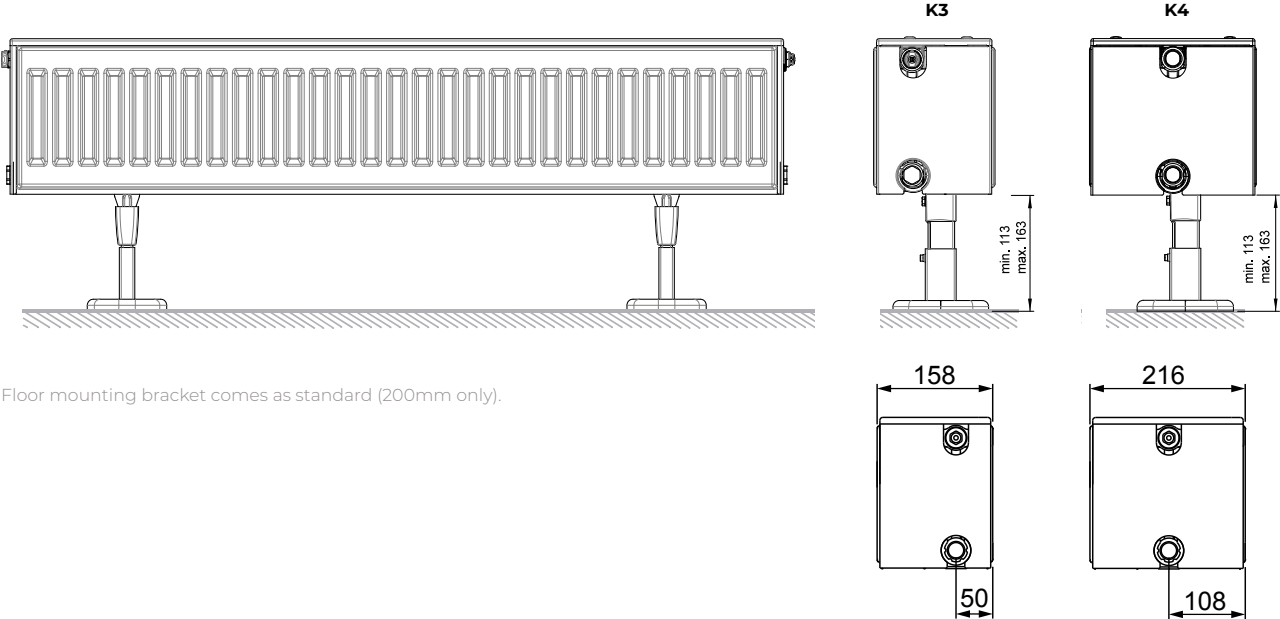

Floor mounting bracket comes as standard (200mm only).

PANEL INFORMATION


All dimensions in mm.

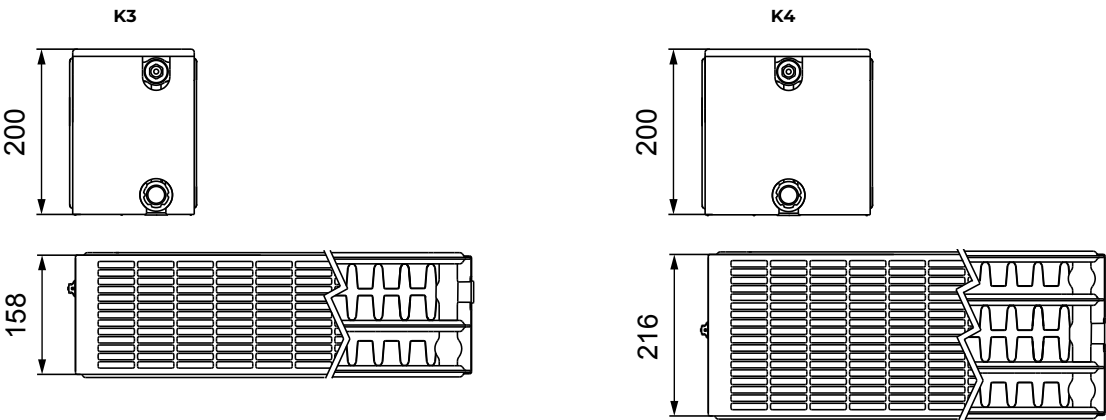

CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.


PIPING OPTIONS

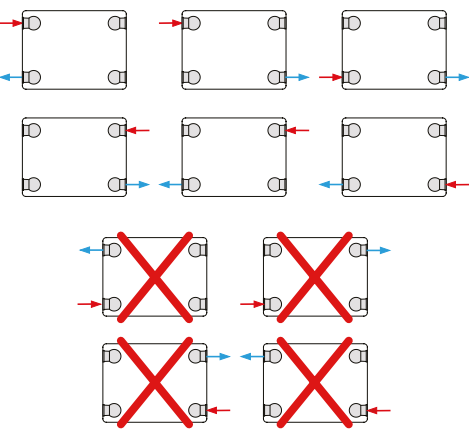

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	K3	K4
Height	200	200
W/m at 75/65/20	933	1212
n-coefficients	1.29	1.30
Heated surface area (m²/m)	3.08	4.10
Weight (kg/m)	15.40	20.80
Water contents (l/m)	4.20	5.60
K _m	5.9610	7.4320

PRESSURE DROPS

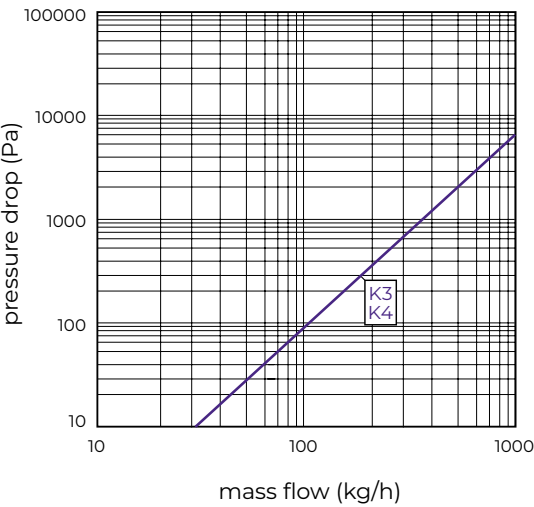

Type	Kv
K3 / K4	3.65