

VITA

SERIES



**CONCORD
VERTICAL**

50 Δ t

(75/65/20°C)

SINGLE



Height mm	Length mm	Elements	White UIN	Colour UIN	Watts	Heat output Btu/hr
1800	444	6	448340	448340c	852	2907
	592	8	448341	448341c	1136	3876
	740	10	448342	448342c	1420	4845
2000	444	6	448343	448343c	942	3214
	592	8	448344	448344c	1256	4286
	740	10	448345	448345c	1570	5357

DOUBLE



Height mm	Length mm	Elements	White UIN	Colour UIN	Watts	Heat output Btu/hr
1800	444	6	448640	448640c	1254	4279
	592	8	448641	448641c	1672	5705
	740	10	448642	448642c	2090	7131
2000	444	6	448643	448643c	1386	4729
	592	8	448644	448644c	1848	6306
	740	10	448645	448645c	2310	7882

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelradprofessional.com).

For EN442 data, technical and installation information please visit our website: www.stelradprofessional.com and search product downloads.

COLOUR OPTIONS

Comes in White as standard (RAL 9016).

Please note that once a coloured radiator has been ordered, it cannot be cancelled or returned.




www.stelradprofessional.com

Telephone: 0800 876 6813

WALL MOUNTING INFORMATION


All dimensions in mm.

Type	From back of radiator to wall		From wall to centre of connections		From front of radiator to wall	
Single Vertical	24mm	0.98inch	43mm	1.69inch	71mm	2.80inch
Double Vertical	40mm	1.57inch	67mm	2.64inch	95mm	3.74inch

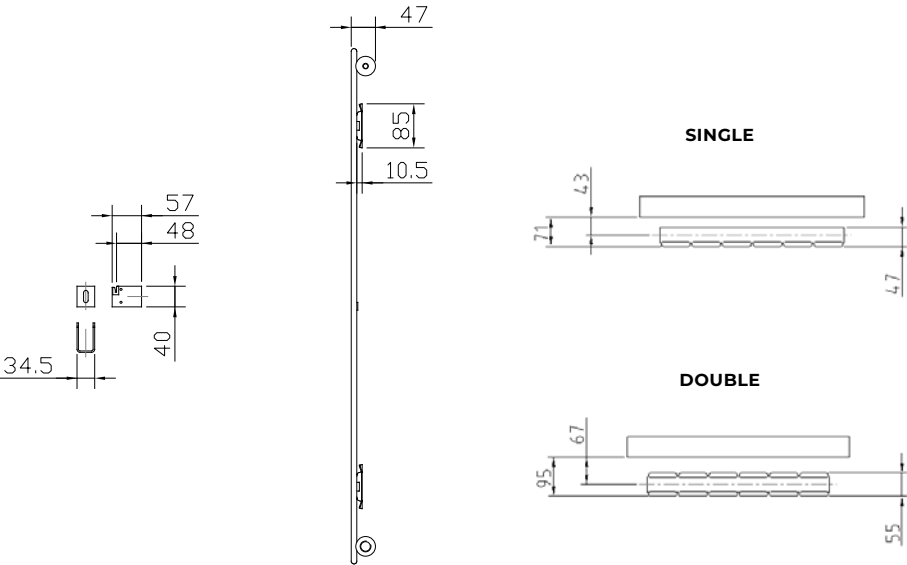

FIXING POSITIONS - SINGLE & DOUBLE

All dimensions in mm.

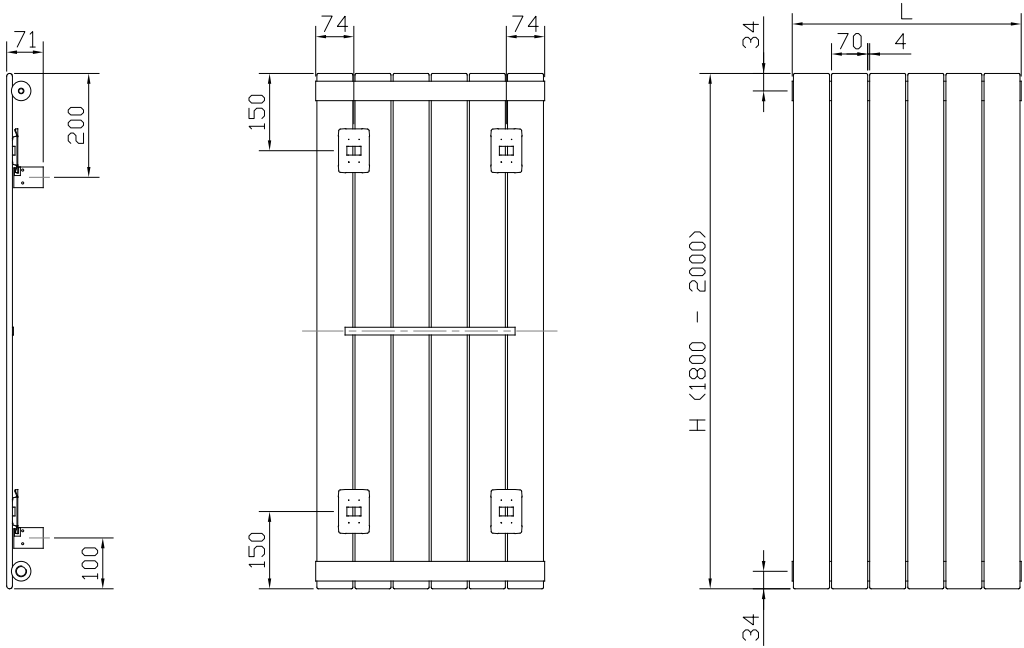


CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	Vertical	
Height	1800	2000
W/m at 75/65/20	1846	2041
n-coefficients	1.31	1.31
Heated surface area (m ² /m)	4.01	4.42
Weight (kg/m)	44.2	49.4
Water contents (l/m)	14.3	16.9
Wall to tap centre (mm)	43	43

PIPING INSTRUCTIONS



55 COLOUR OPTIONS. 14-DAY LEAD TIME.

Stelrad Radiators are available in white (RAL 9016) as standard, however this radiator is **now available in a variety of colours within 14 days.**

STANDARD COLOUR



RAL 9016
Traffic white

To request up to 5 colour samples, please email sales@stelrad.com or call **0800 876 6813** with your choices and address details.

The colours shown are reproduced as accurately as this printing process will allow.

RAL COLOURS



1001
Beige



1013
Oyster white



1015
Light ivory



9001
Cream



9002
Grey white



9003
Signal white



9010
Pure white



9016
Traffic white




9018
Papyrus white




9005
Jet black




9017
Traffic black




7001
Silver grey




7011
Iron grey



7015
Slate grey



7016
Anthracite grey




7030
Stone grey




7032
Pebble grey



7035
Light grey




7036
Platinum grey



7037
Dusty grey



7038
Agate grey




7039
Quartz grey




5002
Ultramarine blue



5010
Gentian blue




5012
Light blue



5014
Pigeon blue



5015
Sky blue



5022
Night blue

Please note: When a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

For further information on RAL colours please visit www.ralcolorchart.com



RAL COLOURS (continued)



METALLIC



Please note: When a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

For further information on RAL colours please visit
www.ralcolorchart.com