

SOFTLINE

SERIES




**COMPACT
1200**

SOFTLINE COMPACT 1200



50 Δ t

(75/65/20°C)



Height mm	Length mm	Sections	Stelrad UIN	Watts	Heat output Btu/hr
1200	300	9	87122203	867	2958
	400	12	87122204	1156	3944
	500	15	87122205	1445	4931
	600	18	87122206	1733	5913
	700	21	87122207	2022	6899

Δt_{50} is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt_{40} or Δt_{30} output (see your installer or system designer or download from stelradprofessional.com).

For EN442 data, technical and installation information please visit stelradprofessional.com and search product downloads.

CENTRE TAP TRV



UIN	Elements
14531310	CENTRE TAP TRV STRAIGHT WHITE -10MM
14531312	CENTRE TAP TRV STRAIGHT WHITE -1/2IN
14531315	CENTRE TAP TRV STRAIGHT WHITE -15MM
14531410	CENTRE TAP TRV STRAIGHT CHROME -10MM
14531412	CENTRE TAP TRV STRAIGHT CHROME -1/2IN
14531415	CENTRE TAP TRV STRAIGHT CHROME -15MM
14531510	CENTRE TAP TRV ANGLED L WHITE -10MM
14531512	CENTRE TAP TRV ANGLED L WHITE -1/2IN
14531515	CENTRE TAP TRV ANGLED L WHITE -15MM
14531610	CENTRE TAP TRV ANGLED L CHROME -10MM
14531612	CENTRE TAP TRV ANGLED L CHROME -1/2IN
14531615	CENTRE TAP TRV ANGLED L CHROME -15MM
14531710	CENTRE TAP TRV ANGLED R WHITE -10MM
14531712	CENTRE TAP TRV ANGLED R WHITE -1/2IN
14531715	CENTRE TAP TRV ANGLED R WHITE -15MM
14531810	CENTRE TAP TRV ANGLED R CHROME -10MM
14531812	CENTRE TAP TRV ANGLED R CHROME -1/2IN
14531815	CENTRE TAP TRV ANGLED R CHROME -15MM




www.stelrad.com
Telephone: 0800 876 6813

SOFTLINE COMPACT 1200



WALL MOUNTING INFORMATION

All dimensions in mm.

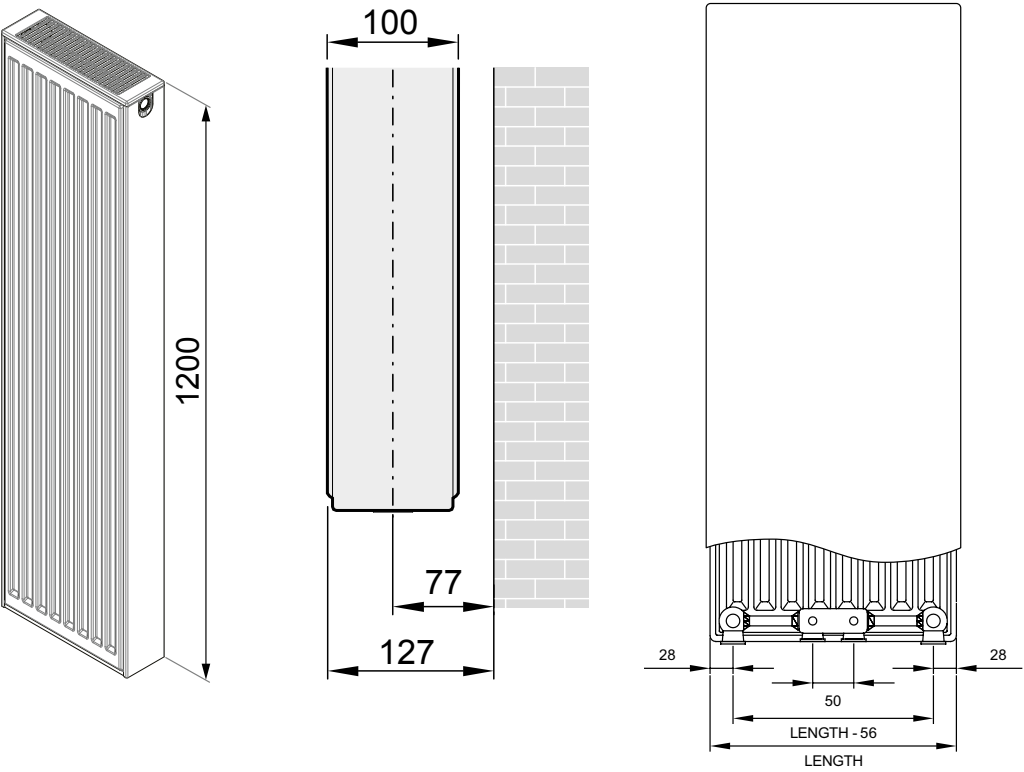


Comes complete with Stelrad's class leading safety bracket.

CONNECTIONS

Each radiator comes with ½" inlet connections as standard.

MOUNTING BRACKETS

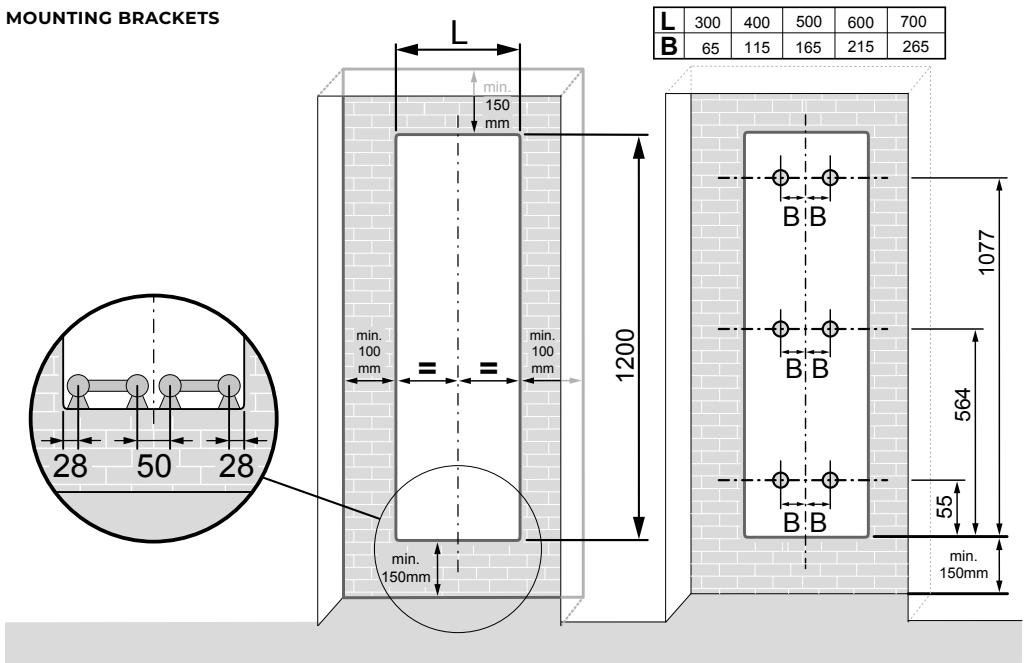


EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442


Type	K2
Height	1200
W/m at 75/65/20	2889
n-coefficients	1.33
Heated surface area (m²/m)	12.75
Weight (kg/m)	57.3
Water contents (l/m)	12.0

PIPING OPTIONS

Front view

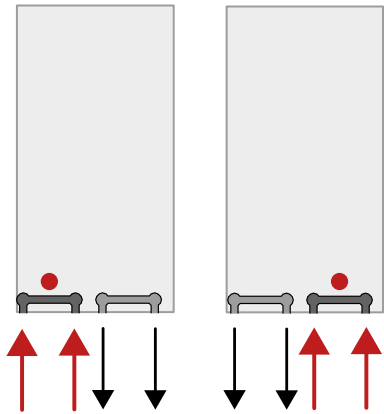

PRESSURE DROPS

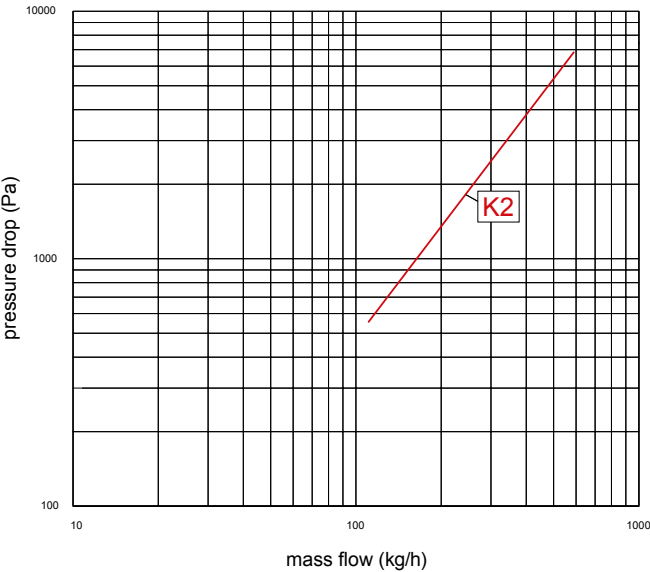

Type	Kv
K2	1.85