


DeLonghi



**DELONGHI
MULTICOLUMN
VERTICAL**

DELONGHI MULTICOLUMN VERTICAL

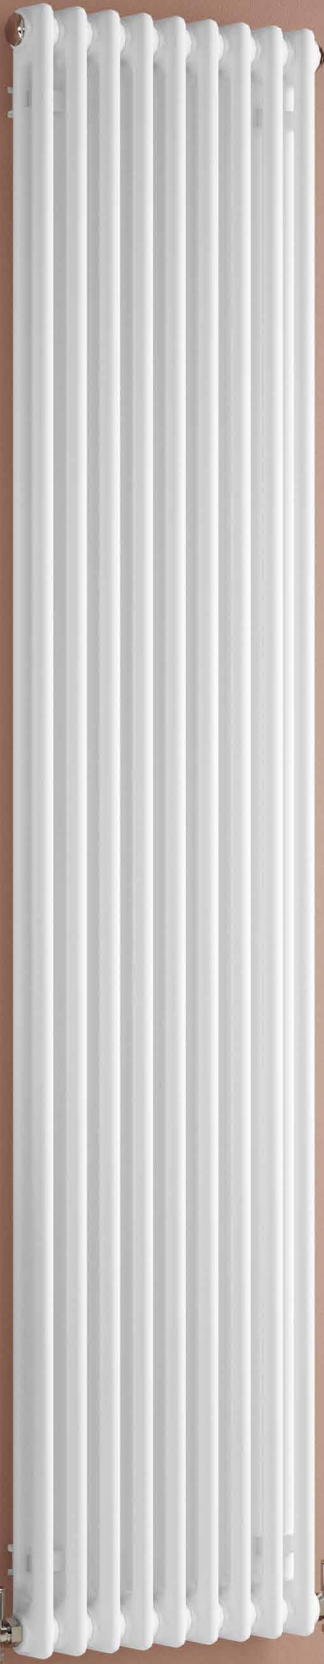

50 Δ t

(75/65/20°C)

Height mm	Length mm	UIN	Number of Sections	3 COLUMN		4 COLUMN	
				Output dt50 Watts	Output dt50 Btu/hr	Output dt50 Watts	Output dt50 Btu/hr
1800	302	763023	6	-	-	1392	4750
	394	763024	8	-	-	1856	6333
	486	76305	10	-	-	2320	7916
2000	302	763026	6	1164	3972	-	-
	394	763027	8	1552	5296	-	-
	486	763028	10	1940	6620	-	-

Δ t50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δ t40 or Δ t30 output (see your installer or system designer or download from www.stelradprofessional.com).


Due to production tolerances, the length of the product and therefore the tap centres could contain a variation of +/- 1.5% of the overall stated length.

For EN442 data, technical and installation information please visit our website: www.stelradprofessional.com and search product downloads.

TUBE DIMENSIONS – 3 COLUMN

25mm round tubes.

Dimensions are in millimeters (mm)

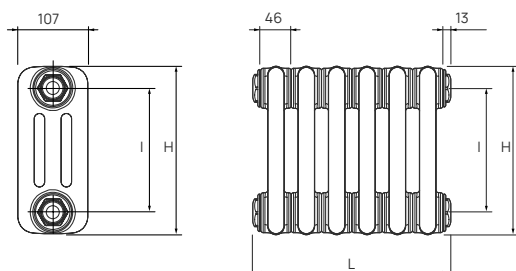


H: height
I: pipe centre (H-70)
L: lengths with fitted connections elements x 46 + 26

TUBE DIMENSIONS – 4 COLUMN

25mm round tubes.

Dimensions are in millimeters (mm)

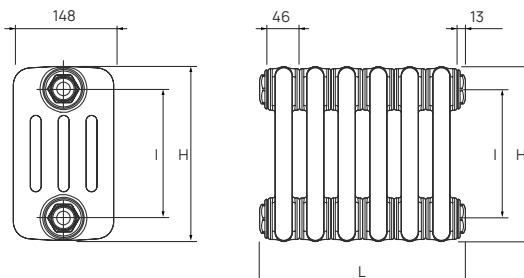

H: height
I: pipe centre (H-70)
L: lengths with fitted connections elements x 46 + 26

EN 442 CERTIFICATION DATA - CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	3 Columns	4 Columns
Height	2000	1800
W/m at 75/65/20	4217	5043
n-coefficients	1.31	1.31
Weight (kg/m) - Elements	86.96	115.22
Water contents (l/m)	56.52	67.39
Wall to tap centre (mm)	84 / 94	104 / 114

CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.



www.stelradprofessional.com

Telephone: 0800 876 6813