

VITA

SERIES



COLUMN
HORIZONTAL

COLUMN HORIZONTAL



50 Δ t

(75/65/20°C)

Height mm	Length mm	Elements	2 COLUMN				3 COLUMN				4 COLUMN			
			White UIN	Colour UIN	Heat output Watts	Heat output Btu/hr	White UIN	Colour UIN	Heat output Watts	Heat output Btu/hr	White UIN	Colour UIN	Heat output Watts	Heat output Btu/hr
300	440	9	-	-	-	-	463000	463000c	298	1016	463007	463007c	381	1298
	624	13	-	-	-	-	463001	463001c	430	1467	463008	463008c	550	1875
	854	18	-	-	-	-	463002	463002c	596	2032	463009	463009c	761	2596
	1038	22	-	-	-	-	463003	463003c	728	2483	463010	463010c	931	3173
	1268	27	-	-	-	-	463004	463004c	894	3048	463011	463011c	1142	3895
	1452	31	-	-	-	-	463005	463005c	1026	3499	-	-	-	-
	1866	40	-	-	-	-	463006	463006c	1324	4515	-	-	-	-
500	440	9	-	-	-	-	463016	463016c	464	1584	463023	463023c	615	2096
	624	13	463012	463012c	494	1685	463017	463017c	671	2287	463024	463024c	888	3028
	854	18	463013	463013c	684	2332	463018	463018c	929	3167	463025	463025c	1229	4192
	1038	22	463014	463014c	836	2851	463019	463019c	1135	3871	463026	463026c	1503	5124
	1268	27	463015	463015c	1026	3499	463020	463020c	1393	4751	463027	463027c	1844	6288
	1452	31	-	-	-	-	463021	463021c	1600	5455	-	-	-	-
	1866	40	-	-	-	-	463022	463022c	2064	7038	-	-	-	-
600	440	9	-	-	-	-	463032	463032c	547	1866	463039	463039c	730	2489
	624	13	463028	463028c	582	1986	463033	463033c	790	2695	463040	463040c	1054	3595
	854	18	463029	463029c	806	2750	463034	463034c	1094	3732	463041	463041c	1460	4978
	1038	22	463030	463030c	986	3361	463035	463035c	1338	4561	463042	463042c	1784	6084
	1268	27	463031	463031c	1210	4125	463036	463036c	1642	5598	463043	463043c	2190	7467
	1452	31	-	-	-	-	463037	463037c	1885	6427	-	-	-	-
	1866	40	-	-	-	-	463038	463038c	2432	8293	-	-	-	-
750	440	9	-	-	-	-	-	-	-	-	463049	463049c	900	3069
	624	13	-	-	-	-	-	-	-	-	463050	463050c	1300	4433
	854	18	-	-	-	-	463044	463044c	1341	4573	463051	463051c	1800	6138
	1038	22	-	-	-	-	463045	463045c	1639	5589	463052	463052c	2200	7502
	1268	27	-	-	-	-	463046	463046c	2012	6859	463053	463053c	2700	9207
	1452	31	-	-	-	-	463047	463047c	2310	7875	-	-	-	-
	1866	40	-	-	-	-	463048	463048c	2980	10162	-	-	-	-

Δt_{50} is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt_{40} or Δt_{30} output (see your installer or system designer or download from www.stelradprofessional.com).

Due to production tolerances, the length of the product and therefore the tap centres could contain a variation of +/- 1.5% of the overall stated length.

For EN442 data, technical and installation information please visit our website: www.stelradprofessional.com and search product downloads.

Floor supporting brackets are available.

COLOUR OPTIONS

Comes in White as standard (RAL 9016).


Please note that once a coloured radiator has been ordered, it cannot be cancelled or returned.



www.stelradprofessional.com

Telephone: 0800 876 6813

CLASSIC COLUMN HORIZONTAL FLOOR SUPPORTING BRACKETS

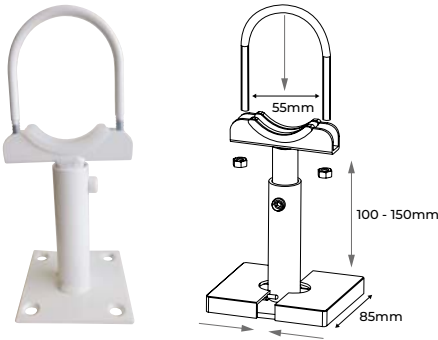


UIN 148137 White
(sold in pairs)

TUBE DIMENSIONS – 2 COLUMN

25mm Vertical round tubes.

Dimensions are in millimeters (mm)

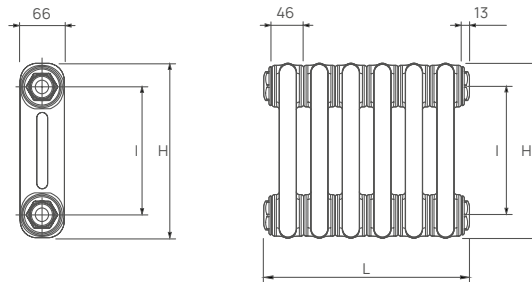


H: height
I: pipe centre (H-70)
L: lengths with fitted connections elements x 46 + 26

TUBE DIMENSIONS – 3 COLUMN

25mm Vertical round tubes.

Dimensions are in millimeters (mm)

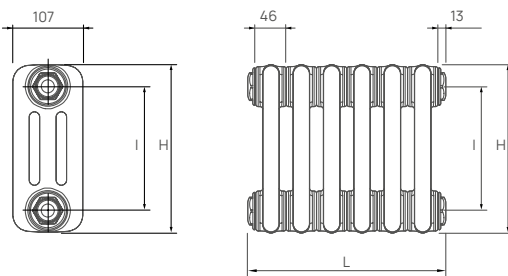


H: height
I: pipe centre (H-70)
L: lengths with fitted connections elements x 46 + 26

TUBE DIMENSIONS – 4 COLUMN

25mm Vertical round tubes.

Dimensions are in millimeters (mm)

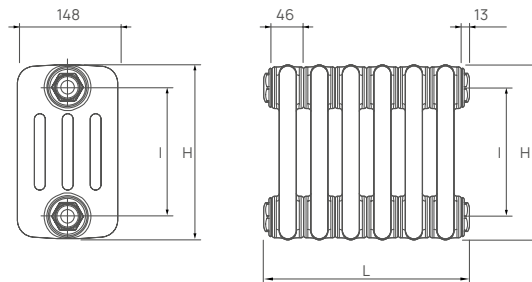


H: height
I: pipe centre (H-70)
L: lengths with fitted connections elements x 46 + 26

CONNECTIONS

Each radiator comes with 1/2" inlet connections as standard.

PIPING OPTIONS



EN 442 CERTIFICATION DATA – CETIAT TESTED IN ACCORDANCE WITH BS EN 442

Type	2 Columns		3 Columns				4 Columns			
	500	600	300	500	600	750	300	500	600	750
Height	500	600	300	500	600	750	300	500	600	750
W/m at 75/65/20	826	974	720	1122	1322	1620	920	1485	1763	2174
n-coefficients	1.26	1.26	1.25	1.26	1.26	1.27	1.25	1.26	1.27	1.28
Weight (kg/m)	17.39	19.57	10.87	21.74	28.26	36.96	19.57	32.61	39.13	47.83
Water contents (l/m)	13.04	15.22	13.04	17.39	21.74	23.91	17.39	23.91	26.08	32.61
Wall to tap centre (mm)	63 / 73	63 / 73	84 / 94	84 / 94	84 / 94	84 / 94	104 / 114	104 / 114	104 / 114	104 / 114

55 COLOUR OPTIONS. 14-DAY LEAD TIME.

Stelrad Radiators are available in white (RAL 9016) as standard, however this radiator is **now available in a variety of colours within 14 working days.**

STANDARD COLOUR




RAL 9016
Traffic white

To request up to 5 colour samples, please email sales@stelrad.com or call **0800 876 6813** with your choices and address details.

The colours shown are reproduced as accurately as this printing process will allow.

RAL COLOURS - Satin Finish



1001
Beige



1013
Oyster white



1015
Light ivory



9001
Cream



9002
Grey white



9003
Signal white




9010
Pure white



9016
Traffic white



9018
Papyrus white



9005
Jet black



9017
Traffic black



7001
Silver grey




7011
Iron grey




7015
Slate grey



7016
Anthacite grey



7030
Stone grey



7032
Pebble grey




7035
Light grey




7036
Platinum grey



7037
Dusty grey



7038
Agate grey



7039
Quartz grey




5002
Ultramarine blue



5010
Gentian blue




5012
Light blue



5014
Pigeon blue



5015
Sky blue




5022
Night blue


Please note: When a coloured radiator or radiators have been ordered they cannot be cancelled or returned.



RAL COLOURS (continued)




5024
Pastel blue




6005
Light moss green



6018
Yellow green




6019
Pastel green




6020
Chrome green



6027
Light green



6033
Mint turquoise



6034
Pastel turquoise




3000
Flame red



3002
Carmine red



3003
Ruby red



3005
Wine red



2003
Pastel orange



2008
Bright red orange



1004
Golden yellow




1016
Sulphur yellow



1021
Colza yellow




3015
Light pink



8014
Sepia



8017
Chocolate brown



7026
Granite



1019
Cappuccino




8028
Terra brown




9011
Graphite black


METALLIC



1247M
Bronze metallic



7001M
Silver metallic



9007M
Grey metallic

Please note: When a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

For further information on RAL colours please visit
www.ralcolorchart.com